



# Installation Instructions

## Door Jackets

### Vehicle Application

- All Jeep CJ, Wrangler and Wrangler Unlimited Models JK 2007-2009 and all earlier models
- Part Number: 51666

INSTALLATION TIME	SKILL LEVEL				
 <b>1/4 Hours</b>	<table border="1"><tr><td><b>1</b></td><td>2</td><td>3</td><td>4</td></tr></table> <b>1 - Easy</b>	<b>1</b>	2	3	4
<b>1</b>	2	3	4		
TOOLS					
 Adjustable Wrench	 Torx Wrench <b>T40</b>	 Safety Glasses			



# Door Jackets – Installation Instructions

## Parts List

Door Jacket


Qty - 2

### 1 Prepare to Remove the Door – JK 2007 Vehicles Only (earlier models skip to Step 3)

Roll the window completely down.

Fold in the mirror.

Locate the door electrical connector (under the dashboard or behind a panel near the front passenger seat belts). Disconnect the connector by sliding the red part and pulling, as shown below.


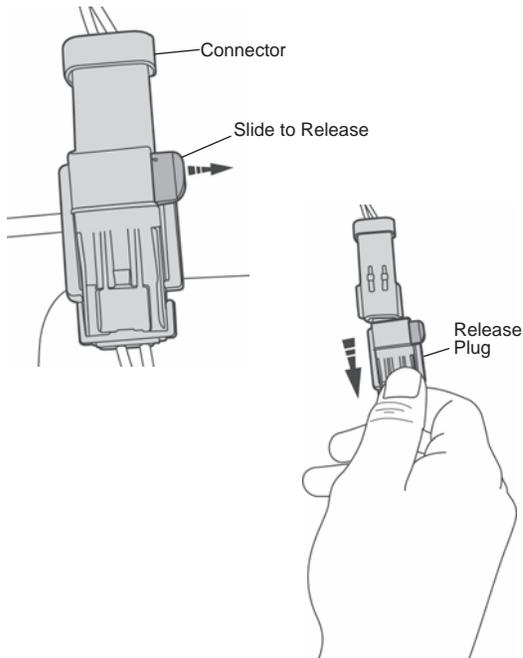


### 2 Prepare to Remove the Door – JK 2007 Vehicles Only (earlier models skip to Step 3)

Use a T40 Torx wrench to remove the nuts under the hinges.

Slip the security strap off the pin inside the door.

Remove Nuts from Hinges

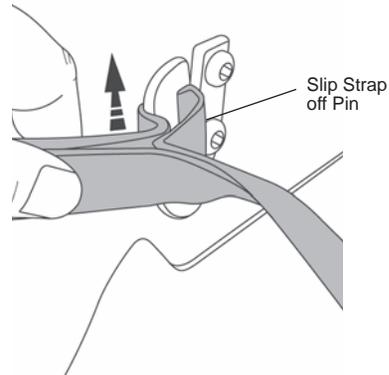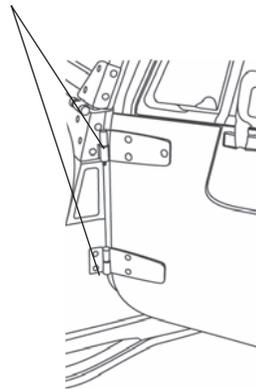

### 3 Prepare to Remove the Door (JK models skip to Step 4)



Roll the window completely down.

Fold in the mirror.

Use an adjustable wrench to remove the nuts under the hinges.

Slip the security strap off the pin inside the door.

Remove Nuts from Hinges

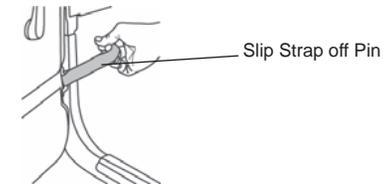


## Door Jackets – Installation Instructions

**! WARNING** The doors can weigh in excess of 50 lbs. Please handle with caution.

### 4 Removing the Door (option 1)

Slip the Door Jacket over the door and close the zippers as far as possible. The jacket may be oriented with the two straps either to the inside or outside of the door.

Lift up and out using the two handles, raising the door until the pins are free of the hinges. Lower gently to the ground.

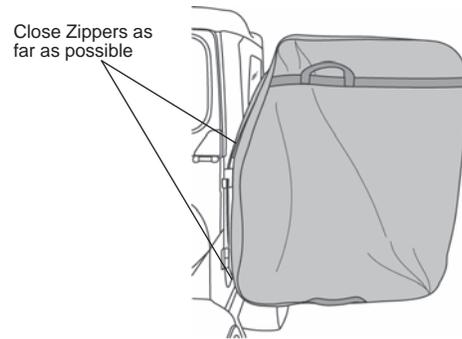

**NOTE** If removing Lower Steel Door with Soft Upper, always lift the door from the bottom, grasping the steel door section.

**! WARNING** The doors can weigh in excess of 50 lbs. Please handle with caution.

### 5 Removing the Door (option 2) - 2 People

Lift the door up and out of the hinges.

While one person holds the Door Jacket open, place the door into the jacket.

**NOTE** If removing Lower Steel Door with Soft Upper, always lift the door from the bottom, grasping the steel door section.



### 6 Close Zippers (both options)

Close the zippers completely with the zipper pulls at the bottom corner of the door.

### 7 Transporting and Storing the Door

Always carry the Door Jackets with the top of the door up. Do not slide the Door Jacket across the ground.

Store door upright standing on the ground.



## Door Jackets – Installation Instructions

---

### Care and Maintenance of your Door Jacket

Your Door Jacket is made of the finest materials available. To keep it looking new and for the maximum possible wear, it will need periodic cleaning and maintenance.

**Washing:** The fabric should be washed often using soap, warm water and a soft bristle brush. Rinse with clear water to remove all traces of soap.

**Zippers:** Keeping the zipper cleaned and lubricated with a silicone lubricant will help prevent damage and keep the zippers in a smooth working condition. If a zipper opens behind the slider, the slider may have been spread apart. This problem can usually be repaired by using an ordinary pair of pliers to bring the sides back into parallel. Return slider to the end of the zipper in the normal Open position. Squeeze lightly at first and test the zipper. If the zipper continues to remain open squeeze more firmly with the pliers and try the zipper again. Repeat this procedure until the zipper operates correctly.

