


## Installation Instructions for 40/60 & 60/40 Seats

(This Installation will cover the full process of a 40-60 split back with soild bench and a 40-60 split back with split bench that come with or with out middle console.)

### Before You Begin...

Remove the headrests completely from the seats: There are a couple ways to remove headrests.

- A. Press the button on the base of the post and pull the headrest up until it disengages from the seat.
- B. If there are no buttons, locate small holes on the base. Insert a wire( or an unbent paperclip) until you hear a click, then pull the headrest up.

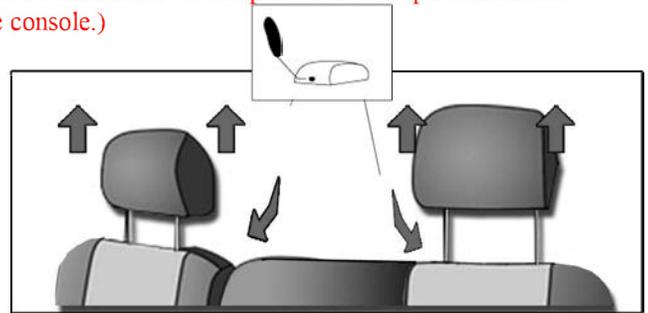

Note: The covers will be tight and the fabric will cling to your original upholstery.

-- DO NOT USE EXCESSIVE FORCE--

### Seat Backs...

1. Find the cover for the Seat Back by matching the cut outs on the seat cover with any levers or knobs on the seat.
2. Due to different seat configurations, seat back installaions will vary.
  - a. If your seat back is ABLE to fold foward make sure the flap with hook and loop fastener is facing the front of the seat, then slide the cover down over the seat back (Figure 2a)
  - b. If your Seat Back is UNABLE to fold forward your seat cover will come equipt with laces, belts and hook and loop fastener. Slide the laces behind the Seat Back until you are able to securely attach them to the belts provided. (Figure 2b)

Figure 2a


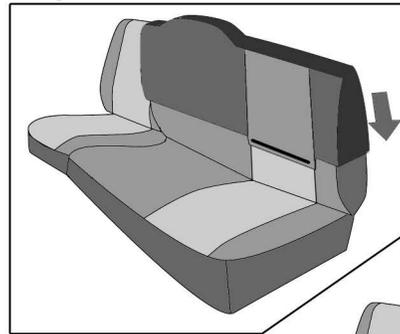


Figure 2b

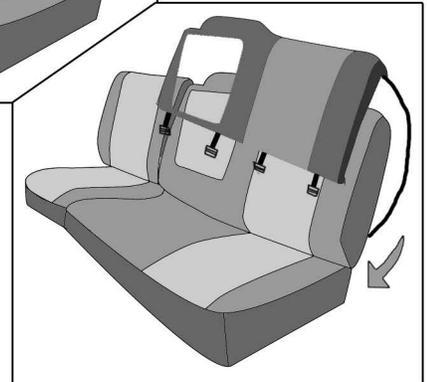

(Note: A. In some installations, the front flap hook and loop fastener attaches to the original fabric in between the seat.  
 B. If cover has plastic wedges, they will hook onto the seat once they have been tucked in.

Figure 3




Figure 3





Figure 4

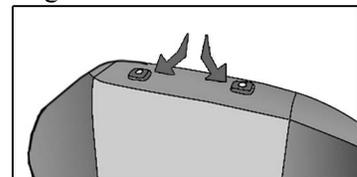

3. Once the cover is secure with a tight snug fit proceed to insert the hook and loop fastener in between the seat. (See Figure 3)
4. Then proceed to insert the fabric cut outs under the headrest panels. (See Figure 4)

# Installation Instructions for 40/60 & 60/40 Seats

(This Installation will cover the full process of a 40-60 split back with solid bench and a 40-60 split back with split bench that come with or without middle console.)

## Seat Bottoms...

1. Find the cover for the seat bottom by matching the cut outs on the seat cover with any levers or knobs on the seat.
2. Due to different seat configurations seat bottoms will vary in installation.
  - a. If your seat bottom is ABLE to fold up place the cover over the seat bottom and feed the laces underneath the seat bottom. (See Figure 5)
  - b. If your seat bottom is UNABLE to fold up simply place the seat cover over the seat then begin to feed the laces in between the seat. (See Figure )
3. Proceed by attaching the laces to their appropriate belts until you achieve a tight snug fit.

### *\* For Solid Seat Bottoms \**

The Seat Bottom can be removed from the car by detaching the clips in each side by pulling the cushion up or pulling the release lever on each side . Then follow steps 2 - 3. (See Figure 6a)

## Middle Console...

1. Find the cover for the middle console by matching the cut outs on the seat cover with any levers or knobs or cupholders the seat may have.
2. Slip the cover over the console making sure the fabric with hook and loop fastener is facing the front of the seat. Once the cover is pulled all the way down proceed to insert the hook and loop fastener in between the seat. (See Figure 7)
3. Once the cover is secure with a tight snug fit proceed to attach the hook and loop fastener to the back of the cover.

## Arm rests...

1. To attach the armrest simply slip the arm rest cover through the arm of the chair, keep in mind that some force will be needed to pull the cover all the way through. (See Figure 8)

## Headrests...

1. Fit the headrest covers over the headrest by working them down.
2. Secure the cover with the hook and loop fastener.
3. Reapply the headrest to the seat.




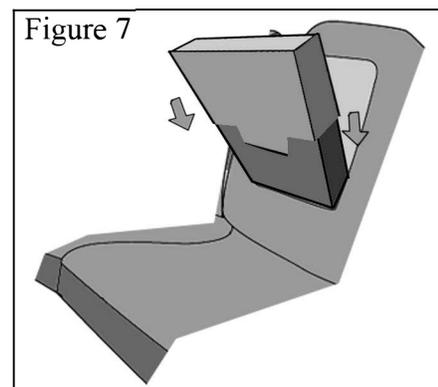


Figure 8

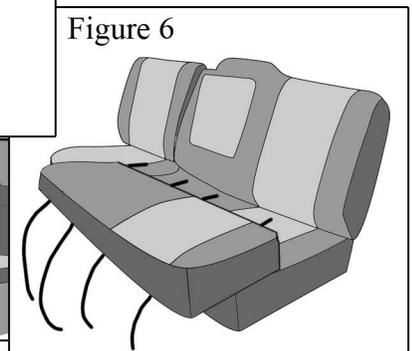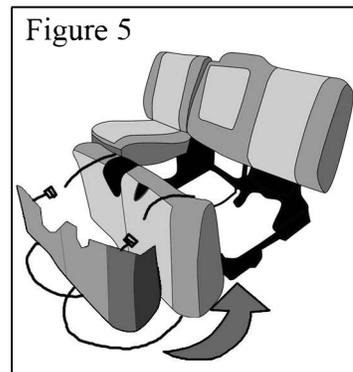