

Instructions: *Golf Car Enclosures*

⚠ WARNING


Make sure your enclosure is on properly and securely fastened before operating your golf car.

⚠ WARNING

Enclosures do NOT protect against noise, engine exhaust, chemicals, collision, roll-over or other accidents.

⚠ WARNING





When your golf car is at idle with your enclosure installed, make sure to open a side door to ensure proper ventilation against carbon monoxide.

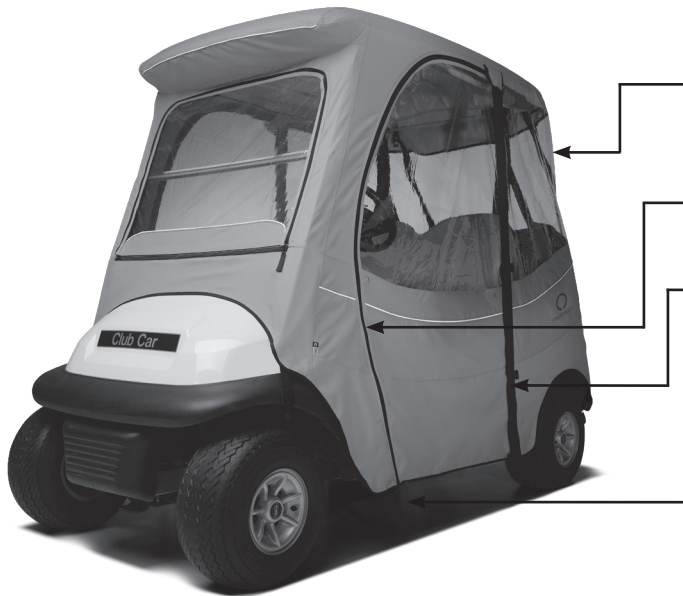

- Rear zippered entry for golf clubs works well with rear canopies
- Each side zips for easy door entry and exit
- Driver and passenger doors can be rolled to the side and held open with straps (doors are shown closed in this photo)
- Hooked straps along each side secure cover to car for a custom fit

Installation

1. Identify the front of your Golf Car enclosure by locating the interior yellow tag which reads "FRONT". Drape the enclosure over the roof of your golf car with the zippered panel at the back.
2. Pull the cover from front to back onto the roof. Make sure the roof edges line up with the seams.
3. Zip the side and rear panels down over the car.
4. Attach the elastic hooked straps along the sides of the golf car. See figure 1.
5. The side doors open with zippers. To keep the doors open fold in half and snap secure. Roll the doors to the back and fasten them with the provided rip-and-grip straps. See figure 2.
6. If your enclosure has removable doors (all but the travel enclosure), hold zipper and door and firmly pull horizontally apart as shown in figure 3.
7. There is a zippered opening in the back so you can easily load and unload your golf clubs. If your enclosure has a zippered rear panel it can be rolled all the way up to the roof and secured with rip-and-grip straps. The Yamaha®, E-Z-GO®, & Club Car Precedent® model specific enclosures can be secured at the halfway point as well.
8. If your enclosure has a removable windshield you can completely unzip the windshield. The Yamaha®, E-Z-GO®, & Club Car Precedent® model specific enclosures have a front hideaway pocket where you can store your windshield when not in use. See figure 4.

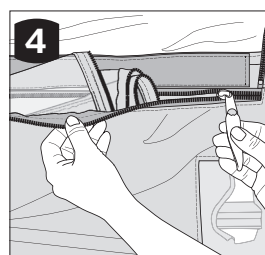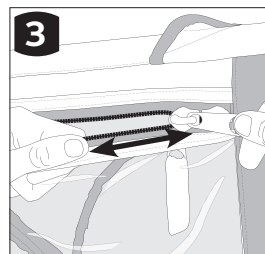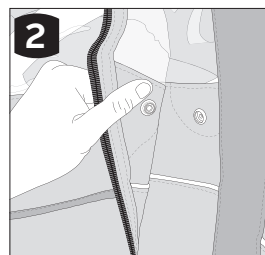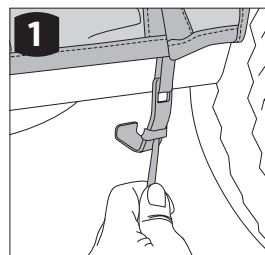

NO TOOLS
REQUIRED



LINE DRY



DO NOT
MACHINE
WASH



MILD SOAP
FOR
WINDOWS
ONLY



DO NOT
PACK WET

Cleaning

Clean your enclosure with a soft brush and lukewarm water. DO NOT USE SOAP as it may remove the protective coatings. Line dry.


Tip: If the clear vinyl windows on your cover are wrinkled from storage you can smooth them out with a hair dryer. Be sure to set the dryer on low and hold it at an appropriate distance.

Tip: Clean clear vinyl windows with mild soap using your hands or a soft cloth to avoid scratching the surface.


Storage

A handy storage bag is provided to store your enclosure in. To avoid mildew, be sure the enclosure is completely dry before you store it in the storage bag.


Repacking Instructions

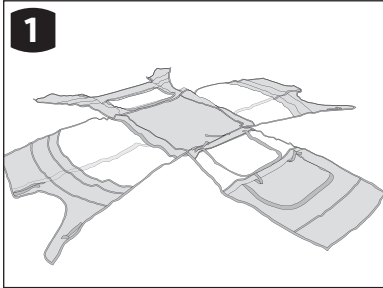


1 Start with enclosure layed out flat

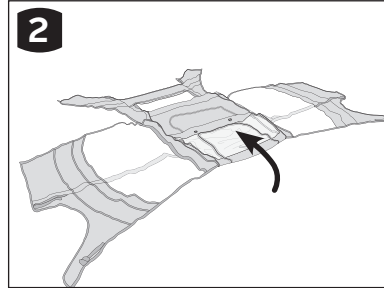


2 Fold rear panel in towards the center

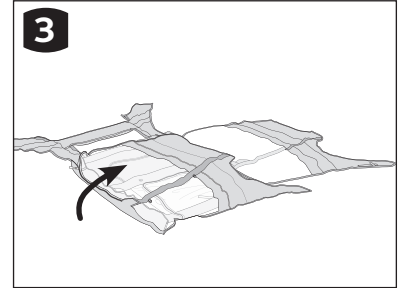


3 Fold one side panel into the center

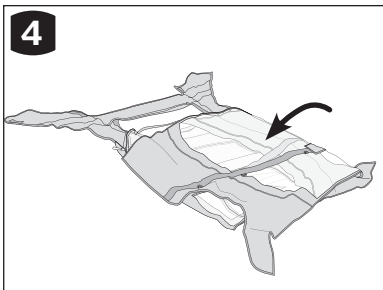


4 Fold the other side panel into the center

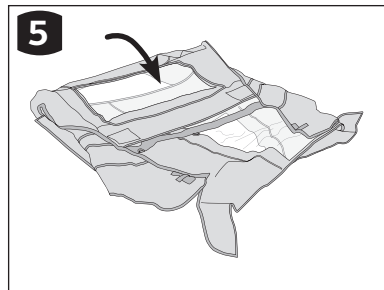


5 Fold the front panel into the center

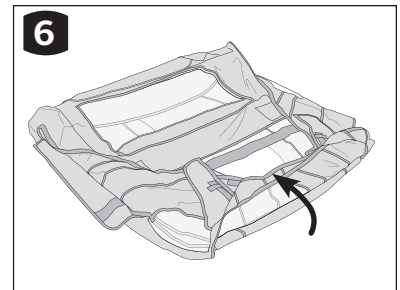


6 Tuck in any loose ends

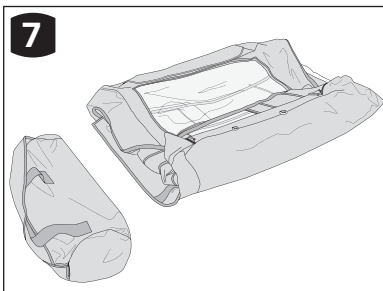


7 Lay bag next to the enclosure

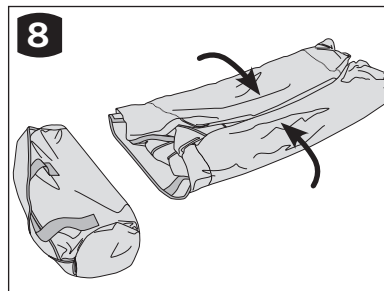


8 Fold the sides into the center to match the length of the bag

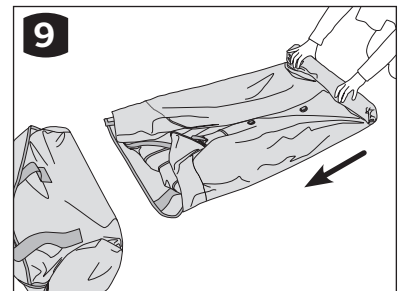


9 Roll the enclosure up as shown above

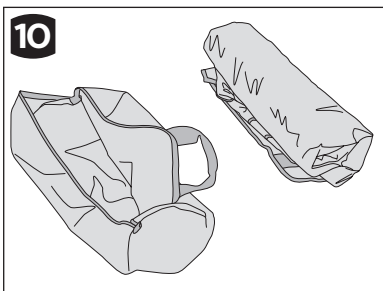

10 Rolled enclosure should match bag length

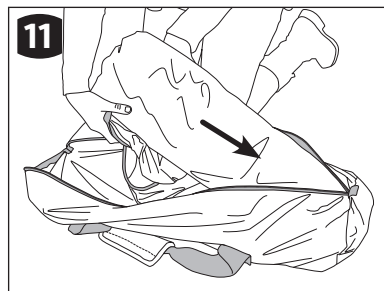

11 Insert enclosure into the bag as shown

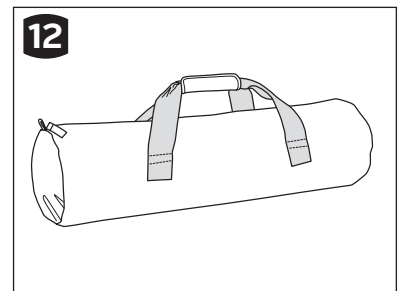

12 Zip the storage bag closed