

Introduction & Features

The RP5-GM32 interface allows the replacement of a factory radio in select General Motors vehicles with 29-bit LAN radios. Using this interface will retain factory features such as OnStar, steering wheel controls (SWC), warning chimes, Rear Seat Controls (RSC) and the BOSE amplifier when the original radio is removed. Use of this interface also allows you to program two radio functions to each SWC button by using short press long press dual command functionality. The RP5-GM32 also provides data bus driven outputs such as retained accessory power (RAP), vehicle speed sensor (VSS), illumination, reverse trigger and parking brake.

Important Notes

1. The radio select rotary switch on the side of the interface must be adjusted to the proper radio setting before plugging the interface into the vehicle (see next page for setting chart).
2. The interface comes pre-programmed for all of the vehicles factory SWC functions and does not require programming unless you wish to re-assign the SWC functions or utilize short press long press dual command functionality. The SWC can always be restored to default settings by following the procedure outlined on page 3.
3. RSC buttons that are identical to the SWC will mimic the SWC one for one.
4. The LED will flash whenever a SWC button is pressed.

Wiring Connection Chart

Aftermarket Radio Connections

Yellow	Battery +12v
Black	Ground
Red	Accessory Output
White	Front L + input
White / Black	Front L - input
Grey	Front R + input
Grey / Black	Front R - input
Green	Rear L + input
Green / Black	Rear L - input
Purple	Rear R + input
Purple / Black	Rear R - input


Red / White	Parking Brake Output (-)
Purple / White	Vehicle Speed Output
Blue / White	Not Used
Blue	Not Used
Orange / White	Illumination Output (+)
Green	Reverse Output (+)
Brown Loop	Mute Loop - See installation note 7

SWC Connector


Blu/Yel	Kenwood, Newer JVC
3.5mm Jack	Alpine, JVC, Clarion, Pioneer, Sony, Fusion, Boyo, Dual, Lightning Audio, Visteon or Advent

Illustration / Schematic

Wiring

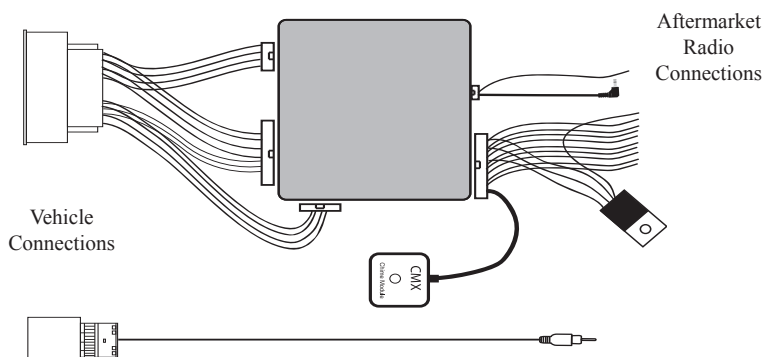

SWC Connection

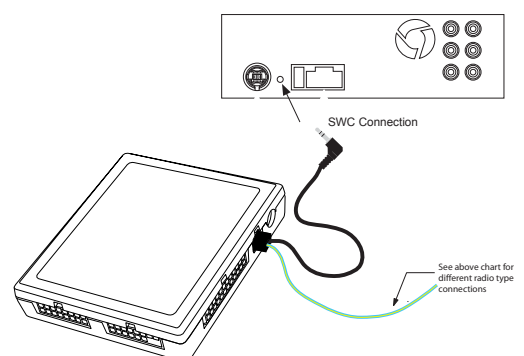

Installation Steps

SET RADIO SELECT SWITCH



Alpine	Clarion	Fusion	JVC	Kenwood	Pioneer/Sony/Other
1	4	9	2	3	7

Other = Advent, BOYO, Dual, Lightning Audio, Visteon,

- The radio select rotary switch on the side of the interface must be adjusted to the proper radio setting before plugging the interface into the vehicle.**
- Make all connections as described in the chart on page 1.
- Factory installed amplifiers will determine the audio output connection. If the vehicle has a factory installed amplifier use the factory amplifier audio location. If a factory installed amplifier is not present use the non-amplified factory audio location.
- If the vehicle is equipped with a Premium BOSE system, connect the subwoofer and center channel RCA inputs to the aftermarket radios. If the aftermarket radio to be installed does not have a dedicated center channel or sub output do not use this cable. To ensure best sound performance channel summing is not recommended. Use this cable according to the outputs that are available.
- If the vehicle is equipped with a reverse camera and the aftermarket radio has a reverse camera input, connect the yellow RCA plug on the gray connector to the aftermarket radios reverse camera input.
- Plug the CMX chime module in if necessary (If the vehicle chimes when the radio is removed the CMX is not necessary). **PLEASE NOTE:** In order to get the best possible sound out of the CMX please mount it in a place free and clear of any obstructions, preferably as close as possible to the bottom of the dash pointing down toward the floor of the vehicle.
- The Mute loop (if not cut) will turn the accessory output off when an OnStar or Bluetooth call is made or received. If the aftermarket radio has a mute input cut this loop and connect the outer brown wire to the mute input.
- Connect the SWC wire according to the chart on page 1 (aftermarket radio MUST support a wired remote input).
- If you wish to reassign functions to the SWC follow the programming instructions in the next section.

Default Steering Wheel Control Programming

IMPORTANT! The interface comes pre-programmed for the functions listed in the chart below and does not require programming unless you wish to re-assign the SWC functions to different buttons. The SWC can always be restored to default settings by following the procedure outlined on page 3.

Default SWC Button Assignments

	Alpine	JVC	Kenwood	Clarion	Sony/Pioneer	Fusion
Volume +	Volume +	Volume +	Volume +	Volume +	Volume +	Volume +
Volume -	Volume -	Volume -	Volume -	Volume -	Volume -	Volume -
Source	Source	Source	Source	Source	Source	Source
Track +	Track +	Track +	Track +	Search +	Track +	Track +
Track -	Track -	Track -	Track -	Search -	Track -	Track -
Voice	Mute	Mute	Mute	Mute	Mute	Mute
Play/Pause	Preset +	Preset/Disc -	Disc/FM+	Band	Preset +	Audio

Optional Steering Wheel Control Programming

If you wish to re-assign the SWC functions, utilize short press long press dual command functionality or select between Factory/Aftermarket mode, the interface must be programmed in the specific order shown in the chart on page 3. If you come across a function in the chart that your steering wheel does not have, or you do not want to program, press and release the program button on the side of the interface to skip that function. The LED will flash off and on confirming that you have successfully skipped that function and are ready to proceed to the next one.

SET RADIO SELECT SWITCH



Alpine	Clarion	Fusion	JVC	Kenwood	Pioneer/Sony/Other
1	4	9	2	3	7

Other = Advent, BOYO, Dual, Lightning Audio, Visteon,

Optional Steering Wheel Control Programming (cont.)

The Mute button can be set to control the factory OnStar functions or given the ability to control the aftermarket radio. This option can be set using the program button on the side of the interface. The default setting for this button is factory mode which controls the factory OnStar. If this button is set to aftermarket mode, OnStar must be accessed by using the factory controls located on the rearview mirror.

Factory Mode

- The SWC Mute button is programmed to control OnStar. It cannot be programmed for short press/long press dual command functionality and is blocked from doing so.

Aftermarket Mode

- OnStar control through the SWC Mute button is disabled. This will free up the Mute button to send mute radio command and another 2nd function.

Use the function chart on the next page as a guide to program the functions in the proper order for your new radio

- Turn the key to the ignition position.
- Press and release the programming button on the side of the interface the number of times that corresponds with either factory or aftermarket mode. One press will set factory mode and two presses will set aftermarket mode. The LED will blink each time the button is pressed.
- Once you have chosen either factory or aftermarket mode, after 2.5 seconds the LED will come on solid. **At this point you have two options:**
 - To restore the SWC to factory default settings:** Simply wait 7 seconds and the LED will blink 3 times indicating the interface has timed out. The default settings are now restored and no further action is required.
 - To program custom SWC assignments:** Proceed to step 4
- With the LED on, press the first button to be learned on the steering wheel, the LED will turn off. **At this point you have two options:**
 - For short press functionality:** Release the button within 1.5 seconds. The LED will turn back on.
 - For long press functionality:** Hold the button until the LED starts blinking. Release the button and the LED will go back to solid.
- If you need to program more buttons, repeat step 3 for each additional audio function on the steering wheel.
- If you come across a function in the chart that your steering wheel does not have, or you do not want to program, press and release the program button on the side of the interface to skip that function.
- Once programming is completed, wait seven seconds. The LED will flash three times indicating end of programming.
- Test the interface for proper functionality. Whenever a SWC is pressed the LED on the interface should blink. If any function does not work, repeat the programming steps

Optional Programming Order

Radio	Alpine	JVC	Kenwood	Clarion	Other*	Sony	Pioneer	Fusion
1	Volume +	Volume +	Volume +	Volume +	Volume +	Volume +	Volume +	Volume +
2	Volume -	Volume -	Volume -	Volume -	Volume -	Volume -	Volume -	Volume -
3	Mute	Mute	Mute	Mute	Mute	Mute	Mute	Mute
4	Preset +	Source	Source	Source	Preset +	Preset +	Preset +	Source
5	Preset -	Track +	Play	Search +	Preset -	Preset -	Preset -	Track +
6	Source	Track -	Track +	Search -	Source	Source	Source	Track -
7	Track +	Band/Disc +	Track -	Band	Track +	Track +	Track +	Audio
8	Track -	Preset/Disc -	Disc/FM +	Send/End	Track -	Track -	Track -	Power
9	Power	Select	Disc/AM -	Send	Band	Band	Band	
10	Enter/Play	Attenuation	Answer	End		Reject Call/Source (Bluetooth equipped radios only)	Phone Menu	
11	Band/Program	Phone Receive	Voice Dial			Skip	Answer Call	
12	Receive	Phone Reject	On Hook			Skip	End Call	
13	End	Voice Dial	Off Hook			Skip	Voice Activation	
14		Power	Mute (Multimedia units only)			Answer/End Call		


*Other = Advent, Boyo, Dual, Lightning Audio, Rockford Fosgate, & Visteon

Testing & Verification

1. Turn the ignition on. The LED on the interface will turn on & the +12v accessory wire will turn on.
2. Turn on the radio & check balance & fade. Note: **Premium Factory amplified Systems** will not fade as neither the aftermarket radio or the RP interface have the ability to control the amplifier's fader.
3. Verify that the factory subwoofer (if present) is playing
4. Verify that all SWC are functioning properly for both the aftermarket radio and OnStar. To adjust OnStar volume, press the OnStar button on the mirror then use the volume buttons on the SWC to adjust the level. The volume will raise a total of 8 times before returning to the original level.
5. Pressing the OnStar® button on the rearview mirror will turn off the rear speakers and allow the OnStar® audio to be heard in the two front speakers. The OnStar® active LED will also turn on. When OnStar® disconnects, the radio will un-mute or turn back on and the OnStar® LED will turn off. Pressing the Mute/OnStar® button on the steering wheel for 1.5 seconds will also activate Onstar®.
6. Turn off vehicle & remove key. RAP will be active & keep the radio on for 10 minutes or until the drivers door is opened.
7. The LED & radio will turn off when RAP turns off or the drivers door is opened.

Using Rear Seat Audio Controls

Using the Radios Dual Zone Source

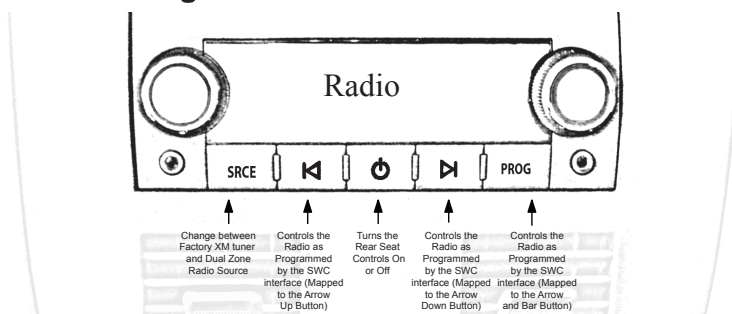

1. Press the power button to turn the RSE Controls on. When Radio is displayed on the RSE Controls, the aftermarket radios rear speaker output will be heard through the headphone jacks. Putting the aftermarket radio into dual zone mode should change the output level of the rear speakers to a fixed level. This allows precise user adjustment from the level knobs on the RSE Controls (refer to aftermarket radio owners manual for model specific dual zone operation).
2. The seek arrows and PROG button will control the radio as programmed by the SWC interface. These buttons are mapped to the SWC buttons as stated above.
3. Pressing the power button will turn the RSE Controls off as well as turning the key off. The seek arrows and PROG button will continue to operate as stated (with the exception of SRCE which has no function) when the Rear Seat Controls are turned off.

Rear Seat Entertainment (RSE); If equipped

1. Vehicles equipped with an overhead screen only:


In this application the **GMRVD2** must be used in order to feed A/V into the factory screen from an aftermarket head unit (head unit must support A/V out). With the **GMRVD2**, A/V will be passed from the aftermarket head unit to the rear screen and audio can be heard through the headphones. The **GMRVD2** will also pass the Auxiliary inputs on the rear of the center console to the aftermarket head unit.

2. Vehicles equipped with an overhead screen AND headrest monitors:

In this application the headrest monitors will function independantly from the overhead monitor. Neither video or audio can be passed to or from the headrest monitors. The overhead monitor will function exactly as described in #1.

OnStar Volume Adjustment for Vehicles w/o SWC

1. If SWC buttons are not present you must use the programming button on the interface to control the OnStar audio level during an OnStar connection.
2. When OnStar is active pressing the programming button will raise the audio level 4 times before returning to the original level.

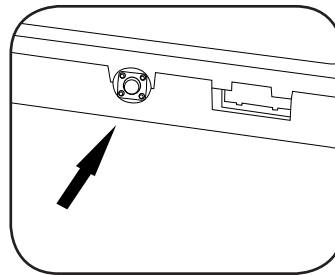

Press the programming button on the side of the interface while OnStar is active to adjust the OnStar volume