



Cargo Cover Installation Instructions

For: Wrangler 1992 - 1995
(with original Factory Hardware)

Part Number: 41815

Note: This product is designed to be installed on vehicles equipped with a Factory Soft Top Only.

WARNING

This product is designed to enhance the appearance of the vehicle and to shield the occupants from ordinary weather conditions. Do not rely in any way on the components of this product to contain occupants within the vehicle, or to protect against injury or death in the event of an accident. This top will not protect the occupants from falling objects. Never operate vehicle in excess of manufacturer's specifications.

WEAR SEAT BELTS AT ALL TIMES

Read and follow, precisely, all installation instructions provided when installing cover. Failure to do so may result in a poor fitting cover and could place occupants of the vehicle in a potentially dangerous situation. After installing or reinstalling the cover, check to make sure it has been properly installed.

Installation Tips

After completing the installation, keep these instructions for future reference. Before you begin installing this Cargo Cover, read all instructions thoroughly. Below are a few tips to make this installation easier.

For a smooth fit:

For ease in installation, this product should be installed at temperatures above 72° F. Below this temperature, the fabric may contract an inch or more, making it difficult to fit to the vehicle.

It is normal for the fabric to contract and wrinkle when stored in the shipping carton. Within a few days after the installation, the fabric will relax and the wrinkles will disappear.

Parts Kit

Cargo Cover


Qty - 1

Step One

Remove your soft top from the hardware. Fold the top and store. Fold the factory hardware system down onto the vehicle body. Make sure the hardware system lies as flat as possible, with the bow assembly resting against the rear sport bar.

Step Two

Fold down or remove the rear seat. From the back of the vehicle, hold the cover with the backing side toward you. Slide the tubing into the channel in the tailgate retainer.


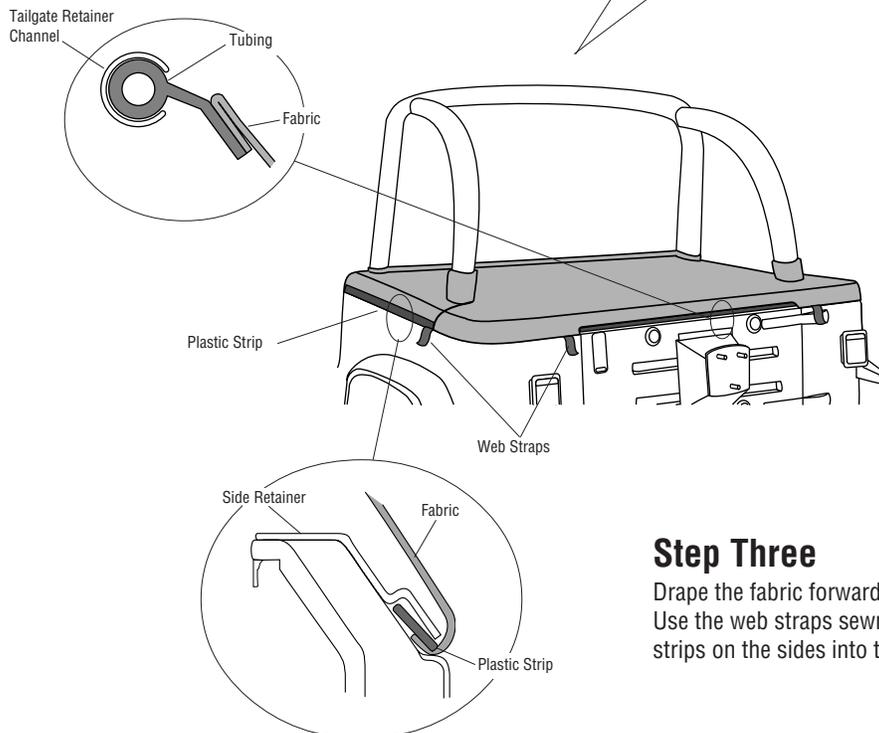


Step Three

Drape the fabric forward over the rear of the vehicle. Use the web straps sewn to the cover, to slide the plastic strips on the sides into the Side Retainers.


Step Four

Locate the web straps with buckles attached on the front of the Cargo Cover. Wrap the straps around the front sport bars and thread the ends through the buckles.

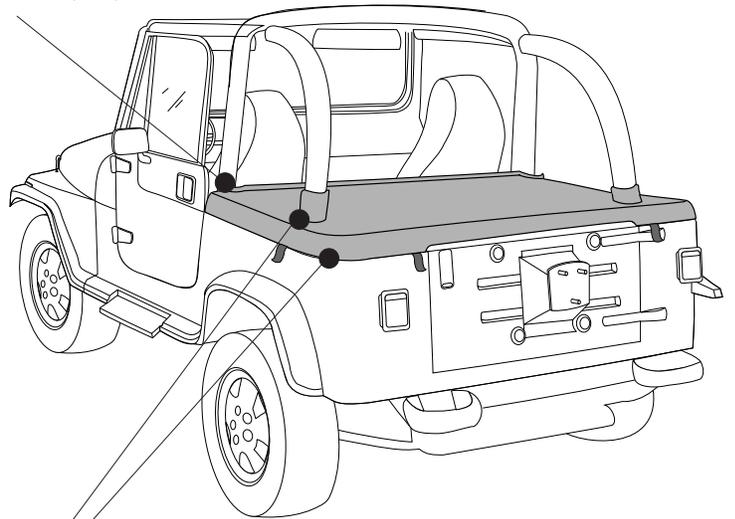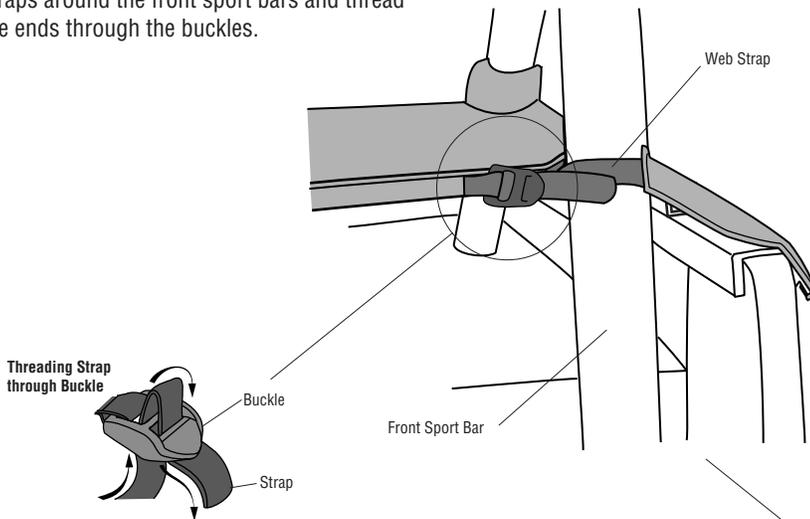

Step Five

Slide the plastic strips, sewn into the rear corners of the cover into the Corner Retainers. Use the web straps sewn to the cover to slide the corner plastic strip toward the front of the vehicle and make sure that the plastic strip fits up into the retainer so that the collar fits properly.

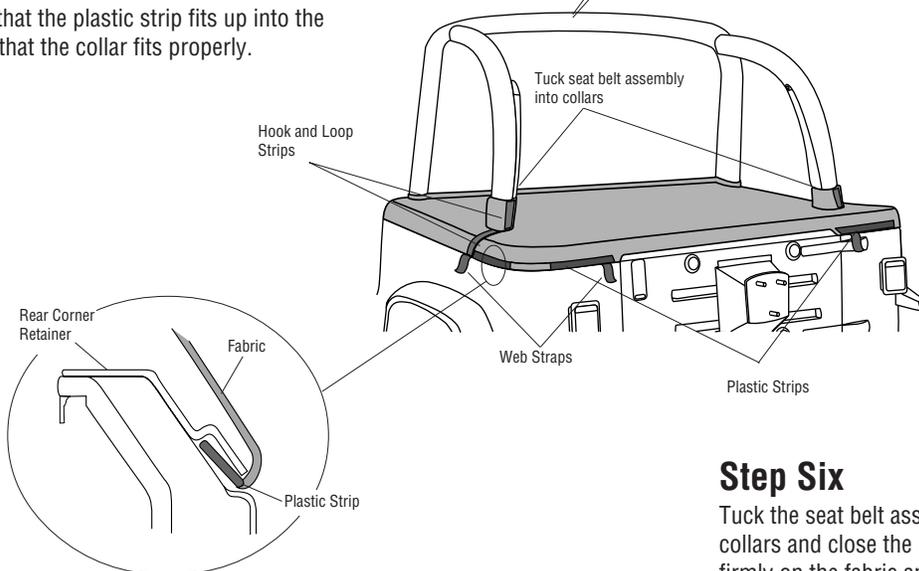

Step Six

Tuck the seat belt assemblies into the rear sport bar collars and close the rear sport bar collars by pulling firmly on the fabric and fastening the Hook and Loop Strips to each other.