



Fitting Instructions APX Style [Roof Rack](#) with Ditch Adapter Bracket


PART No.

59720 - 59721

Carrying Capacity


50 kgs
110 lbs

Parts List

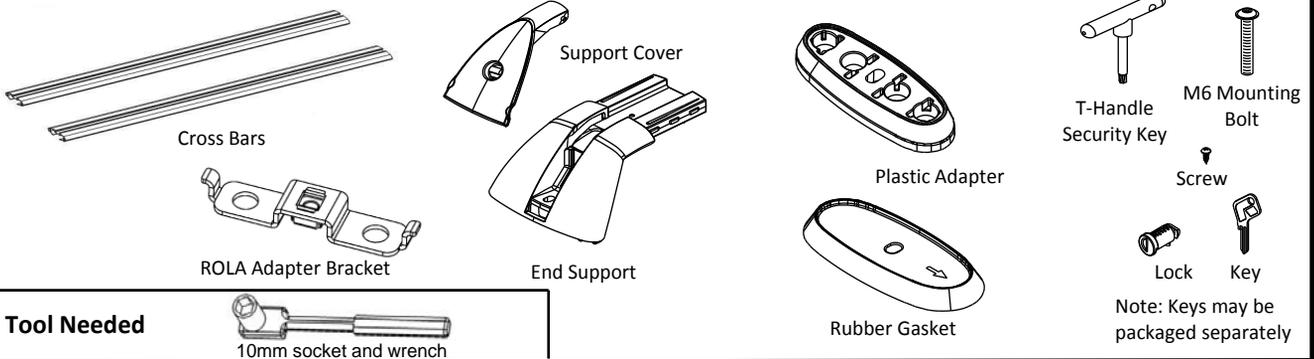

Prior to Assembly, check that your Roof Rack Box contains all the parts as shown above. Ensure that the vehicle roof is clean and dry. Please note that some illustrations depicted in these instructions are only representative and your items may look different. Read these instructions carefully before commencing. You can use a protective cloth when installing your racks to protect of vehicle's finish.


Step 1: Removing the Anchor Point Covers and replacing Automotive Manufacture's Clip Bracket

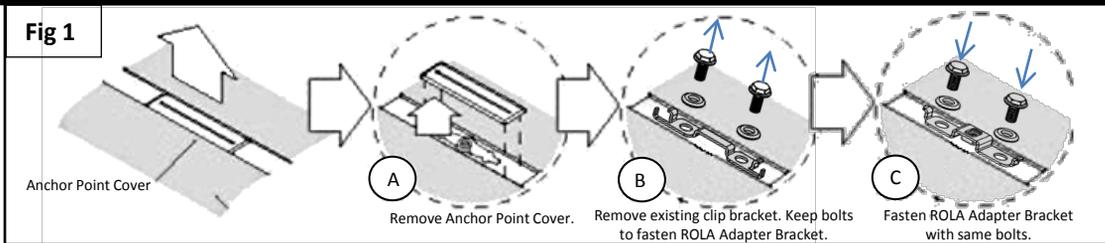

On the vehicle roof you will find 4 Anchor Point Covers. Carefully remove these covers by sliding in the direction shown on the cover, to reveal the clip bracket (Fig 1-A). Using a 10mm socket wrench, replace existing clip bracket with the ROLA Adapter Bracket reusing the bolts that secured the clip bracket, as shown (Fig 1-B & C).

NOTE: Take care when removing Trim Covers to avoid damaging Trim Cover Clips. Covers can not be replaced while rack is mounted. Covers can be replaced over the ROLA supplied Adapter Bracket. Store the Anchor Point Covers and existing brackets safely while the Roof Racks are in use.

To remove or re-attach the End Support Cover. Insert the narrow end of the End Support cover into the top of the End Support (Fig. 2a & 2b). Twist the End Support Cover clockwise to install in End Support.

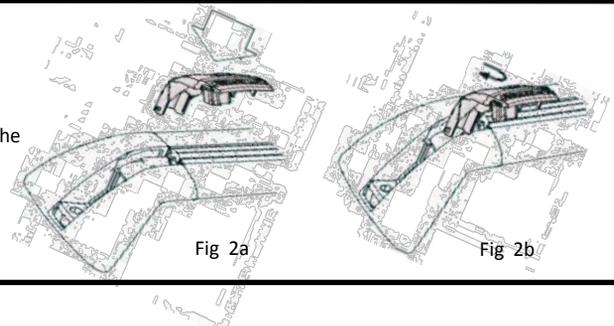

Installing Plastic Adapters and Rubber Gasket Pads

Step A:

Install Rubber Gaskets & Plastic Adapters on vehicle roof. Align the holes in adapters & gaskets with threaded insert anchor points.

Ensure the Rubber Gasket is oriented correctly. Each Rubber Gasket is marked with a directional arrow. Ensure that the center hole in the gasket lines up with the anchor point thread in the roof.

Step B:


Locate the Plastic Adapter onto the Rubber Gasket.

Repeat STEPS A and B with the remaining Adapters.

Ensure the Plastic Adapter is oriented correctly.

Ensure that the center hole in the Plastic Adapter lines up with the anchor point thread in the roof.

When positioned correctly on the vehicle, the arrow shown on the top surface of the Rubber Gasket points toward the front of the vehicle.

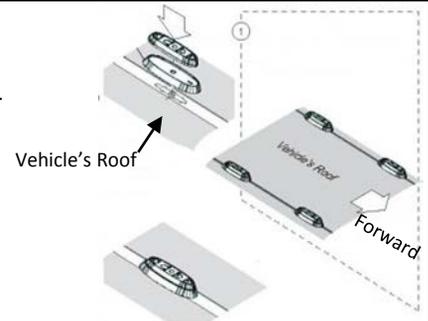

Installation Instructions: APX Style Roof Rack with Ditch Adapter Bracket

Fitting the Cross Bars to the vehicle

Step A:

Each Cross Bar varies in length:

Install the Cross Bar labeled 'Front' on the underside of the Cross Bar to the front Adapter & Gasket pads.

Install the remaining cross bar to the Rear Adapter & Gasket pads.

Refer to Fig. 1a for further guidance.

Step B:

Place the End Supports of one of the Cross Bar Assemblies on the two corresponding Gasket Pad assemblies (Fig. 3a).

Step C: Open the two End Support Covers such that the Anchor Hole is exposed. Loosely fasten both sides in place by inserting the 50mm Bolt into the Anchor Hole, and turning approx. 2-3 turns with the Grey T-Handle Security Key (Fig. 3b).

Step D:


Using the Grey T-Handle Security Key, tighten the Mounting Bolts to approx. 5Nm (44 in/lbs) of torque or a firm hand-tightness. Close the End Support Covers and lock using the Key provided.

Step E:

Repeat STEPS B, C and D for the remaining Cross Bar Assembly

Remove Keys and store in a safe place.


Note: You will have to remove or trim the Buffer Strip to mount accessories.

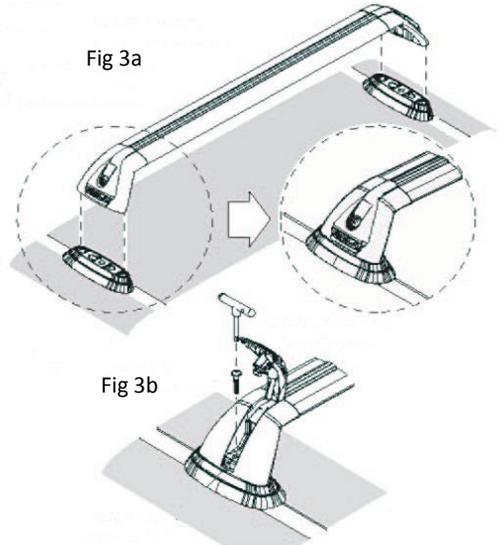

Using the Roof Racks

To load accessories into the Channel of the Cross Bars, unlock the End Support Cover (Fig. 4a). Pull the Cover out and down to fully access the Channel. Once accessories have been loaded, replace the End Support Cover and lock.

Intermittently check that all Screws and Bolts are sufficiently tightened while the Roof Racks are in use.

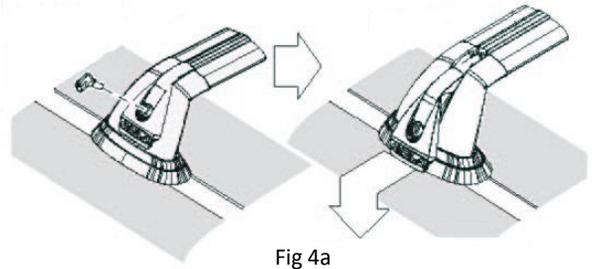


Locking Covers and Mounting Accessories

You are now ready to mount your accessories examples: Bike, Kayak, luggage carriers by using the accessory channel if applicable. "T" bolts are available to mount accessories (Fig 5a)

Be sure to cut your buffer strips to size to completely cover your channel once the accessories are mounted.

Lock all four covers into place using the keys provided. Store your keys in a safe place such as the glove box or key ring. Replacement locks and keys are available as service items.

Ensure all covers are closed hard against the End Supports and locked.



General Usage Information

* It is essential for the proper assembly, operation and use of the Roof Rack that the instructions and safety precautions supplied are strictly observed.

* The maximum permissible load for your roof rack is the lower of the maximum load capacity specified in you owners manual or specified on your roof rack load label. Do NOT exceed the maximum load capacity.

Maximum load capacity equals the weight of the rack + accessories + weight of cargo. Ensure your vehicle's function is not impaired before driving.