

**Rugged  
Ridge**

**OUTLAND  
AUTOMOTIVE**

P/N: 13264.01

13264.04

**Installation instructions**  
**2007-08 Jeep® Wrangler JK - Neoprene Rear Seat Covers**  
**4-Door Rear Seats**

13264.09

13264.53

**Parts included:** (1) Rear (top & bottom) Left Side Seat Cover - Small  
(1) Rear (top & bottom) Right Seat Cover - Large  
(2) Head Rest Covers

**NOTE: Please read instructions before installing**


**Instructions:**

**Step (1)** Release and slightly fold rear seat forward -Driver Side  
For 2008 and newer JK's  
pull nylon seat release located  
on the bottom corner of the  
seat.




**Step(1)**

**Step (2)** Slip upper seat cover over  
seat. Note location of head  
rest slots with Velcro.

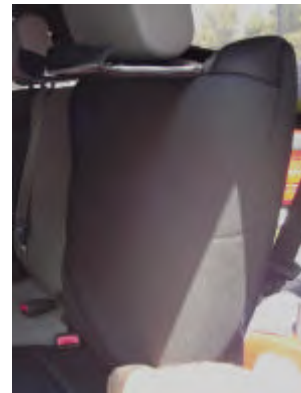


**Step (2)**

**Step (3)** Slip lower Velcro strip  
between the upper and  
lower portions of the seat.  
and secure.

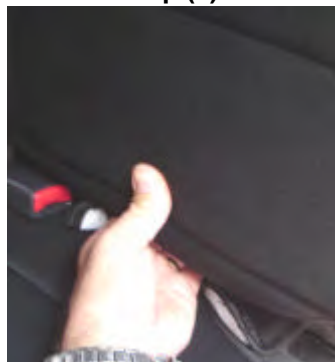

**Step (3)**

**Step (4)** Secure front and rear Velcro  
As shown. Adjust as needed.

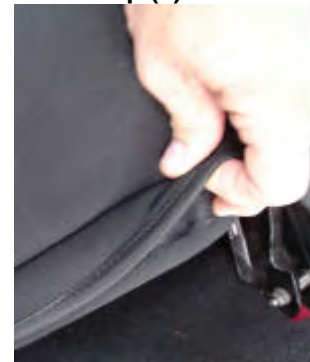

**Step (4)**

**Step (5)** Pull upper Seat sections  
through head rest slots.  
**Note: Tilting head rest  
back will help with install.**  
Secure front & rear Velcro flaps.



**Step (5A)**

**Note:** on 2008 and newer  
models the seat release is  
deleted from the top. Flip the  
supplied flap over the top of the  
seat and stuff under cover (5B)



**Step (5B)**

**Step (6)** Slip smaller lower seat cover  
into bottom of seat. Push  
rear of cover (with clips)  
between top and bottom of  
seat. Folding seat forward  
will ease installation.



**Step (7)** With front of cover pulled over seat run nylon straps and clips under seat. Secure to back clips and pull tight.

**NOTE: DO NOT OVER TIGHTEN**  
**Damage to seat cover may result.**

**Step (8)** Slide side clips between seats and secure to underside of seat.

**Step (9)** Repeat steps 6 - 8 for the right side lower seat.

**Step (10)** Unzip large right side upper cover. Slip around seat as Shown in steps 10A and 10B. Seat belt must be slid through opening before zipping.

**Step (11)** Push lower Velcro flaps between the upper and lower seat and secure together.

**Step (12)** Pull upper Seat sections through head rest slots.  
**Note: Tilting head rest back will help with install.**  
 Secure front & rear Velcro flaps.

**Note:** on 2008 and newer models the seat release is deleted from the top. Flip the supplied flap over the top of the seat and stuff under cover (12B)


**Step (13)** Slide covers over head rest as shown.



Step (6)



Step (7)



Step (8)




Step (10A)



Step (10B)



Step (11)

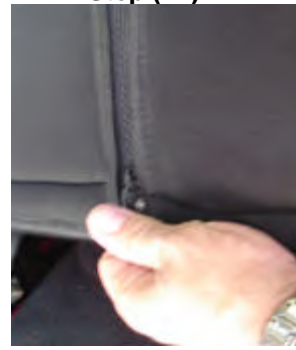

Step (12A)



Step (12B)

