

Installation Instructions G.E.A.R. (Truck) Seat Cover

Part # 56613xx (Universal Fit)

Carefully read the following installation instructions and tips for ease of installation.

Parts Included	Qty
Seat Covers	2


Parts Included	Qty
Separate Pouches	6

Note: Each cover has two sewn-on large storage pouches. There is also six multi-purpose pouches total that gives you plenty of flexibility in placing them on the covers.

STEP 1: Remove headrest from seat if applicable. Release the cord clip and slide it down.(Fig A) This will create slack; next proceed to slide the cover down over your seat.

STEP 2: If your seat does not have any factory parts on it (arm rests, levers, air bags, ect) continue to pull the seat cover down. When you have determined the correct position simply pull the draw strings snug and slide up the plastic cord clip. Installation is now complete. (Fig A) See step 4 for pouch installation.

STEP 3: If your seat is equipped with some kind of factory part slide the plastic cord clip all the way down and remove it. Remove the cord from the webbing loops in the area of the factory part. (Fig B) When you have determined that you have enough room for the factory part slide the cord straight down through the webbing loops until you have cleared the factory part. (Fig C) Once below the part you can start the criss-cross design again until you have reached the bottom of the cover. Re-install your headrest if equipped, (Fig D) Re-install the cord clip, adjust cover to the optimal position and then pull the cord snug and slide the cord clip up. Make sure all seat functions work properly. Installation is now complete. (Fig E,) See step 4 for pouch installation.

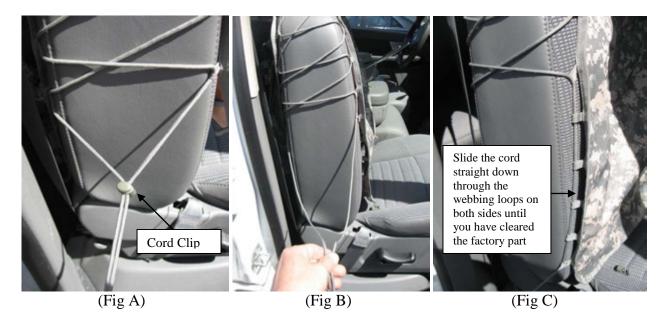



Installation Instructions

G.E.A.R. (Truck) Seat Cover

Part # 56613xx (Universal Fit)







(Fig D) (Fig E) (Fig F)



(Fig G)

STEP 4:

You may now install your pouches. What makes this cover even more versatile is that you may install the pouches wherever you like. After determining the proper place slide the pouch straps through the webbing on the seat cover (Fig F), secure the pouch by fastening the snaps together. Installation is now complete.