

english catalogue

SAFETY SHOES & WORKWEAR




















SPARCO AND SAFETY: AN INDISSOLUBLE COMBINATION

When you think about the concept of safety, the connection to Sparco is almost automatic. For more than forty years Sparco has been the official safety supplier of the most important world teams in the most dangerous sport in the world: MOTORSPORT.

Piquet, Prost, Schumacher, Hakkinen, Alonso, Loeb, Hamilton, Sainz (Sr. and Jr.), Ogier, Ricciardo, Norris - just to name a few - have relied or rely on Sparco to guarantee their safety during racing and to have the best performance in terms of comfort, weight and breathability.

Sparco Teamwork is the collection of shoes and workwear in which safety, lightness and design draw inspiration from the motorsport experience, translating into a work key with the same goal: to guarantee maximum performance.

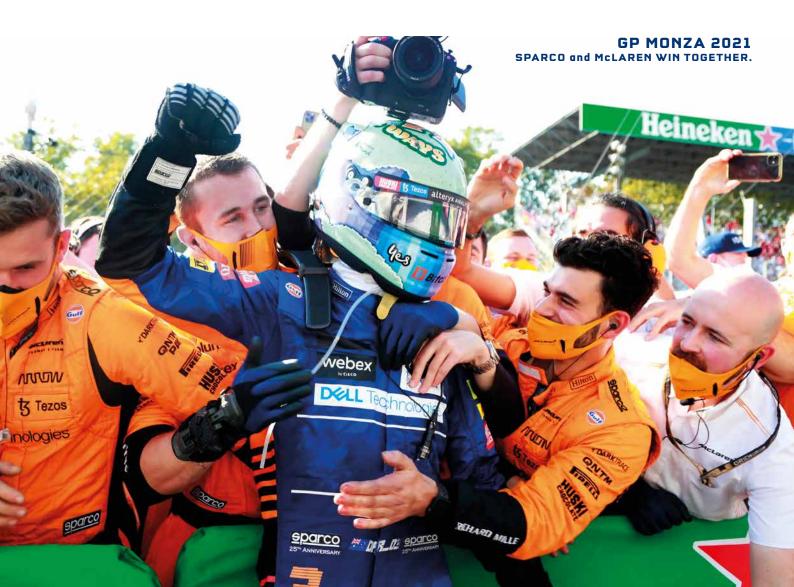

KNOW-HOW SPARCO TEAMWORK

Its attention to detail, care devoted to the choice of sustainable materials and its construction of models totally styled, designed and validated in Italy has allowed SPARCO TEAMWORK to develop safety footwear with new sporty, comfortable and resistant lines in compliance with the ESSENTIAL REQUIREMENTS OF HEALTH AND SAFETY defined by Regulation (EU) 2016/425 on Personal Protective Equipment (PPE) with the (€ mark.

Sparco Teamwork also wants to respond to all those workers who question the social costs demanded by the environment and the situations of exploitation of labour for their production through:

- A conscious and efficient use of environmental resources as common assets;
- The ability to enhance human resources and contribute to the development of the local community in which the company operates;
- Control of the entire supply chain by integrating environmental and energy factors, the safety of materials, biodegradability, recycling and logistics;
- Respect for the fundamental rights of people and workers considering compliance with labour law, protection against child exploitation, guarantees of safety and health in the workplace;
- The enhancement of diversity and inclusion by promoting gender plurality, ethnic, religious and sexual diversity and psycho-physical skills in order to improve people's motivation through training courses dedicated to professional development.

We are convinced that a new SPARCO TEAMWORK brand safety shoe can be born only from new business models and projects that take into account the aforementioned fundamentals.



6

CONTENTS 2022

SAFETY SHOES LINES




























8



WORKWEAR















GLOVES







POP TOOLS





TEAMWORK TECHNOLOGY

SPARCO TEAMWORK shoes are developed using the best technologies in terms of soles and midsoles, in order to optimize the exertion produced in walking by the sole of the foot where the greatest stresses for the user are concentrated, thus returning 70% of the ENERGY produced.

This benefit offers advantages in using SPARCO TEAMWORK footwear, such as:

- less fatigue at the end of the day, thus improving reflexes and attention to the dangers of slipping and tripping injuries
- less exertion in walking
- less strain on the back and spine
- relaxation of the muscles



SRC

Anti-fatigue lug to increase energy absorption.

Laminar engraving

for maximum grip.

Ultralight sole with PHYLON midsole and CROSSGRIP

on particularly uneven surfaces.

rubber tread with lugs that guarantee a strong grip even

Laminar profiles for greater slipping resistance.

SRC

The special design of the MOTIONGRIP sole lugs is conceived to follow all the movements of the foot, guaranteeing ultimate grip.







to increase grip.

Ultralight sole in single-density polyurethane designed for intensive use where the foot bends frequently.

PRISMFLEX



Engraving of closely spaced lugs for maximum grip on oily surfaces.

Engraved crampons for greater arip on stairs.



Sharp-angled lugs for greater grip on oily surfaces.

Ultralight sole with EVA midsole and genuine rubber tread with PRISMA texture that provides strong grip in all foot bending conditions.



Ultralight dual-density polyurethane sole designed to facilitate dynamic use and move safely in all situations.

Ultralight sole with phylon midsole and rubber tread. Ideal for all uses, even for outdoors in leisure time.





GYMKHANA Ling

SNEAKER-STYLE SAFETY FOOTWEAR,

WITH EVA MIDSOLE AND MULTIGRIP RUBBER TREAD, VELOUR MICROFIBRE UPPER AND BREATHABLE MICRO-PERFORATED FABRIC. CONVENIENT FOR ALL USES.

(EN ISO 20345:2011



07527..AZBM

LANDO S1P SRC

METAL

TOE CAP:

in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SOLE:

EVA midsole and nitrile rubber tread with energy absorption on heel. **REMOVABLE INSOLE:**

antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

in velour microfibre and breathable micro-perforated fabric. Additional 2nd color laces included.

> **SIZES:** 36-48 (UK 3 ½ -13)



DANI S1P SRC

TOE CAP: in non-magnetic composite, insulating, resistant to 200J. **ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre. SOLE: EVA midsole and nitrile rubber tread with energy absorption on heel. **REMOVABLE INSOLE:** YAAKHAN/ antistatic in PU with ergonomic thermoforming. LINING: breathable micro-perforated 3D fabric. **UPPER:** in velour microfibre and breathable micro-perforated fabric. Additional 2nd color laces included. SIZES:

36-48 (UK 3 ½ -13)

S



Sculpted lugs for greater slip resistance.

Self-cleaning profiles for the drainage of liquids.

SUPERLIGHT EVA MIDSOLE AND MULTIGRIP RUBBER TREAD.

MAX S1P SRC

SEB S1P SRC

Self-cleaning profiles for the outflow of liquids.

07527..NRGR

TOE CAP:

in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre.

SOLE: EVA midsole and nitrile rubber tread

with energy absorption on heel. **REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

LINING:

breathable micro-perforated 3D fabric.

in velour microfibre and breathable micro-perforated fabric. Additional 2nd color laces included.

> **SIZES:** 36-48 (UK 3 ½ -13)

07527..VSLI





NEW GYMKHANA LİD@ MARTINI RACING

SNEAKER-STYLE SAFETY FOOTWEAR WITH SPECIAL MARTINI RACING LIVERY, EVA MIDSOLE AND MULTIGRIP RUBBER TREAD, VELOUR MICROFIBRE UPPER AND BREATHABLE MICRO-PERFORATED FABRIC. CONVENIENT FOR ALL USES.

GYMKHANA

0





(EN ISO 20345:2011

MARTINI S1P SRC

METAL

07527MR..BM

TOE CAP: in non-magnetic composite, insulating, resistant to 200J. **ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre. SOLE: EVA midsole and nitrile rubber tread with energy absorption on heel. **REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming. LINING: breathable micro-perforated 3D fabric. **UPPER:** in velour microfibre and breathable micro-perforated fabric. Additional 2nd color laces included. SIZES:

36-48 (UK 3 ½-13)

SPECIFICATIONS:

002020MR..

Original replica suit of the iconic Sparco - Martini Racing Mechanic suit.

MATERIAL: 85% polyester

15% cotton SIZES: S-XXL



9

PRACTICE Ling

RUNNING-STYLE SAFETY FOOTWEAR WITH BREATHABLE MICRO-PERFORATED 3D FABRIC AND SCRATCH-RESISTANT MICROFIBRE. IDEAL FOR INDOOR USE.

EN ISO 20345:2011

07517..NRGF

TOE CAP:

in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SOLE:

single-density PU with energy absorption on the heel.

REMOVABLE INSOLE: antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

UPPER:

breathable micro-perforated fabric and scratch-resistant microfibre with high abrasion resistance.

SIZES: 36-48 (UK 3 ½ -13)

07517..NRNR

NIGEL S1P SRC

JOS S1P SRC


TOE CAP: in non-magnetic composite, insulating, resistant to 200J. ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SolE: single-density PU with energy absorption on the heel. REMOVABLE INSOLE: antistatic in PU with ergonomic thermoforming. LINING:

breathable micro-perforated 3D fabric. UPPER: breathable micro-perforated fabric

and scratch-resistant microfibre with high abrasion resistance.

SIZES: 36-48 (UK 3 ½ -13)





Profiles engraved for a better grip on the stairs.

Laminar profiles for greater slipping resistance.

Laminar profiles to increase grip.

ULTRA-FLEXIBLE SINGLE-DENSITY PU THAT INCREASES COMFORT AND REDUCES STRESS TO THE LOWER LIMBS AND THE SPINE.

JACQUES S1P SRC

JODY S1P SRC

07517..NRRS



07517..NRFU

07517.



SIZES: 36-43 (UK 3 ½ - 9)

KEKE S1P SRC

07517..NRVF

TOE CAP:

in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre.

SOLE: single-density PU with energy absorption on the heel.

REMOVABLE INSOLE: antistatic in PU with ergonomic thermoforming.

LINING:

breathable micro-perforated 3D fabric.

breathable micro-perforated fabric and scratch-resistant microfibre with high abrasion resistance.

> **SIZES:** 36-48 (UK 3 ½ -13)



07517..NRAZ

TOE CAP:

in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre.

SOLE: single-density PU with energy absorption on the heel.

REMOVABLE INSOLE: antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

UPPER:

breathable micro-perforated fabric and scratch-resistant microfibre with high abrasion resistance.

SIZES: 36-48 (UK 3 ½ -13)

07517..AZAF

NIKI S1P SRC

The CAP: in non-magnetic composite, insulating, resistant to 200J. ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SOLE: single-density PU with energy absorption on the heed. REMOVABLE INSOLE: antistatic in PU with ergonomic thermoforming. LINING: breathable micro-perforated 3D fabric. UPPER: breathable micro-perforated fabric and scratch-resistant microfibre with high abrasion resistance.

> SIZES: 36-48 (UK 3 ½ -13)

20

NELSON S1P SRC

PRACTICE LING



NITRO Line

RUNNING-STYLE SAFETY FOOTWEAR IN WATER-REPELLENT MICROFIBRE AND SUEDE, IDEAL FOR BOTH INDOOR AND OUTDOOR USE.

Laminar profiles to increase grip. NITRO

ofiles Laminar profiles for greater grip. slipping resistance. Profiles engraved for a better grip on the stairs.

SOCI

ULTRA-FLEXIBLE SINGLE-DENSITY PU THAT INCREASES COMFORT AND REDUCES STRESS TO THE LOWER LIMBS AND THE SPINE. 

22

NITRO LING

<u>9</u>°

07522..NRAZ

PETTER S3 SRC

DIDIER S3 SRC

TOE CAP: in non-magnetic composite, insulating, resistant to 200J. **ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre. SOLE: single-density PU with energy absorption on the heel.

REMOVABLE INSOLE: antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric. **UPPER:** in high-quality water-repellent microfibre. SIZES:

36-48 (UK 3 ½-13)

07522..NRGR

TOE CAP: in non-magnetic composite, insulating, resistant to 200J. **ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre. SOLE: single-density PU with energy absorption on the heel.

> **REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric. **UPPER:** in high-quality water-repellent microfibre.

SIZES: 36-48 (UK 3 1/2 -13)

07522...RSNR

TOE CAP:

in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SOLE:

single-density PU with energy absorption on the heel. **REMOVABLE INSOLE:**

antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

UPPER: in high-quality water-repellent microfibre and suede.

> SIZES: 36-48 (UK 3 1/2 -13)







MARCUS S3 SRC

07522..NRVF

OTT S3 SRC

TOE CAP:

in non-magnetic composite, insulating, resistant to 200J. ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre. SOLE: single-density PU with energy

absorption on the heel. **REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric. UPPER: in high-quality water-repellent microfibre. SIZES:

36-48 (UK 3 ½ -13)



07522..BIBI

TOE CAP:

in non-magnetic composite, insulating, resistant to 200J. ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre.

SOLE: single-density PU with energy absorption on the heel.

REMOVABLE INSOLE: antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric. UPPER:

in high-quality water-repellent microfibre.

36-48 (UK 3 ½ -13)

07522..NRNR

MIKKO S3 SRC

HANNU S3 SRC

TOE CAP: in non-magnetic composite, insulating, resistant to 200J. ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre.

single-density PU with energy absorption on the heel.

> **REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

UPPER: in high-quality water-repellent microfibre. SIZES:

36-48 (UK 3 ½ -13)





CUP Line

26

<u>9</u>°

SAFETY FOOTWEAR IN BREATHABLE JACQUARD FABRIC AND REINFORCEMENT IN PU FILM COATED ON THE TOE, IDEAL FOR INDOOR USE.


O Byoth

<u>sparco</u>

CUD

Engraving of closely spaced lugs for maximum grip on oily surfaces.

Sharp-angled lugs for greater grip on oily surfaces.



Engraved crampons for greater grip on stairs.

ULTRALIGHT EVA MIDSOLE AND NITRILE RUBBER TREAD WITH ENERGY ABSORPTION ON THE HEEL.

ĥ





RICARD S1P SRC

07526..NRAZ

TOE CAP:

in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre.

SOLE: EVA midsole and nitrile rubber tread with energy absorption on heel.

REMOVABLE INSOLE: antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric. **UPPER:**

Ultra-breathable jacquard weave with PU film reinforcement coating on the toe.

> SIZES: 35-46 (UK 2 ½ - 11 ½)

07526..NRVF

TOE CAP:

in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SOLE:

EVA midsole and nitrile rubber tread with energy absorption on heel.

> **REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

> > LINING:

breathable micro-perforated 3D fabric. **UPPER:**

Ultra-breathable jacquard weave with PU film reinforcement coating on the toe.

SIZES: 35-46 (UK 2 ½ - 11 ½)

07526..NRRS

TOE CAP: in non-magnetic composite, insulating, resistant to 200J. **ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre. SOLE:

EVA midsole and nitrile rubber tread with energy absorption on heel.

REMOVABLE INSOLE: antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

UPPER:

CUP Ling

Ultra-breathable jacquard weave with PU film reinforcement coating on the toe.

SIZES: 35-46 (UK 2 ½ - 11 ½)

ADELAIDE S1P SRC



span









spar



METAL

SPORT EVO Line RACING EVO Line

SAFETY FOOTWEAR COMING FROM THE WORLD OF RACING IN HIGH-QUALITY SMOOTH AND SUEDE OR NUBUCK LEATHER, ELEGANT, COMFORTABLE AND HARD-WEARING, IDEAL FOR OUTDOOR USE.

(EN ISO 20345:2011



SPA ESD S3 SRC



07516..NRGR

TOE CAP: in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SOLE:

dual-density PU with energy absorption on the heel.

REMOVABLE INSOLE: Antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

UPPER: in high-quality nubuck leather with scratch-resistant microfibre heel insert.

> **SIZES:** 38-48 (UK 5 - 13)



LOSAIL S3 SRC

TOE CAP: in non-magnetic composite, insulating, resistant to 200J. ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SOLE: dual-density PU with energy absorption on the heel. REMOVABLE INSOLE: Antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

UPPER: in high-quality water-repellent suede leather with scratch-resistant microfibre heel insert.

SIZES: 38-48 (UK 5 - 13)



<u>9</u>°



Laminar profiles to increase grip. Self-cleaning lugs to improve sliding. Sparco*

SPORTS SOLE COMING FROM THE MOTORSPORT WORLD WITH EXCELLENT TECHNICAL AND NON-SLIP PROPERTIES PROVIDED BY THE LUGS DESIGNED FOR GREATER DIAGONAL AND LONGITUDINAL GRIP. THE TREAD ASSISTS BENDING WHILE WALKING AND PREVENTS PROBLEMS TO THE LOWER LIMBS AND THE SPINE.



RONNIE ESD S3 SRC

CLAY S3 SRC

07515..NRVF



SIZES: 38-48 (UK 5 - 13)

07515..NRNR



07516..RSNR

DONINGTON S3 SRC

BRUCE S3 SRC

METAL

TOE CAP:

in non-magnetic composite, insulating, resistant to 200J. ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre.

SOLE: dual-density PU with energy absorption on the heel.

REMOVABLE INSOLE: Antistatic in PU with ergonomic thermoforming.

LINING:

breathable micro-perforated 3D fabric.

UPPER

In high-quality nubuck leather and water-repellent suede leather inserts with scratch-resistant microfibre heel insert.

SIZES: 38-48 (UK 5 - 13)

07515..RSNR

TOE CAP:

in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre.

SOLE: dual-density PU with energy absorption on the heel.

REMOVABLE INSOLE: antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

UPPER:

in high-quality smooth leather, nubuck leather and water-repellent suede leather, tongue in soft nylon and inserts in scratch-resistant microfibre.

> **SIZES:** 38-48 (UK 5 - 13)

07515..AZAZ

GILLES ESD S3 SRC

TOE CAP: in non-magnetic composite, insulating, resistant to 200J. ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SOLE: dual-density PU with energy absorption on the heel. REMOVABLE INSOLE:

antistatic in PU with ergonomic thermoforming. LINING:

breathable micro-perforated 3D fabric.

UPPER: In high-quality water-repellent suede leather, soft nylon tongue

SIZES: 38-48 (UK 5 - 13)



Line

SNEAKER-STYLE SAFETY FOOTWEAR, COMFORTABLE AND SUITABLE FOR PROLONGED **USE IN A PROFESSIONAL** AND URBAN ENVIRONMENT.



(EN ISO 20345:2011

07518..BMAZ

TOE CAP:

in non-magnetic composite, insulating, resistant to 200J. **ANTI-PERFORATION INSOLE:**

made from zero-perforation textile fibre. SOLE:

dual-density PU with energy absorption on the heel.

REMOVABLE INSOLE: antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

UPPER: in nylon with reinforcements in high-quality water-repellent suede leather.

> SIZES: 38-48 (UK 5 - 13)



MODENA S3 SRC

TOE CAP: in non-magnetic composite, insulating, resistant to 200J. ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SOLE: dual-density PU with energy absorption on the heel. **REMOVABLE INSOLE:**

antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric. **UPPER:**

in nylon with reinforcements in high-quality water-repellent suede leather.

> SIZES: 38-48 (UK 5 - 13)

METAL





S

MAGIONE ESD S3 SRC



FOR GREATER DIAGONAL AND LONGITUDINAL GRIP. THE TREAD ASSISTS BENDING WHILE WALKING AND PREVENTS PROBLEMS TO THE LOWER LIMBS AND THE SPINE.

SARNO S1P SRC

LONATO S1P SRC



07518..BMGR

TOE CAP:

in non-magnetic composite, insulating, resistant to 200J. **ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre. SOLE:

dual-density PU with energy absorption on the heel. **REMOVABLE INSOLE:**

antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

UPPER: in nylon with reinforcements in high-quality suede leather.

> SIZES: 38-48 (UK 5 - 13)

07518..NRNR



38-48 (UK 5 - 13)

JRBAN EVO LING

LEGEND Line

S

ULTRALIGHT SAFETY FOOTWEAR WITH SOCK UPPER, IN BREATHABLE MICRO-PERFORATED 3D FABRIC WITH HF PROCESSING AND WATER-REPELLENT FILM COATING, MICRO-INJECTED REINFORCEMENTS AND GENUINE CARBON FIBRE TOE CAP. IDEAL FOR BOTH INDOOR AND OUTDOOR USE.

<u>eparco</u>

(EN ISO 20345:2011

07525..NRRS

10,5

MONDOPOINT

TOE CAP: in carbon fibre, non-magnetic, insulating, resistant to 200J. ANTI-PERFORATION INSOLE:

> made from zero-perforation textile fibre. SOLE: dual-density polyurethane with energy absorption on the heel.

REMOVABLE INSOLE: antistatic in PU with ergonomic thermoforming.

> LINING: in breathable sock knit. UPPER:

sock type in breathable micro-perforated 3D fabric, high-frequency processing and water-repellent film coating, micro-injected inserts.

> **SIZES:** 38-48 (UK 5 - 13)

SPLITTER ESD S3 SRC



Laminar profiles to increase grip. Laminar profiles for greater slipping resistance.

Profiles engraved for enhanced grip on stairs.

DOUBLE DENSITY PU WITH ENERGY ABSORPTION IN THE HEEL

SPOILER ESD S3 SRC

MOTIONGSIP



07525..NRGR



SIZES: 38-48 (UK 5 - 13)

FLAP ESD S1P SRC

07525..BMAF

TOE CAP:

in carbon fibre, non-magnetic, insulating, resistant to 200J. ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre.

dual-density polyurethane with energy absorption on the heel.

REMOVABLE INSOLE: antistatic in PU with ergonomic thermoforming.

> LINING: in breathable sock knit.

UPPER:

sock type in breathable micro-perforated 3D fabric, high-frequency processing and micro-injected inserts.

> **SIZES:** 38-48 (UK 5 - 13)



07525..NRAZ

TOE CAP:

in carbon fibre, non-magnetic, insulating, resistant to 200J. ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre.

SOLE:

dual-density polyurethane with energy absorption on the heel.

REMOVABLE INSOLE: antistatic in PU with ergonomic thermoforming.

LINING: in breathable sock knit.


UPPER:

sock type in breathable micro-perforated 3D fabric, high-frequency processing and micro-injected inserts.

SIZES: 38-48 (UK 5 - 13)

07525..NRVF

HALO ESD S1P SRC



dual-density polyurethane with energy absorption on the heel.

REMOVABLE INSOLE: antistatic in PU with ergonomic thermoforming.

LINING: in breathable sock knit. UPPER:

sock type in breathable micro-perforated 3D fabric, high-frequency processing and micro-injected inserts.

> **SIZES:** 38-48 (UK 5 - 13)



36

WING ESD S1P SRC



ALLROAD Line

SAFETY FOOTWEAR IN NYLON AND WATER-REPELLENT MICROFIBRE. PHYLON SOLE WITH CROSSGRIP RUBBER BOTTOM. LIGHT, DURABLE AND SUITABLE FOR ALL TYPES OF USE (OUTDOOR AND INDOOR).



BAKU S3 SRC

07528..NRVF

11

MONDOPOINT

TOE CAP: in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SOLE: phylon + nitrile rubber with energy

absorption on the heel. **REMOVABLE INSOLE:** antistatic in PU with ergonomic

thermoforming. LINING: breathable micro-perforated 3D fabric. UPPER:

in nylon and water-repellent microfibre.

SIZES: 38-48 (UK 5 - 13)



S



ULTRALIGHT SOLE WITH PHYLON* MIDSOLE AND CROSSGRIP RUBBER TREAD. IT FEATURES AN IDEAL SCULPTURE FOR MAXIMUM GRIP AND STABILISATION ON GRAVELLY, MUDDY AND SNOW-COVERED SURFACES. LIGHT AND COMFORTABLE, IT ABSORBS VIBRATIONS AND PREVENTS DAMAGE TO THE LOWER LIMBS AND THE SPINE.

* Phylon is a light and resistant plastic made with EVA foam obtained by injection of compressed air.



SOCHI S3 SRC

07528..BMGF

TOE CAP: in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SOLE: phylon + nitrile rubber with energy absorption on the heel.

> **REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric. UPPER: in nylon and water-repellent microfibre. SIZES:

38-48 (UK 5 - 13)



07528..NRNR

TOE CAP:

in non-magnetic composite, insulating, resistant to 200J. ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre.

SOLE: phylon + nitrile rubber with energy absorption on the heel.

REMOVABLE INSOLE: antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric. UPPER:

in nylon and water-repellent microfibre.
SIZES:

38-48 (UK 5 - 13)





07529..NRNR

OKAYAMA S3 SRC

TOE CAP: in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SOLE:

phylon + nitrile rubber with energy absorption on the heel. **REMOVABLE INSOLE:**

antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

UPPER: in nylon and water-repellent microfibre.

SIZES: 38-48 (UK 5 - 13)





CHALLENGE Ling

SAFETY FOOTWEAR IN NYLON AND SUEDE. Durable and suitable for all types of use (outdoor and indoor).

Anti-fatigue cell to increase energy absorption.

Self-cleaning lugs.

sparco

SOLE IN DUAL-DENSITY POLYURETHANE WITH ENERGY ABSORPTION ON THE HEEL.

Profiles engraved for enhanced grip on stairs.





42

CHALLENGE LING

07519...NRNR

TOE CAP: in non-magnetic composite, insulating, resistant to 200J. **ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre. SOLE:

> dual-density polyurethane with energy absorption on the heel. **REMOVABLE INSOLE:**

antistatic in PU LINING:

breathable micro-perforated 3D fabric. **UPPER:** in fine suede with high abrasion resistance. SIZES:

36-48 (UK 3 ½-13)

07519..NRRS

TOE CAP:

SOLE: dual-density polyurethane

REMOVABLE INSOLE:

LINING:

UPPER: SIZES:

07524..NRNR

in water penetration-resistant nylon and suede.

SIZES: 36-48 (UK 3 1/2 -13) CHALLENGE Ling











METAL

ARCTIC Line

SAFETY ANKLE BOOTS WITH SPECIAL

sparco

DRY RESPIRATION SYSTEM (DRS) WATER-RESISTANT MEMBRANE, IN HIGH-QUALITY WATER-REPELLENT MICROFIBRE AND MICRO-INJECTED INSERTS. HARD-WEARING AND BREATHABLE, IT IS IDEAL IN PARTICULARLY DAMP OR WET ENVIRONMENTS.

Profiles engraved for enhanced grip on stairs.

Self-cleaning lugs.

Anti-fatigue cell to increase energy absorption.

SOLE IN DUAL-DENSITY **POLYURETHANE WITH ENERGY** ABSORPTION ON THE HEEL.





ARCTIC S3 WR SRC

07533..NRAZ

TOE CAP:

fibreglass, non-magnetic, insulating, resistant to 200J. **ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre. **SOLE:**

dual-density polyurethane with energy absorption on the heel.

REMOVABLE INSOLE: antistatic in PU.

LINING:

breathable micro-perforated 3D fabric.

in high-quality water-repellent microfibre, micro-injected inserts and special DRS WATER-RESISTANT membrane.

> **SIZES:** 36-47 (UK 3 ½ -12)

Footwear designed for all those who are forced to work in environments characterised by a high presence of water. WR footwear is in fact made with materials and techniques that prevent the entry of water while guaranteeing excellent breathability and therefore perfect hygrothermal comfort.

WALK TEST

METAL


(according to EN ISO 20345:2011)

1,000 steps (about 20 min.) in a tank containing 3 cm of water, the wet internal surface must be ≤ 3 cm2.



DRS MEMBRANE BY SPARCO TEAMWORK (DRY RESPIRATION SYSTEM):

The special DRS membrane by SPARCO TEAMWORK ensures maximum breathability and comfort while preventing water from penetrating into the upper, leaving the feet always dry and protected.

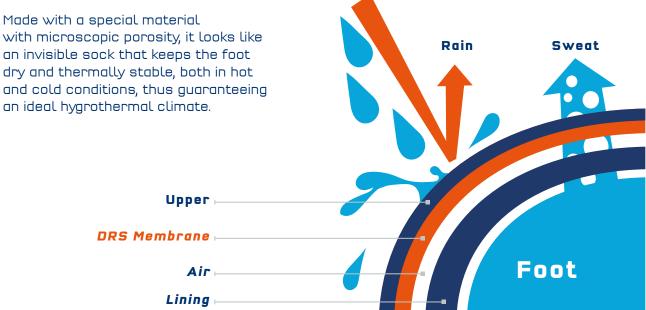

TORQUE Line

TORO

S

ULTRALIGHT, FLEXIBLE AND BREATHABLE OCCUPATIONAL FOOTWEAR. DESIGNED FOR WORK WHERE THE RISK ANALYSIS REQUIRES NEITHER A PROTECTIVE TOE NOR AN ANTI-PERFORATION PLATE, TO GIVE THE USER MAXIMUM COMFORT IN COMPLIANCE WITH THE SAFETY AND HEALTH REQUIREMENTS OF THE EN ISO 20347:2012 STANDARD - (€ MARKING.



IO,5

PALMA 01 SRA



001289..NRNR

SOLE:

phylon midsole and nitrile rubber tread. **INSOLE:**

breathable in memory foam. LINING:

breathable micro-perforated 3D fabric.

with breathable micro-perforated fabric, micro-injected reinforcement on ultra-abrasion-resistant toe.

> **SIZES:** 37-47 (UK 4 ½ - 12)



* Phylon is a light and resistant plastic made with EVA foam obtained by injection of compressed air.

DURANGO O1 SRA

<image>

001289..NRAZ

SOLE:

phylon midsole and nitrile rubber tread. **INSOLE:** breathable in memory foam. **LINING:** breathable micro-perforated 3D fabric.

UPPER:

with breathable micro-perforated fabric, micro-injected reinforcement on ultra-abrasion-resistant toe.

SIZES: 37-47 (UK 4 ½ - 12) **FORQUE** LING

CHARADE 01 SRA

001289..BMAF

SOLE:

phylon midsole and nitrile rubber tread. **INSOLE:**

breathable in memory foam.


LINING: breathable micro-perforated 3D fabric. UPPER:

with breathable micro-perforated fabric, micro-injected reinforcement on ultra-abrasion-resistant toe.

SIZES: 37-47 (UK 4 ½ - 12)



ALGARVE 01 SRA

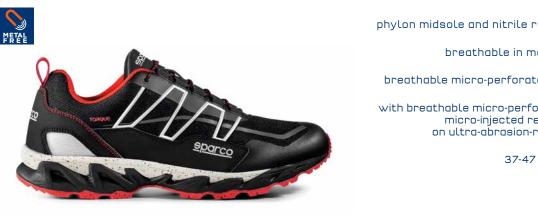

001289..NRRS

SOLE:

phylon midsole and nitrile rubber tread. **INSOLE:**

breathable in memory foam. LINING:

breathable micro-perforated 3D fabric. **UPPER:**

with breathable micro-perforated fabric, micro-injected reinforcement on ultra-abrasion-resistant toe. SIZES:

37-47 (UK 4 ½ - 12)

BOAVISTA O1 SRA



001289..NRGF

SOLE:

phylon midsole and nitrile rubber tread. **INSOLE:**

breathable in memory foam. LINING:

breathable micro-perforated 3D fabric. **UPPER:**

with breathable micro-perforated fabric, micro-injected reinforcement on ultra-abrasion-resistant toe.

> SIZES: 37-47 (UK 4 ½ - 12)



NEW TORQUE LİN@ MARTINI RACING

ULTRALIGHT, FLEXIBLE AND BREATHABLE OCCUPATIONAL FOOTWEAR IN MARTINI RACING LIVERY. DESIGNED FOR WORK WHERE THE RISK ANALYSIS REQUIRES NEITHER A PROTECTIVE TOE NOR AN ANTI-PERFORATION PLATE, TO GIVE THE USER MAXIMUM COMFORT IN COMPLIANCE WITH THE SAFETY AND HEALTH REQUIREMENTS OF THE EN ISO 20347:2012 STANDARD - (€ MARKING.

> Self-cleaning profiles to increase flexibility.

Perco

L Laminar profiles to increase grip.

Laminar engraving for greater slipping resistance.

ULTRALIGHT SOLE WITH PHYLON* MIDSOLE AND RUBBER TREAD.

Phylon is a light and resistant plastic made with EVA foam obtained by injection of compressed air.



TWISTTECH

<u>**9**</u>

01289MR..BM

SOLE: phylon midsole and nitrile rubber tread.

INSOLE: breathable in memory foam. LINING: breathable micro-perforated 3D fabric. **UPPER:** with breathable micro-perforated fabric,

micro-injected reinforcement on ultra-abrasion-resistant toe. SIZES:

37-47 (UK 4 ½ - 12)

001144MR..

REPLICA HOODIE MARTINI RACING

SPECIFICATIONS:

MIKI O1 SRA

Hooded sweatshirt made with an ultra-soft cotton blend featuring the iconic Martini Racing livery. The logo patches and stripes are fully embroidered.

MATERIAL:

65% cotton - 35% polyester 300 gr. m2 - hood lined in soft jersey SIZES: XS -XXL

Sparco

MAR


FACING

aparco


MARTIN

RACING



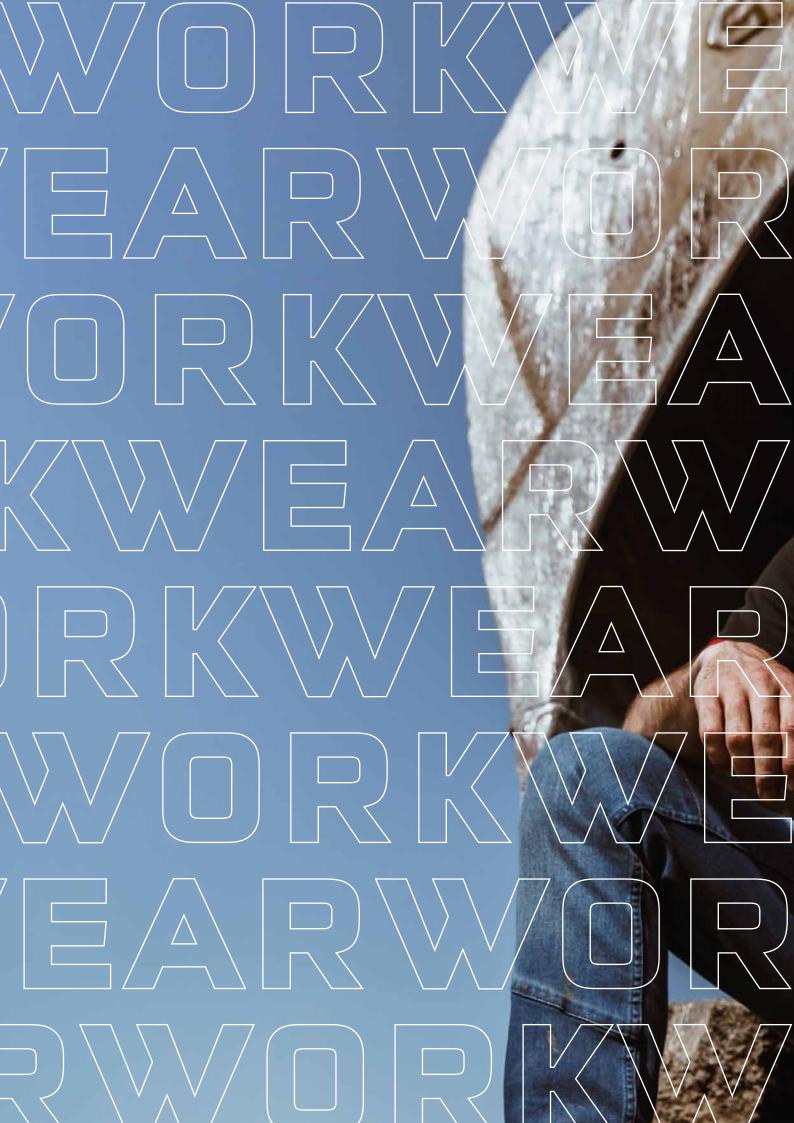



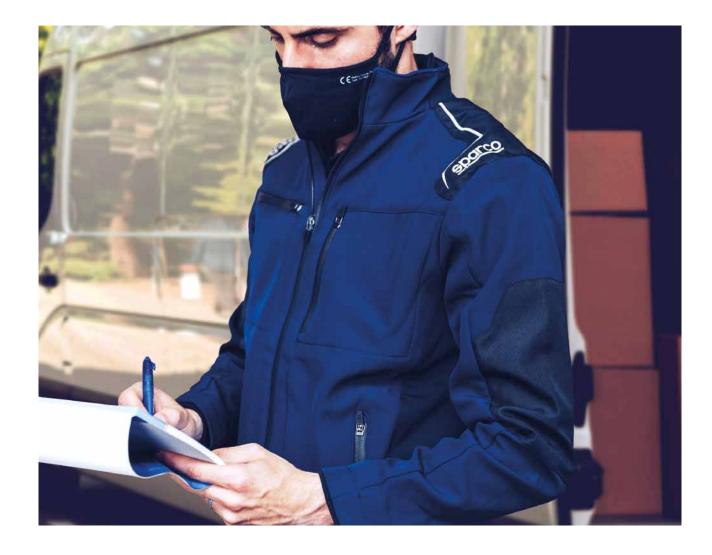



SOFTSHELL JACKET WEIGHT: 270 GR/M² COMPOSITION: 100% polyester SIZES: S - 3XL SPECIFICATIONS:

- Soft and light polyester water-repellent.
- Breathable stretch side inserts.
- Reinforced elbow inserts.
- Removable windproof hood.



SOFTSHELL JACKET WEIGHT: 270 GR/M² COMPOSITION: 100% polyester SIZES: S - 3XL

SPECIFICATIONS:

- Soft and light polyester water-repellent.
- Breathable stretch side inserts.
- Reinforced elbow inserts.
- Removable windproof hood.





HOUSTON

02401GSRS..





CARGO MULTISEASON PANTS WEIGHT: 310/320 gr/sqm COMPOSITION: 98% canvas cotton 2% elastane SIZES: S - 3XL

SPECIFICATIONS:

- Resistant stretch canvas cotton
- padded inserts on knees
- Closing flap with contrasting interior and elasticated sides
- Multi-pocket



JEANS WEIGHT: 350 gr/m² COMPOSITION: 98% drill cotton • 2% elastane SIZES: S - 3XL

SPECIFICATIONS:

- Stretch denim.
- Contrasting interior and elasticated sides.
- 5 pockets.

PANTS



02409DE..



BOSTON BLACK

02400NR..



CARGO MULTISEASON PANTS

WEIGHT: 260/270 gr/m² **COMPOSITION**: 98% drill cotton • 2% elastane SIZES: S - 3XL

SPECIFICATIONS:

- Soft stretch drill cotton
- Closing flap with contrasting interior
- and elasticated sides

- Multi-pocket



02400GS..

CARGO MULTISEASON PANTS

WEIGHT: 260/270 gr/m² COMPOSITION: 98% drill cotton • 2% elastane SIZES: S - 3XL

SPECIFICATIONS:

- Soft stretch drill cotton

BOSTON GREY

- Closing flap with contrasting interior
- and elasticated sides
- Multi-pocket



NEW

BERMUDA BLACK

02410NR..





BERMUDA CARGO

WEIGHT: 220 GR/M2 COMPOSITION: 97% cotton 3% elastane lycra gabardin SIZES: S - 2XL

SPECIFICATIONS:

- Soft and resistant stretch cotton fabric with contrast reinforcement stitching
- Flap closure at the waist with snap button,
- contrasting interior and elastic at the sides Multi-pocket

NEW

BERMUDA GREY

02410GS..





BERMUDA CARGO

WEIGHT: 220 GR/M2 COMPOSITION: 97% cotton 3% elastane • lycra gabardin

SIZES: S - 2XL

SPECIFICATIONS:

- soft and resistant stretch cotton fabric with contrast reinforcement stitching
- flap closure at the waist with snap button,
- contrasting interior and elastic at the sides - multi-pocket



WILSON ROYAL

02405AZ..



WINDSTOPPER JACKET

WEIGHT: 100 gr/m² COMPOSITION: 100% polyester SIZES: S - 3XL

SPECIFICATIONS:

- soft and lightweight water-repellent Polyester fabric.
- Coated zips with rubbered pullers.
- Elastic cuffs and hem.



WILSON NAVY

02405BM..



WINDSTOPPER JACKET

WEIGHT: 100 gr/m² COMPOSITION: 100% polyester SIZES: S - 3XL

SPECIFICATIONS:

- Soft and lightweight water-repellent Polyester fabric.
- Coated zips with rubbered pullers.
- Elastic cuffs and hem.



WINDSTOPPER JACKET

WEIGHT: 100 gr/m² COMPOSITION: 100% polyester SIZES: S - 3XL

SPECIFICATIONS:

- soft and lightweight water-repellent Polyester fabric.
- Coated zips with rubbered pullers.
- Elastic cuffs and hem.

NEW

WILSON RED

02405RS..



WINDSTOPPER JACKET

WEIGHT: 100 gr/m² COMPOSITION: 100% polyester SIZES: S - 3XL

SPECIFICATIONS:

- Soft and lightweight water-repellent Polyester fabric.
- Coated zips with rubbered pullers.
- Elastic cuffs and hem.





°



PHOENIX NAVY

02406BM..



FULL-ZIP SWEATSHIRT WEIGHT: 260 gr/m² COMPOSITION: outside 100% polyester inside 100% cotton SIZES: S - 3XL

SPECIFICATIONS:

- External fabric in soft and light polyester.
- Soft cotton jersey lining.
- Coated zips with rubbered pullers.
- Elasticated cuffs.

PHOENIX RED





FULL-ZIP SWEATSHIRT

WEIGHT: 260 gr/m² COMPOSITION: outside 100% polyester inside 100% cotton SIZES: S - 3XL

SPECIFICATIONS:

- External fabric in soft and light polyester.
- Soft cotton jersey lining.
- Coated zips with rubbered pullers.Elasticated cuffs.



PORTLAND ROYAL 02407AZ..



POLO WEIGHT: 200 gr/m² COMPOSITION: 100% cotton SIZES: S - 3XL

SPECIFICATIONS: - Soft and light piqué cotton. - Contrast color inserts.

- Stretch sleeves hem.



POLO

WEIGHT: 200 gr/m² COMPOSITION: 100% cotton SIZES: S - 3XL

SPECIFICATIONS:

- Soft and light piqué cotton.

- Contrast color inserts.

- Stretch sleeves hem.



POLO

WEIGHT: 200 gr/m² COMPOSITION: 100% cotton SIZES: S - 3XL

SPECIFICATIONS:

- Soft and light piqué cotton.
- Contrast color inserts.
- Stretch sleeves hem.

62



TRENTON ROYAL

02408AZ..



T-SHIRT WEIGHT: 180 gr/m² COMPOSITION: 95% cotton • 5% elastane SIZES: S - 3XL SPECIFICATIONS: Soft stretch cotton. - Contrast color inserts. - Soft rib collar.



T-SHIRT WEIGHT: 180 gr/m² COMPOSITION: 95% cotton • 5% elastane SIZES: S - 3XL SPECIFICATIONS:

- Soft stretch cotton.

- Contrast color inserts.

- Soft rib collar.







T-SHIRT WEIGHT: 180 gr/m² COMPOSITION: 95% cotton • 5% elastane SIZES: S - 3XL SPECIFICATIONS: - Soft stretch cotton.

- Contrast color inserts.
- Soft rib collar.

F-SHIRT





SPORTAC (PPE CAT. II)

oarco

NEW

66

002097..GI

PROTECTIVE GLOVES • EN 388:2016 • EN ISO 21420

PPE CATEGORY II: Synthetic glove protecting against mechanical risks

ABRASION RESISTANCE: • 4 (performance levels)

RESISTANCE TO BLADE CUTTING: • Coupe test: X (not done)

TEAR RESISTANCE:4 (performance levels)

PUNCTURE RESISTANCE:3 (performance levels)

RESISTANCE TO CUTTING BY BLADE EN ISO 13997: • D (performance levels)

EN PROTECTION AGAINST IMPACTS: • P (performance level)

SIZES:

8-11

SPECIFICATIONS:

 Adamant[®] diamond structure for a maximum level of cutting resistance;

exceptional comfort and dexterity;

• palm resistant to grease and wet grime;

• impact resistant on the back, shock absorbing structure on the palm of the hand.

002094..NRRS

MULTIPURPOSE GLOVES in micro-perforated polyamide and palm in high-grip microfibre, with fastening strap.

COMPOSITION:

85% polyamide

15% elastane


SIZES: S-XL

SPECIFICATIONS:

• touch-sensitive fingertips on index and thumb;

• foam protectors on the palm;

wrist fastening strap.

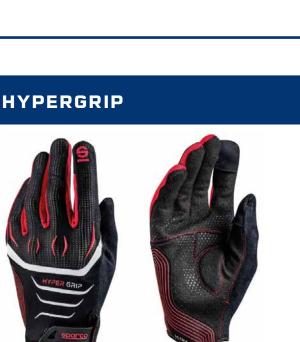



MECA III




and there are reinforcements positioned between the thumb and index finger;

• back in abrasion-resistant stretch and printed fabric;

• fastening strap to adjust fit.







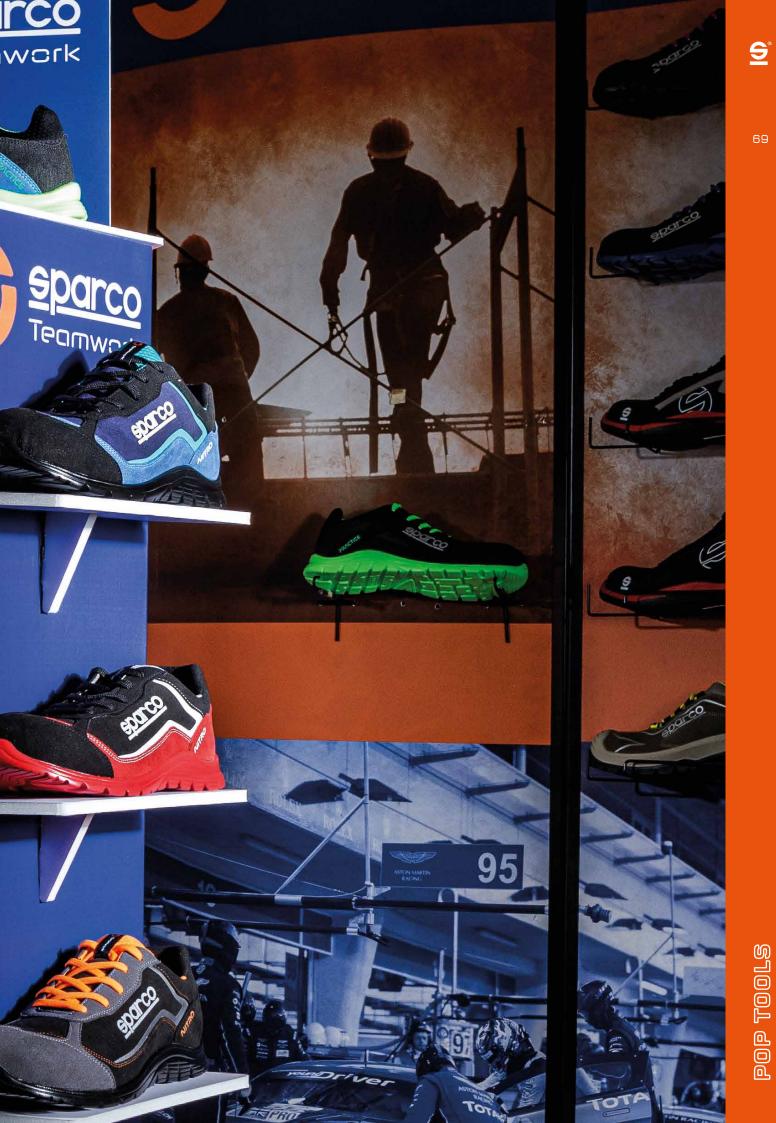

°



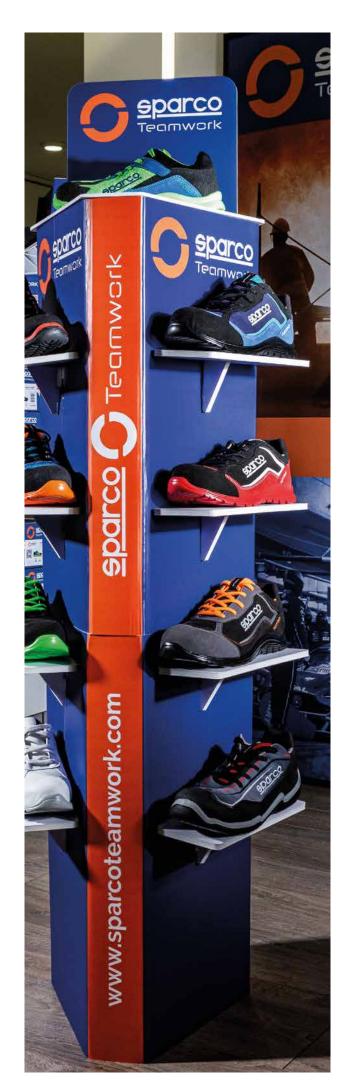

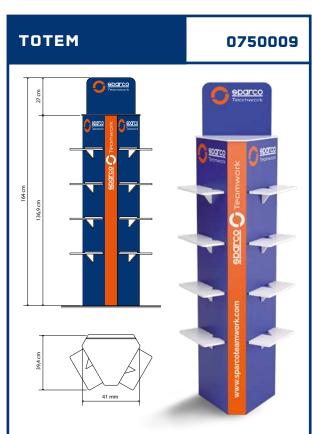

TOTEM

Light and durable material, suitable to show **8 shoe models** and a pair of shoes on the crowner.



H 17 X L 30 X P 17,5 CM Light and durable material, suitable to show 1 shoe. 5-piece set.

<u>5</u>

NEW

<text>



NEW







Flyers container, light and durable material, with an unmistakable racing style.

CERTIFICATIONS

GUIDE TO EN ISO 20345:2011 STANDARDS

Footwear for professional use in accordance with EN ISO 20345:2011 are marked with an "S" (Safety) as Safety Footwear. The so-called "basic" shoe is marked with the letters "SB" (S = Safety - "B" = Basic). This footwear must have the following minimum requirements:

height of the upper • toe cap (minimum length, minimum supporting base) • upper in fresh split leather, microfibre and similar • front lining • insole • sole in any type of material, can be smooth

- the upper, in the low footwear, can be opened in the heel area.
- In "SB" footwear, the following requirements are never included unless specified in detail:
- antistatic
 energy absorption of the heel
 dynamic waterproofing of the upper
 sole with lugs
- rear lining
 water-repellent upper
 anti-puncture plate or fabric.

The meaning of the stamping that you can find on the footwear is given below. They have been designed, equipped with toe caps designed to provide protection against impact when tested at an energy level of 200J".

EN ISO 20345:2011

Protective footwear in accordance with EN ISO 20345:2011 is called "Protective footwear".

- It is basically identical to safety footwear. The only differences are the following:
- \bullet impact protection toe cap with energy of 100 J and compression of 10 KN
- it is marked with "P" (Protective) in place of the "S" (Safety).
- NB: use in all workplaces where the protection of 100 J is sufficient.

THE MEANING OF THE EUROPEAN STANDARDS

EN ISO 20349:2010 Small splashes of molten metal such as those produced during welding operations and related processes. EN ISO 20344:2011 Test methodology and general requirements.

EN ISO 20345:2011 Specifications of safety footwear with toe resistance at 200 J.

EN ISO 20346:2011 Specifications of protective footwear with toe resistance at 100 J. EN ISO 20347:2012 Specifications of "work" or "professional" footwear. No specific toe cap resistance.

UNI 11583:2015 Footwear marked UNI 11583:2015 meets the requirements of the UNI 11583:2015 standard which

specifies the requirements for safety, protective and work footwear for professional use for work on sloping roofs.

FOOTWEAR CLASSIFIED "S"						
SB	BASIC Requirements					
S1/01	S1/01 BASIC requirements + S1 supplemented by:	 closed back (also low footwear) antistatic FO resistance to hydrocarbons energy absorption capacity of the heel 				
S2/02	S2/02 BASIC requirements + S2 supplemented by:	• dynamic waterproofing of the upper material				
S3/03	S3/03 BASIC requirements + S3 supplemented by:	 anti-puncture plate sole with lugs or tread 				
S4/04	S4/04 BASIC requirements + S4 supplemented by:	 antistatic energy absorption of the heel FO resistance to hydrocarbons 				
S 5	S5 BASIC requirements + S5 supplemented by:	anti-puncture platesole with lugs or tread				

SLIP RESISTANCE CLASSES

SRA	Slip resistance with ceramic ground with water and detergent.
SRB	Slip resistance with steel and glycerine ground.
SRC	Slip resistance with both conditions described above.

All Sparco Teamwork safety footwear is certified with SRC class slip resistance.

Marking of conformity with Regulation		Nome del fabbrican SPARCO	Production date 01∕≥022	
(EU) 2016/425		S3 SRC	WR	00000 - LANDO
EN ISO 20345:2011 European standard	Protection class	Slip resistance requirement	Additional requirements	Product code

The following are affixed on the gusset or on the tongue of the shoe:

• manufacturer's mark • the article code • the month and year of manufacture • CE conformity marking

PROTECTION CLASS Symbol		EN ISO 20345:2011			EN ISO 20347:2012			EN ISO EN ISO 20345:2011 20347:2012			Minimum required values EN ISO 20345:2011 + EN ISO 20347:2012			
			S1	S 2	53	OB	01	02	03	S 4	S5	04	05	
	Closed heel area	0				O	•	•	•					
	Toe cap resistant to an impact of 200J	•		•	•	-	-	-	-			-	-	Mechanical risk, toe protection, falling objects, foot impacts, height after impact ≥ 14mm (size 42)
	Toe cap resistant to static compression of 15 kN	•	•	•	•	-	-	-	-		•	-	-	Mechanical risk, toe protection, falling objects, foot impacts, height after impact ≥ 14mm (size 42)
A	Antistatic footwear	0	•	•	•	0	•	•	•	•	•	•	•	Electrical resistance of the bottom compressed between 1x105 OHM and 1x109 OHM
E	Energy absorption in the heel area	0	•	•	•	O	•	•	•	•	•	•	•	Mechanical risk: reduction of trauma to the heel resulting from impacts or falls from limited heights, mechanical energy ≥ 20 Joules
FO ex oro	Resistance to hydrocarbons of the sole	O	-	-	•	O	0	O	0			0	0	Volume increase of the sole sample < 12%
WRU	Penetration and water absorption of the upper	0	-	•	•	0	0	•	•	-	-	-	-	Resistance to penetration and absorption of water from the upper. H2O absorption after 60' ± 30% H2O transmitted after 60' ± 0.2 g
Р	Resistance to perforation of the bottom of the footwear	0	0	0	•	O	0	0		0	•	0	•	F 2 1100 N
CI	Insulation from the cold of the bottom of the footwear	0	0	0	0	0	0	0	0	0	0	0	0	Increase T ≥ 22°C placed on a plate at a T of 150°C for 30'
ні	Insulation from the heat of the bottom of the footwear	0	0	0	0	O	0	0	0	0	0	0	0	Decrease T ≥ 10°C in an environment at -17°C for 30'
С	Conductive footwear	0	-	-	-	O	-	-	-	-	-	-	-	Electrical resistance of the bottom < 1x105 OHM
HRO	Heat resistance by contact of the sole	0	0	0	0	O	0	O	0	0	0	0	0	Sample in contact at 300°C for 60"- Does not melt
AN	Ankle protection	0	0	0	0	O	0	0	0	0	0	0	0	Mechanical risk, ankle protection: average value transmitted force ≥ 10 kN maximum value <15 kN
\bigotimes	Electrically insulating footwear (Dielectric)	0*	-	-	-	O	-	-	-	0	0	0	0	Class 00 or Class 0 - CEI EN 50321 standard
WR	Water resistant footwear	0	0	0	0	o	0	O	O	-	-	-	-	After 1000 steps or after 80' of automatic dynamic cycle, no more than 3 cm2 of water must enter (stain)
Μ	Metatarsal protection	0	0	0	0	-	-	-	-	O	0	-	-	Mechanical risk, metatarsal protection: falling objects, impact to the foot. Height after impact 2 40 mm (size 42)
CR	Cutting resistance of the upper - F ≥ 1100 N	0	0	0	0	0	0	0	0	0	0	0	0	F 2 1100 N
SRC	(SRA+SRB) Requisito di antiscivolo	•	-	-	•	•	•	-	•	-	-	-	•	Protezione contro lo scivolamento su diverse superfici

= Mandatory requirement for the indicated category D = Optional requirement added to the mandatory ones, if indicated on the marking -= Non-mandatory requirement, check shoe stamping


ESD CEI EN 61340-5-1 2016 | COR 1:2017 STANDARD

The abbreviation ESD (ElectroStaticDischarge) indicates a discharge of static energy that passes from one body to another. In hazardous workplaces, ESD discharges can be the cause of even serious accidents (starting a fire), and can damage machinery and their sensitive components.

ESD shoes are required for:

• Work with microchips • Production of sensitive electrical parts • In painting

- Wthen working in contact with flammable liquids and gases
- Evaluated on ESD by conditioning the shoe at 12% relative humidity:
- resistance of the footwear/operator combination | metal electrode less than 1x10-9 ohm
- storage capacity of the electric charge of the footwear/operator combination | metal electrode less than 100 volts

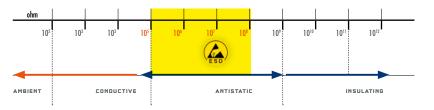

REGULATION (EU) 2016/425

Article 47: EC certificates issued in accordance with Directive 89/686/EEC are valid until 21/04/2023. After 21/04/2019, all new models must be certified according to Regulation 2016/425.

COMPLIANCE WITH THE REACH REGULATION

The company complies with the REACH Regulation (EC) no. 1907/2006 in force since 1 June 2007, ensuring that the products used and supplied by SPARCO TEAMWORK:

• do not contain SVHC (Substance of Very High Concern) substances;

• do not contain substances that are on the list in Annex XIV_ of the REACH Regulation;

- do not contain substances that are on the constantly updated Candidate List;
- do not contain substances subject to restrictions (Annex XVII of REACH) that the relative restrictions of use are observed.

Furthermore, in the event that an article contains an SVHC (Substance of Very High Concern) substance or one on the Candidate List in concentrations higher than 0.1% weight/weight, sufficient information is provided with the name of the substance and instructions helpful for the safe use of the article (see Article 59.1 of REACH).

ALPHABETICAL INDEX

SHOES LINES

•ADELAIDE	Page 27	• MIKKO	Page 24
•ALBERT	Page 27	• MODENA	Page 32
•ALGARVE	Page 48	• MOTEGI	Page 39
•ARCTIC	Page 45	•NELSON	Page 20
•BAKU	Page 38	• NIGEL	Page 18
•BOAVISTA	Page 48	• NIKI	Page 20
•BRUCE	Page 30	•OKAYAMA	Page 40
•CHARADE	Page 48	•OTT	Page 24
•CLAY	Page 29	•PALMA	Page 46
•DANI	Page 14	•PETTER	Page 23
• DIDIER	Page 23	•RICARD	Page 27
 DONINGTON 	Page 30	• RONNIE	Page 29
•DURANGO	Page 47	•SARNO	Page 33
•FLAP	Page 36	•SEB	Page 15
•GILLES	Page 30	•SOCHI	Page 40
•HALO	Page 36	•SPA	Page 28
•HANNU	Page 24	•SPLITTER	Page 34
•HINWIL	Page 43	•SPOILER	Page 35
• JACQUES	Page 19	•STIRIA	Page 40
•JODY	Page 19	•WING	Page 36
•JOS	Page 18	•WOKING	Page 43
•KEKE	Page 20	•ZELTWEG	Page 43
•LANDO	Page 14		
•LONATO	Page 33		
•LOSAIL	Page 28		
•MAGIONE	Page 32		
•MARCUS	Page 23		
•MARTINI	Page 17		
•MAX	Page 15		
• MIKI	Page 51		

5°

WORKWEAR

•BERMUDA	Page 57	•PORTLAND	Page 62
BOSTON	Page 56	•SEATTLE	Page 54
•DENVER	Page 55	•TRENTON	Page 63
HOUSTON	Page 55	•WILSON	Page 59
•PHOENIX	Page 61		

GLOVES

• HYPERGRIP				
•MECA III				
• SPORTAC				

Page **66** Page **67** Page **66**

POP TOOLS

- COUNTER DISPLAY Page 71
 FLYER DISPLAY Page 71
 LANYARD Page 71
 PORTACHIAVI Page 71
 SHELF HIGHLIGHTER Page 70
- •TOTEM Page 70

VALIDITY

From 01 January 2022 to 31 December 2022

The data and characteristics indicated in this price list are subject to changes without prior notice.

The photographic reproduction of the shades of colour may not be perfectly faithful to reality.

In order to constantly improve the collections, the products contained in this catalogue could be replaced or modified. The photos contained are purely illustrative and not binding.

Discover other automotive seats on our website.