

SPEC-D *Tuning*

2003-2005 HONDA ACCORD HEADLIGHTS

INSTALLATION INSTRUCTIONS



If you experience any difficulties that the instruction did not cover. Please seek local auto shop for advise. Please wear protection before you work on your vehicle.

An assistant is helpful when removing the front bumper.

Please be careful while working with the bumper or body part to avoid scratching.

Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED



+

*Phillips Screwdriver



-

*Flat-tip screwdriver



*Diagonal cutter



*Ratchet



*Extension



*10 mm Socket



*10 mm Combination Wrench

Product Part Numbers:

2LHP-ACD03-TM

2LHP-ACD03JM-TM

2LHP-ACD03B-TM

2LHP-ACD03JMB-TM



**HONDA ACCORD HEADLIGHTS
INSTALLATION INSTRUCTIONS**


If you experience any difficulties that the instruction did not cover, Please seek local auto shop for advise.
Please wear protection before you work on your vehicle.




An assistant is helpful when removing the front bumper.

Please be careful while working with the bumper or body part to avoid scratching.

Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.

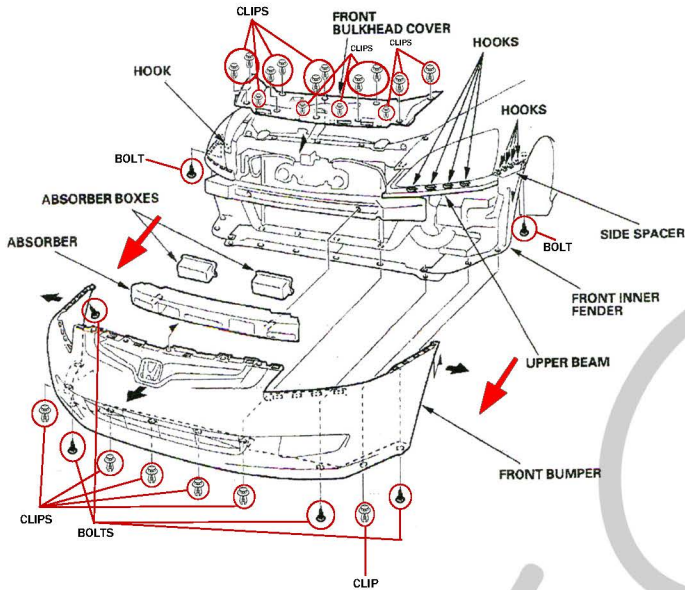


1. Remove the front bumper

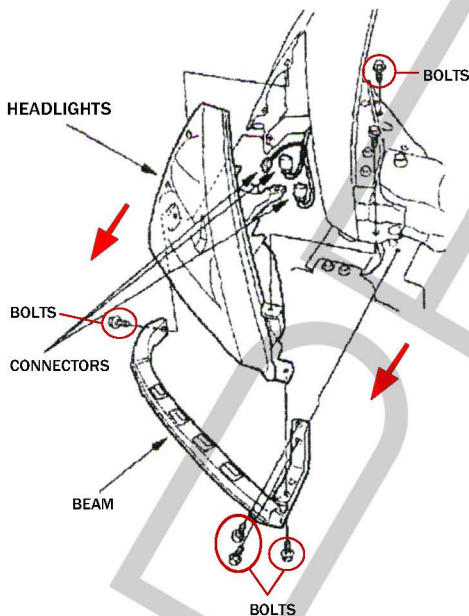

2. Remove the connectors from the headlights assembly

3. Remove the five mounting bolts and the harness clip, then remove the headlight

4. Remove the bolt and the corner upper beam from the headlight

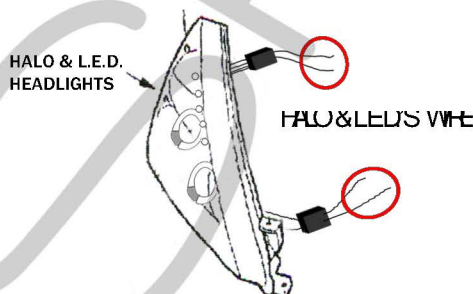

If your headlights don't have HALO or L.E.D. Please skip Step 5

5. Connect the Halo and L.E.D. wires to driving lights (please see the Halo and L.E.D. installation instructions)

HONDA ACCORD HEADLIGHTS INSTALLATION INSTRUCTIONS


*If you experience any difficulties that the instruction did not cover, Please seek local auto shop for advise.

*Please wear protection before you work on your vehicle.

*An assistant is helpful when removing the front bumper.


*Please be careful while working with the bumper or body part to avoid scratching.

*Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.

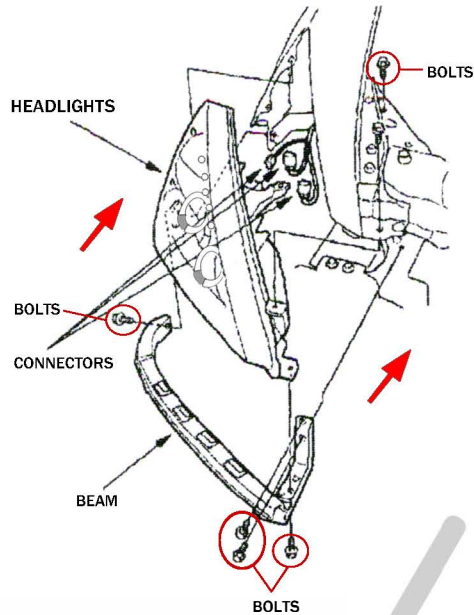

6. Connect the connectors from the headlight

7. Install the mounting bolts and headlights

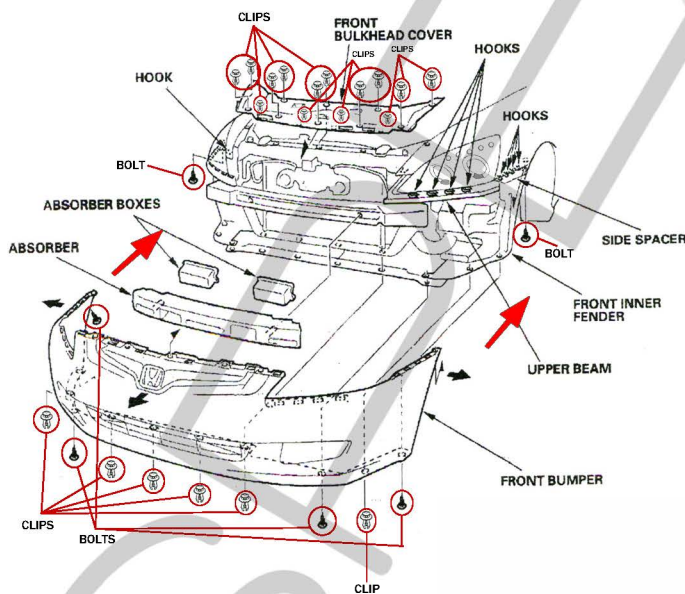

8. Install the front bumper

9. Complete the installation