

# SPEC-D *Turning*

## 1996-1998 HONDA CIVIC HEADLIGHT INSTALLATION INSTRUCTION



- \*If you experienced any difficulties that the instruction did not cover. Please seek local auto shop for advise.
- \*Please wear protection before you work on your vehicle.
- \*An assistant is helpful when removing the front bumper.
- \*Please be careful while working with the bumper or body part to avoid scratching.
- \*Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED



\*Phillips Screwdriver



\*Flat-tip screwdriver



\*Diagonal cutter



\*Ratchet



\*Extension



\*10 mm Socket



\*10 mm Combination Wrench

### Product Part Number:

2LHP-CV96-TM


2LHP-CV96JM-TM




## HONDA CIVIC HEADLIGHT INSTALLATION INSTRUCTION




- \*If you experienced any difficulties that the instruction did not cover, Please seek local auto shop for advise.
- \*Please wear protection before you work on your vehicle.
- \*An assistant is helpful when removing the front bumper.
- \*Please be careful while working with the bumper or body part to avoid scratching.
- \*Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.

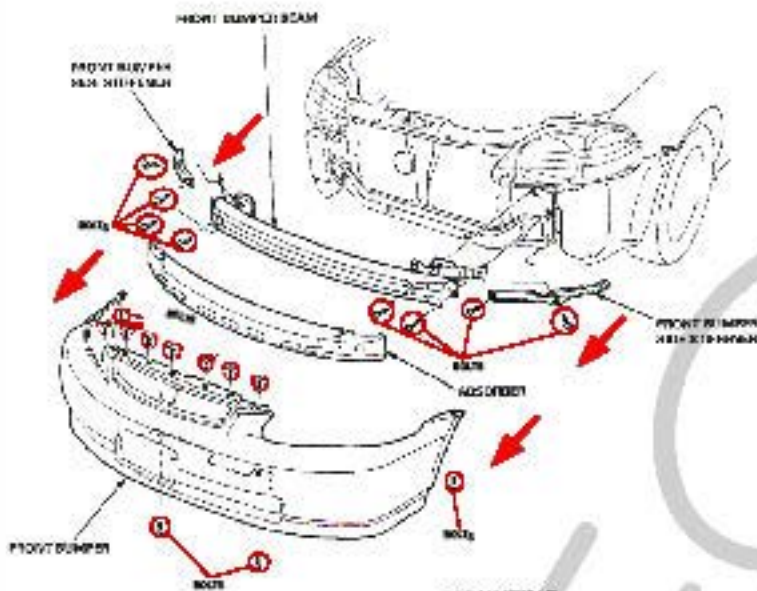

1. Remove the front bumper.
2. Remove the mounting bolts.

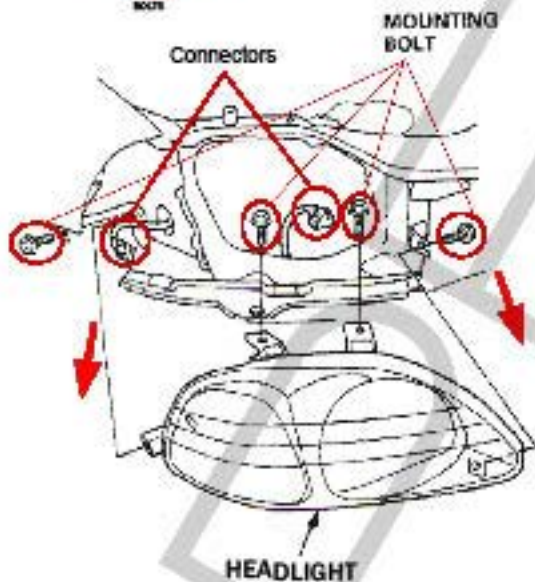

3. Disconnect connectors, then remove the headlights assembly.

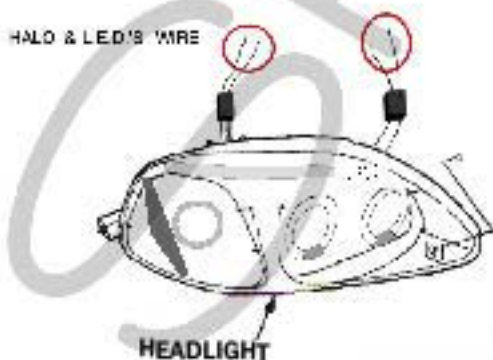

- If your headlights don't have HALO or L.E.D. Please skip Step 4
4. Connect the \*Halo and L.E.D. wires to driving lights (please see the Halo and L.E.D. installation instruction)

# 1996-1998 HONDA CIVIC HEADLIGHT INSTALLATION INSTRUCTION

\*If you experienced any difficulties that the instruction did not cover. Please seek local auto shop for advise.




\*Please wear protection before you work on your vehicle.

\*An assistant is helpful when removing the front bumper.


\*Please be careful while working with the bumper or body part to avoid scratching.

\*Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.

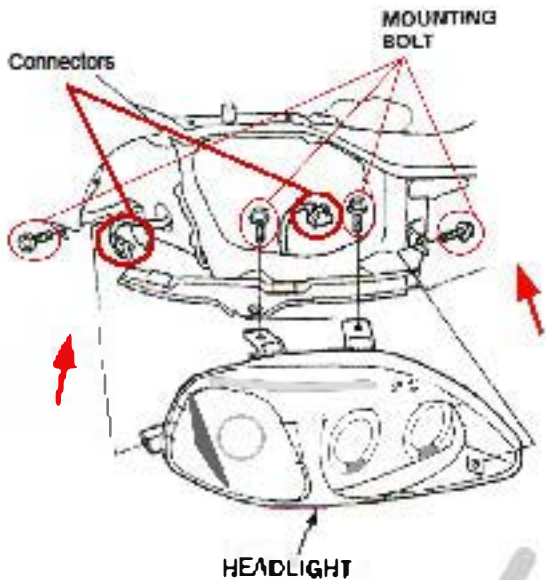

5. Connect each connector, then install the headlights assembly.

6. Install the mounting bolts.

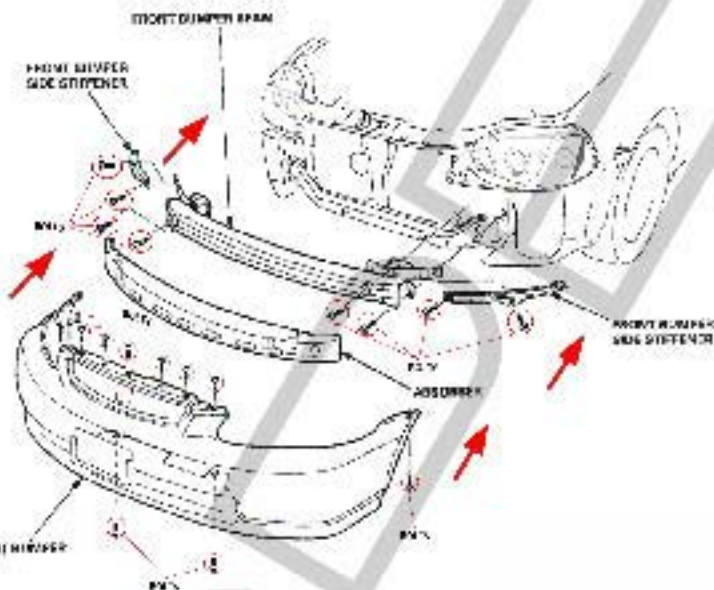

7. Install the front bumper and mounting bolts.

8. Complete the installation.