

# SPEC-D *Turning*

## 2007-2010 GMC YUKON DENALI **PROJECTOR HEADLIGHTS** INSTALLATION INSTRUCTIONS



If you experience any difficulties that the instruction did not cover, Please seek local auto shop for advise.  
Please wear protection before you work on your vehicle.  
An assistant is helpful when removing the front bumper.  
Please be careful while working with the bumper or body part to avoid scratching.  
Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED

Handy Remover

¼" Drive Ratchet

¼" Drive Extensions (3 to 6 inches)

10mm Socket

If your Headlight is Halo type, you also need: 2 Red Wires (8 inch)

Wire Stripper

Wire Crimper

4 Blue Quick Splice Wire Connectors

2 Black Wires (8 inch)

### **Product Part Numbers:**

2LHP-DEN07-TM

2LHP-DEN07JM-TM



## GMC YUKON DENALI PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS



If you experience any difficulties that the instruction did not cover, Please seek local auto shop for advise.  
Please wear protection before you work on your vehicle.  
An assistant is helpful when removing the front bumper.  
Please be careful while working with the bumper or body part to avoid scratching.  
Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.



1. Open the hood, there are six bolts that needs to be removed



2. Remove two bolts under wheel well



3. Remove one hidden bolt between the bumper and fender



4. Remove two headlight bolts



5. Pull out the headlight a little bit, just enough to see the wire harness in the back




6. Disconnect the connectors from the headlight



7. Remove the harness from the OEM headlight



8. Pull out the driving light bulb

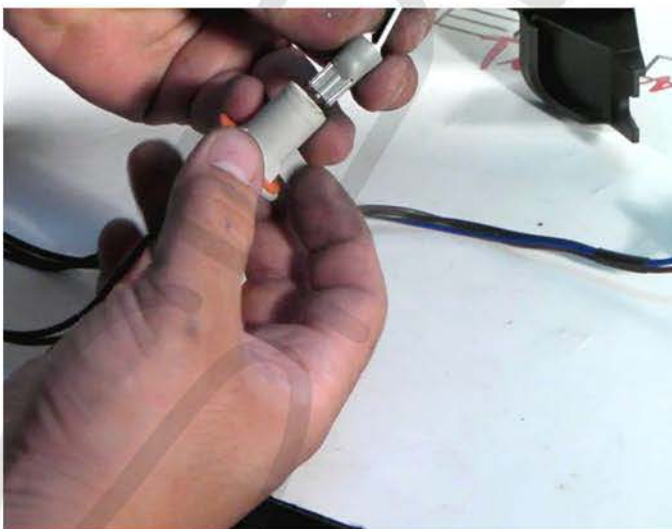

9. Connect the driving light socket to the LED wire please make sure that the black wire (negative) and connects with the black wire



10. Connect all the connectors and harness to new headlight Please see the "Halo and L.E.D installation instructions" If your headlights don't have HALO or L.E.D. You can skip



11. Connect the connectors with the vehicle



12. Put the new headlight into the original spot




13. Install two bolts to fasten the headlight



14. Install one hidden bolt between the bumper and fender



15. Install two bolts under wheel well

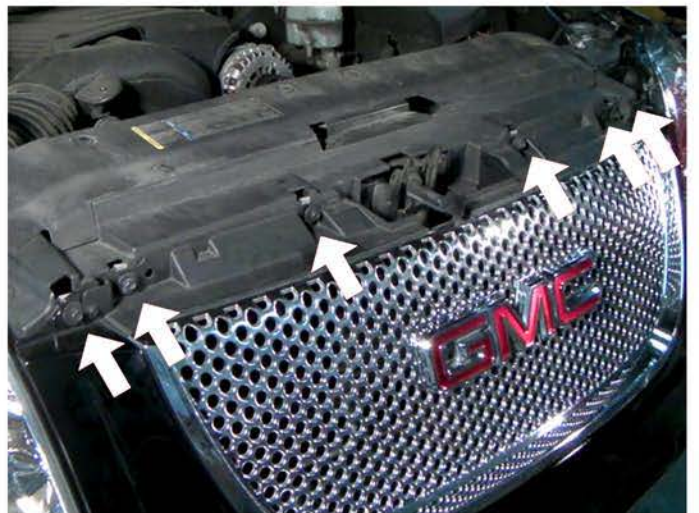

16. Install six bolts for the top front grill



17. The installation is now complete  
please repeat the picture order from 1 to 17 for the  
opposite side

