

# SPEC-D *Tuning*

## 2009 - UP FORD F150 PROJECTOR **HEADLIGHTS** INSTALLATION INSTRUCTIONS

\*If you experience any difficulties that the instructions did not cover, Please seek assistance at local automotive shop.

\*Please wear protection before you work on your vehicle.

\*An assistant is useful when removing the front bumper from your vehicle.

\*Please be cautious when working with the bumper or any parts belonging to the vehicles' body prevent scratching.

\*Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.



### TOOLS AND SUPPLIES REQUIRED

¼" Drive Ratchet

Handy Remover

If your Headlight is Halo type, you also need:

4 Blue Male Quick Wire Connectors

6" Extension

Trim Pad Remover

Wire Stripper

4 Blue Female Quick Wire Connectors

10mm Socket

Wire Crimper

2 Red Wires (8 inch)

Phillips Screwdriver

4 Blue Quick Splice Wire Connectors

2 Black Wires (8 inch)

### Product Part Numbers:

2LHP-F15009JM-TM

2LHP-F15009-TM

2LHP-F15009JMB-TM

2LHP-F15009B-TM



## 2009-UP FORD F150 PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.



1. Remove the plastic lip



2. Pull the rubber shield to the side



3. 10mm bolt location



4. Remove the 10mm bolt



5. (2) 10mm bolts location



6. Remove the (2) 10mm bolts




7. Remove the headlight




8. Disconnect the headlight harness



9. Disconnect the headlight harness

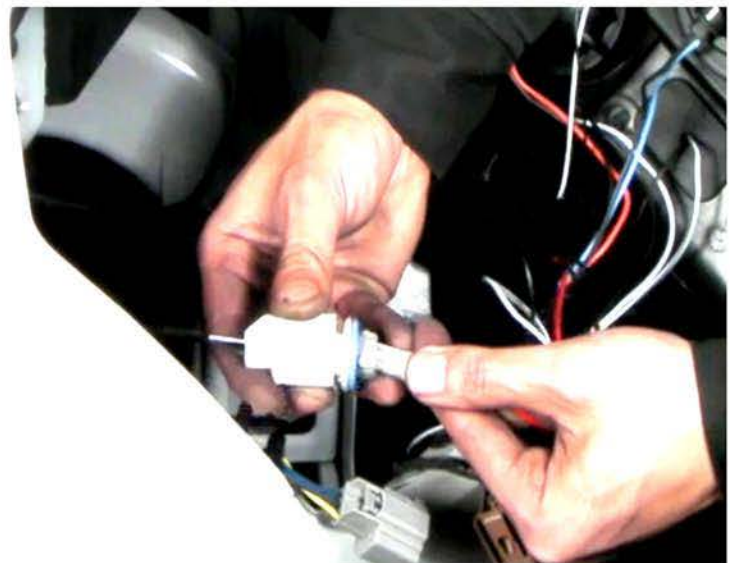

10. Connect the headlight harness to the new headlight

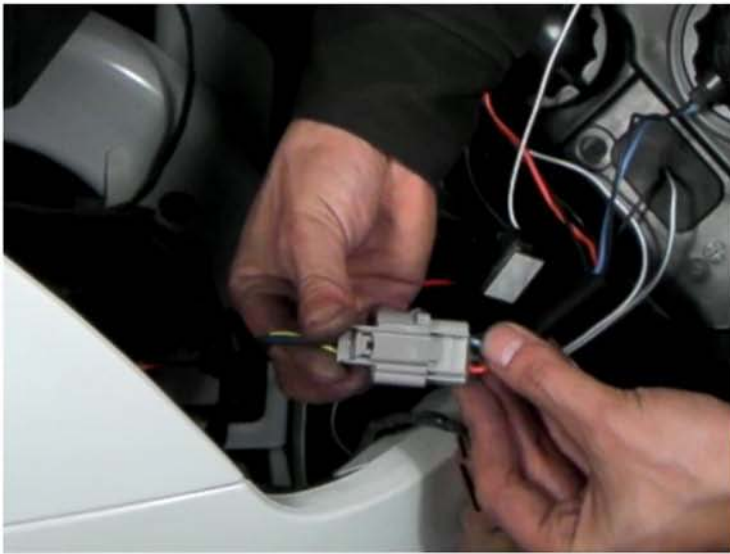

11. Connect the headlight harness to the new headlight  
Please see the "Halo and L.E.D installation instructions"  
If your headlights don't have HALO or L.E.D. You can skip this step



12. Place the new headlight in the stock location



13. Tighten the (2) 10mm bolts



14. Tighten the 10mm bolt



15. Remove the headlight  
Please repeat the steps in order from 1 to 14 for the opposite side



16. The installation is now complete