

Installation & CARE

1999-2004 JEEP GRAND CHEROKEE HALO LED PROJECTOR HEADLIGHTS

BEFORE INSTALLATION

- If you experience any difficulties that the instruction did not cover, please seek assistance at local automotive shop.
- Please wear protection before you work on any vehicle.
- An assistant is useful when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

1/4" Ratchet	6" Extension	7mm Socket	Handy Remover
			

PRODUCT NUMBER

2LHP-GKEE99JM-TM
2LHP-GKEE99G-TM
2LHP-GKEE99-TM



LET'S START THE INSTALLATIONS



STEP 1

Before installation



STEP 2

Remove the 7mm bolt



STEP 3

Pull forward to remove the headlight



STEP 4

Disconnect the headlight harness



STEP 5

Disconnect the headlight harness



STEP 6

Remove the light sockets



STEP 7

Remove the light sockets



STEP 8

Install the light sockets to the new headlight



STEP 9

Install the light sockets to the new headlight



STEP 10

Connect the headlight harness. Please see the "Halo & LED headlights installation instructions" If your headlights don't have Halo and led, you can skip the instruction



STEP 11

Connect the headlight harness




STEP 12

Press the headlight into the position




STEP 13

Secure the headlight with the 7mm bolt

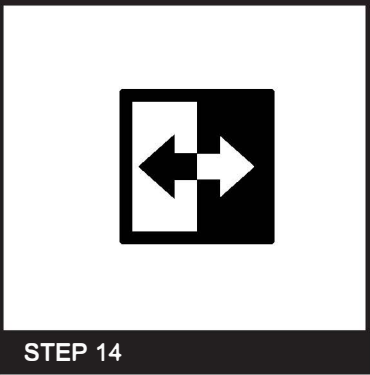

STEP 14

Please repeat the steps from 1 to 13 for the opposite side

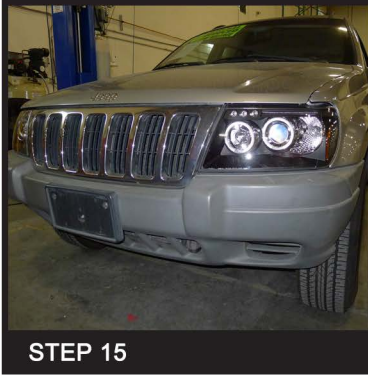

STEP 15

The installation now is complete