


PARTS INCLUDED

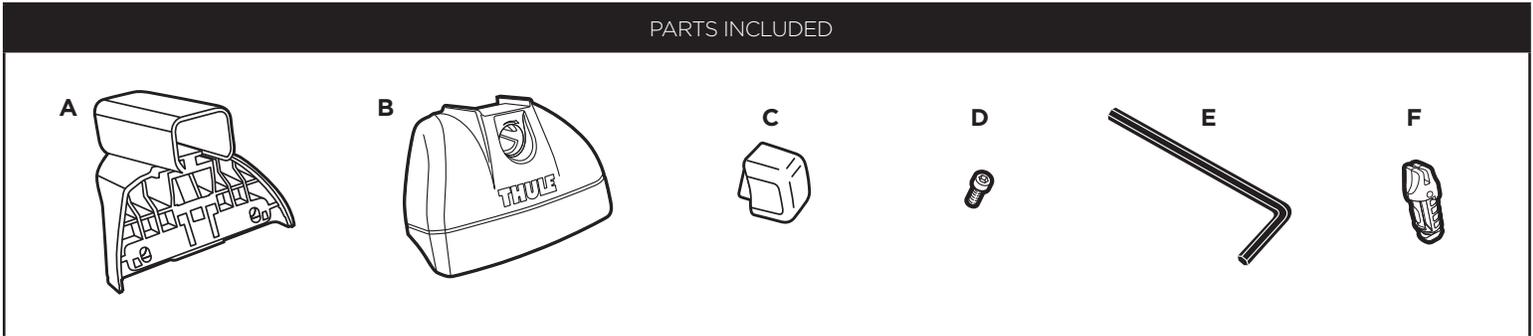

part	description	part number	qty.
A	460 Podium foot	7521968001	4
B	460 Podium foot cover	8522382001	4
C	endcap	8533593	4
D	hex bolt M6 x 16	919061631	8
E	hex key M5	8530930	1
F	lock plug	8536395	4


WARNINGS / LIMITATIONS:

- The load you are carrying plus the weight of the roof rack must not exceed the maximum roof weight specified by the vehicle's manufacturer.
- Long loads such as, but not limited to, paddleboards, kayaks, surfboards, canoes, lumber, mattresses, and construction materials must be securely tied down at minimum to the roof rack and to the front of the vehicle.


 Overloading the vehicle roof and/or failing to secure the load properly may result in loss of the load or the rack system, damage to the vehicle, and/or damage to other persons or property.

PARTS NOT INCLUDED


THULE ONE KEY SYSTEM



FIT KIT




LOAD BARS




- Complete your Load Carrier with the recommended Fit Kit and Load Bar for your vehicle.

1

A

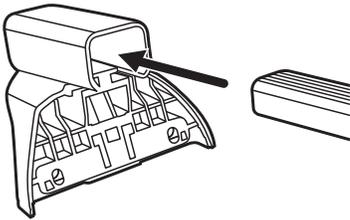



B

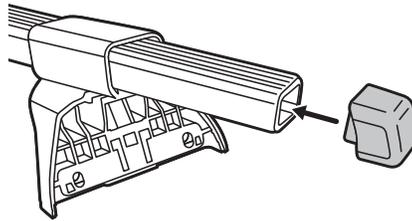

INSTALLATION:

A. Slide bar into foot.


B. Install end cap.

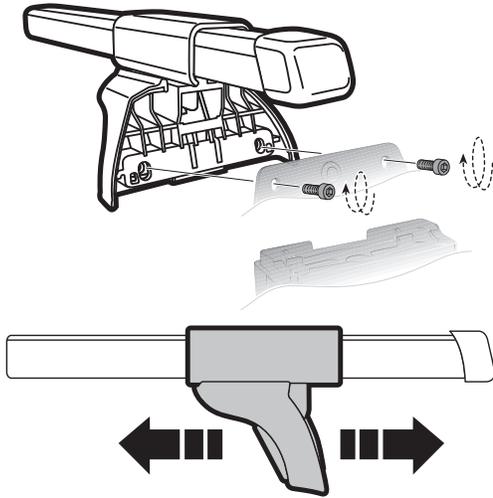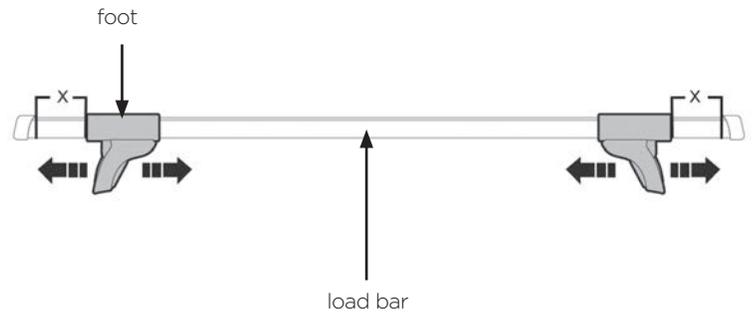2**A****B****FOOT OPERATION:**

- A. Check Fit Kit for specific installation instructions for your vehicle. Your unique Fit Kit will install to the 460 foot with two M6 x 16mm hex bolts (included with foot pack). Attach Fit Kit to vehicle and center load bar on the vehicle. Tighten the Fit Kit to the foot. This will secure the bar to the foot.
- B. NOTE: The best way to make sure your bars are centered is to measure how much bar sticks out from the outside of the foot (X) and then to adjust the bar until those measurements are equal.

3

A

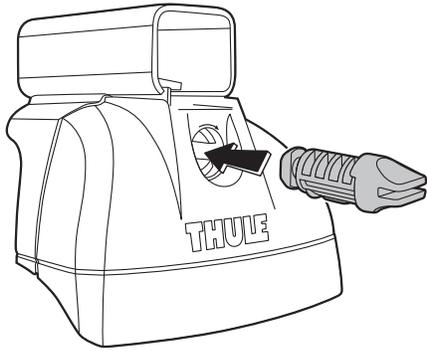

INSTALLING LOCK COVER PLUG:


A. Insert lock cover plug into foot cover and move to the "locked" position. This will keep the foot cover secured to the foot.

NOTE: Lock cover bump must face downward to ensure proper connection.


B. Using your thumb to cover the Thule logo and apply pressure to the cover. This will keep the cover from "popping" while turning the lock plug.

C. Use a coin, or flathead screw driver to turn the lock plug clockwise; locking the cover in place.


B

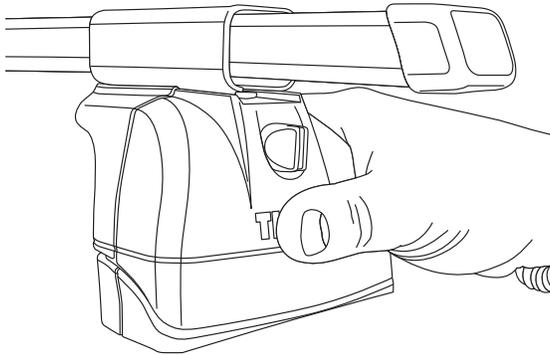

C

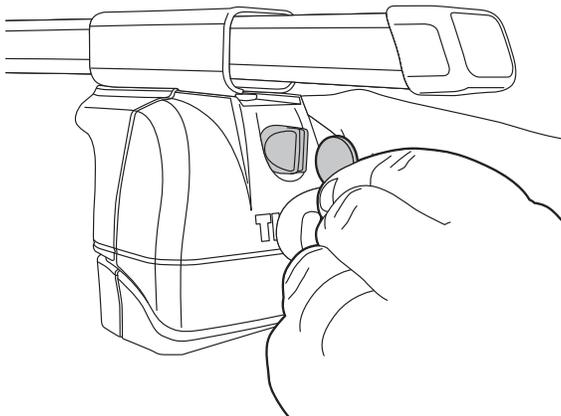

A

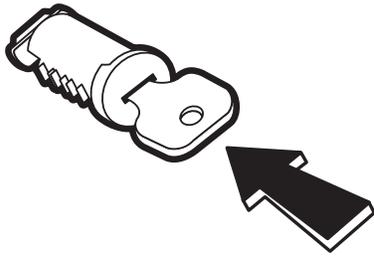

INSTALLING LOCKS IF PURCHASED:

A. Insert square key into cylinder.


B. Insert cylinder into foot.

C. Once you have installed the lock core, insert the "N" series key. Press thumb against Thule logo and hold. This will prevent the cover from "popping" when turning the key clockwise to the locked position.

- With your thumb, cover the Thule logo and apply pressure to the cover. This will prevent the cover from "popping".

- With pressure applied turn the key clockwise to lock the cover to the foot, which will prevent access to the mounting hardware.

B

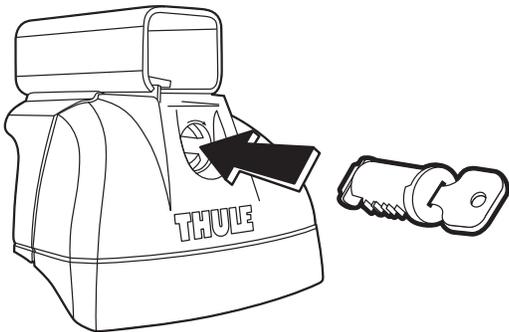

C

