POWERSPORTS Product & Application

WARN

AXON

BECAUSE SOME TRAILS TWIST AND TURN. AND SOME ARE JUST PLAIN TWISTED.

The potent mixture of adrenaline, determination and pride has been getting mankind into trouble for decades. WARN has always been at the head of the class when it comes to bailing them out, and now we've left the rest of the class way behind with a completely re-imagined and re-engineered line of powersports winches. Backed by over 70 years of off-road know-how, the new AXON and VRX winches have rewritten the rules for high performance winches, with game changing technologies and the bomb-proof reliability only WARN can offer. And we're more than just winches—from must-have rigging accessories to hard-working plow systems, WARN offers a full line-up of reliable, trusted gear that lets you ride with confidence. So whether you're hitting the trails or working the land, make sure you're WARN-equipped—and take having fun or getting the job done to a whole new level.



CONTENTS

Winches	2-	-19
Winching Accessories	.20-	-27
Winch Mounting Systems/Bumpers	.28-	-33
Plows	.34-	-49

WARN AXON POWERSPORTS WINCHES: ADD SOME BRAINPOWER TO YOUR HORSEPOWER.

EREPARED

Carlos

Rocky terrain, unpredictable conditions, and unexpected challenges can make anyone feel the heat. That's why WARN's new AXON winches take an already legendary reputation for proven performance to a whole new level. Re-engineered from the ground up, AXON winches completely protect critical components from water and mud with critical electronics sealed inside the metal housing. Advanced technology and controls monitor temperature and provide user feedback, all adding up to previously unachievable levels of reliability. AXON delivers technology you can count on in any situation with brute force capacity ranges from 3,500 to 5,500 lbs. and steel or Spydura rope options. All this from WARN – the company that has always put reliability above all else. If you live for pushing limits, you can't live without the AXON.





With the all-new AXON[™] lineup, WARN has taken winching to the next level by combining a powerful motor and first-of-its-kind digital contactor into one unit called a Motactor[™]. The WARN Motactor increases performance, drops installation time, and provides never-before-seen levels of performance and feedback to the user. Tech is nothing without durability, so we made AXON the most durable powersports winch ever. All-metal construction, waterproof sealing, and increased structural rigidity are made for extreme environments. It's smart, tough, and perfect for a wide range of powersports vehicles. Available in 3,500, 4,500, and 5,500 pulling capacities, with a choice of steel or Spydura[®] synthetic rope.

- Motactor (motor + digital contactor) dramatically simplifies winch installation —reducing install time by up to 50%
- Advanced digital controls allow for monitoring of speed, load, and motor temperature
- Built-in load limiter prevents damage from overloading winch
- All-metal, IP68 waterproof construction is exceptionally durable and keeps the elements out
- All-new modular controls allow for expandability
- Robust new clutch design based on legendary WARN 4WD hub lock know-how
- Limited lifetime warranty (mechanical), 3 year warranty (electrical)

AXON 55 Controls

remote.



AXON 45 Controls

Includes Rockerbar digital control switch and digital corded remote.

AXON 35 Controls

Includes Rockerbar digital control switch with handlebar mount adaptor. (Remote sold separately)

AXON LINE-UP

101155 AXON 55 50' of 1/4" steel rope, roller fairlead, Rockerbar digital control switch, and digital corded remote

101150 AXON 55-S

50' of 1/4" Spydura synthetic rope, Epic hawse fairlead, Rockerbar digital control switch, and digital corded remote

101145 AXON 45

50' of 1/4" steel rope, roller fairlead, Rockerbar digital control switch, and digital corded remote

101140 AXON 45-5

50' of 1/4" Spydura synthetic rope, Epic hawse fairlead, Rockerbar digital control switch, and digital corded remote

101240 AXON 45RC

Short drum design is optimized for mounting in the tight space required with some Side x Sides. 27' of 1/4" Spydura synthetic rope, Epic hawse fairlead, Rockerbar digital control switch, and digital corded remote

101135 AXON 35

50' of 7/32" steel rope, roller fairlead, Rockerbar digital control switch with handlebar mount adaptor

101130 AXON 35-5

50' of 3/16" Spydura synthetic rope, Epic hawse fairlead, Rockerbar digital control switch with handlebar mount adaptor





WARN[®] AXON[™] POWERSPORTS WINCHES

GROUNDBREAKING TECHNOLOGY MEETS UNMATCHED RELIABILITY

SPYDURA®

SYNTHETIC

load limit

POWERFUL, HIGH-EFFICIENCY MOTOR Redesigned and re-engineered from the ground up, the new AXON motor is the biggest in the **OR STEEL ROPE** industry, delivering maximum pulling power with Increased diameter minimum amp draw rope is rated to exceed the rated

WARN MOTACTOR™ Unique motor + digital contactor design dramatically simplifies installation, reducing

winch install time by up to 50%

TIE PLATE CONSTRUCTION New design delivers increased structural rigidity

PLANETARY GEAR TRAIN The new, completely re-engineered three-stage gear train delivers reliable pulling power that is fast, quiet and more efficient than ever

WATERPROOF **CONSTRUCTION**[™] The world's only Powersports winch with full IP68 waterproof

rating. Built to keep the

water and elements out

MECHANICAL BRAKE Internal brake is engineered to hold the full rated load and

offers excellent control while winching

DIGITAL CONTROL AXON delivers never-before-seen levels of performance and user feedback including load and temperature info

MAR

FULL METAL ARMOR Protects vital components from impact and damage. The aluminum structure also helps to dissipate heat, helping to extend winching duty-cycle and performance



WARRANTY AXON has a limited lifetime warranty on mechanical parts,

LIMITED LIFETIME

and a three-year warranty on electrical components. It's the best in the industry– all backed by a global service network and a WARN name that's trusted worldwide

CORROSION RESISTANT FINISH Satin-black powder-coated finish with stainless

steel fasteners looks great and resists corrosion. Salt-spray tested for over 400 hours four times industry's standard



ERGONOMIC WINCH CONTROLS Ultra-durable rubberized corded remote and dash switch are totally waterproof and reliable (IP68 rated)

CLUTCH DIAL Robust, easy-to-handle new design. Based on proven WARN 4WD hub lock know-how. Built to last.







SPECIFICATIONS

Rated line pull: 4,500 Lbs. (2041 kg) single-line

Motor: Motactor with 12V DC permanent magnet

Rope: AXON 45: 50' x 1/4"(15m x 6.3mm) steel,

Primary control: Rockerbar digital control switch Remote control: Digital corded remote

Mechanical Warranty: Limited lifetime

AXON 45-S: 50' x 1/4" (15m x 6.3mm) Spydura synthetic

AXON 45 AND 45-S

Part number: 101145 (AXON 45), 101140 (AXON 45-S)

Sealing: IP68-rated waterproof

Gear train: 3-stage planetary

Fasteners: All stainless steel

Hook: Black powder coat

Fairlead: AXON 45: Roller, AXON 45-S: Epic hawse fairlead

Brake: Mechanical Brake

Electrical Warranty: 3 year

(A) 15.0" (381.8mm)

B 4.82" (122.5mm)

Line Pull

Lbs. (kg)

1000 (454)

1500 (680)

0 500 (227)




AXON 45RC (SHORT DRUM)

Part number:	101240 (AXON 45RC)
Rated line pul	I: 4,500 Lbs. (2041 kg) single-line
dotor: Motact	or with 12V DC permanent magnet
ealing: IP68-	rated waterproof
Gear train: 3-s	stage planetary
asteners: All	stainless steel
Rope: AXON 4	5RC: 27' x 1/4"(8m x 6.3mm)
opydura synth	etic
look: Black p	owder coat
airlead: AXO	N 45RC: Epic hawse fairlead
rimary contr	ol: Rockerbar digital control switch
Remote contro	ol: Digital corded remote
Brake: Mechai	nical Brake
Aechanical W	arranty: Limited lifetime
ectrical War	rantv: 3 vear

AXON 55 AND 55-S

SPECIFICATIONS
Part number: 101155 (AXON 55), 101150 (AXON 55-S)
Rated line pull: 5,500 Lbs. (2495 kg) single-line
Motor: Motactor with 12V DC permanent magnet
Sealing: IP68-rated waterproof
Gear train: 3-stage planetary
Fasteners: All stainless steel
Rope: AXON 55: 50' x 1/4" (15m x 6.3mm) steel, AXON 55-S: 50' x 1/4" (15m x 6.3mm) Spydura synthetic
Hook: Black powder coat
Fairlead: AXON 55: Roller, AXON 55-S: Epic hawse fairlead
Primary control: Rockerbar digital control switch
Remote control: Digital corded remote
Brake: Mechanical brake
Mechanical Warranty: Limited lifetime
Electrical Warranty: 3 year

DIMENSIONS



A 15.0" (381.8mm)	(C) 5.19" (132mm)
B 4.82" (122.5mm)	D 5.02" (127.6mm)

Mounting bolt pattern: 3.0" x 6.59" (76.2mm x 167.4mm)

12V DC PERFORMANCE SPECS (first layer)

			. , .
Line Pull	Line Speed	Motor	Pull by layer:
Lbs. (kg)	Ft./min.	Current	layer/Lbs. (kg)
	(M/min.)		
0	15.8 (4.8)	28 amps	1/5500 (2495)
500 (227)	13.4 (4.1)	49 amps	2/4582 (2078)
1000 (454)	11.5 (3.5)	71 amps	3/3926 (1781)
1500 (680)	10.0 (3.0)	92 amps	4/3434 (1558)
2000 (907)	8.8 (2.7)	114 amps	
2500 (1134)	8.0 (2.4)	135 amps	
3000 (1361)	7.3 (2.2)	155 amps	
3500 (1588)	6.8 (2.1)	176 amps	
4000 (1814)	6.3 (1.9)	196 amps	
4500 (2041)	5.9 (1.8)	216 amps	
5000 (2268)	5.4 (1.6)	235 amps	
5500 (2495)	4.8 (1.5)	254 amps	

DIMENSIONS

-6

C 5.19" (132mm)

D 5.02" (127.6mm)

Motor Pull by layer:

16.3 (5.0) 33 amps 1/4500 (2041)

13.8 (4.2) 48 amps 2/3749 (1700)

11.8 (3.6) 68 amps 3/3212 (1457)

10.3 (3.1) 91 amps 4/2810 (1275)

Current layer/Lbs. (kg)

Mounting bolt pattern: 3.0" x 6.59" (76.2mm x 167.4mm)

12V DC PERFORMANCE SPECS (first layer)

Line Speed

Ft./min.

(M/min.)


 2000 (907)
 9.1 (2.8)
 114 amps

 2500 (1134)
 8.3 (2.5)
 136 amps

 3000 (1361)
 7.7 (2.4)
 156 amps

 3500 (1588)
 7.3 (2.2)
 174 amps

4000 (1814)7.0 (2.1)191 amps4500 (2041)6.7 (2.0)208 amps



 (A) 13.31" (338.1mm)
 (C) 3.47" (88.3mm)

 (B) 4.80" (122mm)
 (D) 3.30" (83.9mm)

Mounting bolt pattern: 3.0" x 4.87" (76.2mm x 123.7mm)

12V DC PERFORMANCE SPECS (first layer)

Line Pull	Line Speed	Motor	Pull by layer:
Lbs. (kg)	Ft./min.	Current	layer/Lbs. (kg)
	(M/min.)		
0	16.3 (5.0)	28 amps	1/4500 (2041)
500 (227)	14.0 (4.3)	49 amps	2/3696 (1676)
1000 (454)	12.1 (3.7)	69 amps	3/3135 (1422)
1500 (680)	10.7 (3.2)	88 amps	4/2722 (1235)
2000 (907)	9.6 (2.9)	108 amps	
2500 (1134)	8.8 (2.7)	126 amps	
3000 (1361)	8.2 (2.5)	145 amps	
3500 (1588)	7.9 (2.4)	163 amps	
4000 (1814)	7.7 (2.3)	181 amps	
4500 (2041)	7.5 (2.3)	198 amps	



AXON 35 AND 35-S

SPECIFICATIONS
Part number: 101135 (AXON 35), 101130 (AXON 35-S)
Rated line pull: 3,500 Lbs. (1588 kg) single-line
Motor: Motactor with 12V DC permanent magnet
Sealing: IP68-rated waterproof
Gear train: 3-stage planetary
Fasteners: All stainless steel
Rope: AXON 35: 50' x 7/32"(15m x 6.3mm) steel, AXON 35-S: 50' x 3/16" (15m x 4.8mm) Spydura synthetic
Hook: Black powder coat
Fairlead: AXON 35: Roller, AXON 35-S: Epic hawse fairlead
Primary control: Rockerbar digital control switch with handlebar mount adaptor
Remote control: Sold separately
Brake: Mechanical Break
Mechanical Warranty: Limited lifetime
Electrical Warranty: 3 year

DIMENSIONS

	- R	t
B		B
D		
© ®		

 (A)
 13.31" (338.1mm)
 (C)
 3.47" (88.3mm)

 (B)
 4.80" (122mm)
 (D)
 3.30" (83.9mm)

Mounting bolt pattern: 3.0" x 4.87" (76.2mm x 123.7mm)

12V DC PERFORMANCE SPECS (first layer)

			(
Line Pull	Line Speed	Motor	Pull by layer:
Lbs. (kg)	Ft./min.	Current	layer/Lbs. (kg)
	(M/min.)		
0	20.2 (6.2)	35 amps	1/3500 (1588)
500 (227)	17.8 (5.4)	58 amps	2/2934 (1331)
1000 (454)	15.8 (4.8)	81 amps	3/2525 (1145)
1500 (680)	14.2 (4.3)	105 amps	4/2216 (1005)
2000 (907)	12.9 (3.9)	129 amps	5/1975 (896)
2500 (1134)	11.8 (3.6)	154 amps	
3000 (1361)	10.7 (3.2)	178 amps	
3500 (1588)	9.5 (2.9)	204 amps	



WARN VRX POWERSPORTS WINCHES: PART WINCH. PART WORKHORSE. 100% WARN.

Whether your day involves tracking down a buck or working the cattle ranch, more durability is never a bad thing. And the new WARN VRX winches are the very definition of durability. Not only is the all new VRX completely waterproof, it also features a sturdy all-metal drivetrain and end housing, improved clutch design, increased capacity and class leading motor technology. The new best-in-class VRX elevates every feature of our standard duty winch except the price. The result: a whole lot of get-the-job-done-ability.





WARN VRX

All-New Lineup Takes Performance And Value To Levels Never Before Seen In A Powersports Winch

Whether you're on the job or on the trail, WARN VRX winches work as hard as you do thanks to all-metal construction, a new clutch based on the legendary WARN 4WD hublock design, an ultra-durable all-metal gear train, and full waterproof sealing to take on the elements. VRX is available in 2,500, 3,500, and 4,500 lb. capacities and is perfect for a variety of vehicles and any job-big or small.

- Full IP68-rated waterproof sealing keeps the elements out
- Durable all-metal construction
- Robust new clutch design based on 70+ years of WARN 4WD hub lock know-how
- Black powder-coated finish for corrosion resistance
- Load-holding brake for great control
- Smooth and reliable all-metal three-stage planetary gear train
- Limited lifetime warranty (mechanical), 3 year warranty (electrical)

VRX 45 Controls Includes dash-mounted control switch and

VRX 35 Controls Includes handlebar mini-rocker control switch. (Remote sold separately.)

corded remote.

VRX 25 Controls Includes handlebar mini-rocker control switch. (Remote sold separately.)

VRX LINE-UP

101045 VRX 45 50' of 1/4" steel rope, roller fairlead, dashmounted control switch, and corded remote

101040 VRX 45-S 50' of 1/4" synthetic rope, cast aluminum hawse fairlead, dash-mounted control switch, and corded remote

101035 VRX 35 50' of 7/32" steel rope, roller fairlead, and handlebar mini-rocker switch

101030 VRX 35-S 50' of 3/16" synthetic rope, cast aluminum hawse fairlead, and handlebar mini-rocker switch

101025 VRX 25 50' of 3/16" steel rope, roller fairlead, and handlebar mini-rocker switch

101020 VRX 25-S 50' of 3/16" synthetic rope, cast aluminum hawse fairlead, and handlebar mini-rocker switch





12 POWERSPORTS

WARN[®] VRX[™] POWERSPORTS WINCHES

PREMIUM FEATURES WITHOUT THE PREMIUM PRICE

diameter

rope is rated to exceed the rated load limit

CORROSION RESISTANT FINISH Semi-gloss black powder-coated finish looks great and resists corrosion. Salt-spray tested to exceed industry's standard

SYNTHETIC PLANETARY GEAR TRAIN OR STEEL ROPE The new, completely re-engineered Increased

three-stage gear train delivers reliable pulling power that is fast, quiet, and more efficient than ever ALL-METAL CONSTRUCTION Durable external shell protects vital components from impact and damage

POWERFUL, HIGH-EFFICIENCY MOTOR Redesigned and re-engineered from the ground up, the best-inclass VRX motor delivers

big pulling power with low amp draw

WATERPROOF CONSTRUCTION IP68-rated waterproof construction is built to reliably keep the water and elements out

MECHANICAL BRAKE Internal brake is engineered to hold the full rated load and offers excellent control while winching

> CLUTCH DIAL Robust, easy-to-handle new design. Based on proven WARN 4WD hub lock know-how. Built to last

VRX has a limited lifetime warranty on mechanical parts, and a three-year warranty on electrical components. It's the best in the industryall backed by a global service network and a WARN name



ERGONOMIC WINCH CONTROLS Includes hand-held corded remote and dash or handlebar-mounted switch, depending on winch model



Includes powder-coated hawse or roller fairlead (depending on winch model)

SZ ZZZ



14 POWERSPORTS





VRX 45 AND 45-S

SPECIFICATIONS **Part number:** 101045 (VRX 45), 101040 (VRX 45-S) Rated line pull: 4,500 Lbs. (2041 kg) single-line Motor: 12V DC permanent magnet Sealing: IP68-rated waterproof Gear train: 3-stage planetary Fasteners: All stainless steel Rope: VRX 45: 50' x 1/4" (15m x 6.3mm) steel, VRX 45-S: 50' x 1/4" (15m x 6.3mm) synthetic Hook: Zinc plated Fairlead: VRX 45: Roller, VRX 45-S: Cast aluminum hawse Primary control: Dash-mounted rocker Remote control: Corded remote Brake: Mechanical Brake Mechanical Warranty: Limited lifetime Electrical Warranty: 3 year


VRX 35 AND 35-S

3FEOIFICATION3
Part number: 101035 (VRX 35), 101030 (VRX 35-S)
Rated line pull: 3,500 Lbs. (1588 kg) single-line
Motor: 12V DC permanent magnet
Sealing: IP68-rated waterproof
Gear train: 3-stage planetary
Fasteners: All stainless steel
Rope: VRX 35: 50' x 7/32" (15m x 5.5mm) steel, VRX 35-5: 50' x 3/16" (15m x 4.8mm) synthetic
Hook: Zinc plated
Fairlead: VRX 35: Roller, VRX 35-S: Cast aluminum hawse
Primary control: Handlebar-mounted rocker switch
Remote control: Sold Separately
Brake: Mechanical Brake
Mechanical Warranty: Limited lifetime
Electrical Warranty: 3 year

VRX 25 AND 25-S

SPECIFICATIONS
Part number: 101025 (VRX 25), 101020 (VRX 25-S)
Rated line pull: 2,500 Lbs. (1134 kg) single-line
Motor: 12V DC permanent magnet
Sealing: IP68-rated waterproof
Gear train: 3-stage planetary
Fasteners: All stainless steel
Rope: VRX 25: 50' x 3/16" (15m x 4.8mm) steel,
/RX 25-S: 50' x 3/16" (15m x 4.8mm) synthetic
Hook: Zinc plated
Fairlead: VRX 25: Roller,
/RX 25-S: Cast aluminum hawse
Primary control: Handlebar-mounted rocker switch
Remote control: Sold Separately
Brake: Mechanical Brake
Mechanical Warranty: Limited lifetime
Electrical Warranty: 3 year


DIMENSIONS



Mounting bolt pattern: 3.0" x 6.59" (76.2mm x 167.4mm)

12V	DC	PERFO	RM	ANCE	SP	ECS (first l	ayer)
			~			-		

Line Pull	Line Speed	Motor	Pull by layer:
Lbs. (kg)	Ft./min. (M/min.)	Current	layer/Lbs. (kg)
0	16.2 (4.9)	20 amps	1/4500 (2041)
500 (227)	14.1 (4.3)	44 amps	2/3749 (1700)
1000 (454)	12.2 (3.7)	69 amps	3/3212 (1457)
1500 (680)	10.5 (3.2)	94 amps	4/2810 (1275)
2000 (907)	9.0 (2.7)	119 amps	
2500 (1134)	7.7 (2.3)	145 amps	
3000 (1361)	6.5 (2.0)	171 amps	
3500 (1588)	5.6 (1.7)	198 amps	
4000 (1814)	4.9 (1.5)	225 amps	
4500 (2041)	4.3 (1.3)	252 amps	



A	13.36" (339.4mm)	(D) 4.10" (104.3mm)
B	4.74" (120.5mm)	(E) 3.30" (83.9mm)
C	3.07" (78 mm)	🕒 3.48" (88.3mm)

Mounting bolt pattern: 3.0" x 4.87" (76.2mm x 123.7mm)

12V DC PERFORMANCE SPECS (first layer)

2000 (907) 7.6 (2.3) 100 amps 5/1975 (896)

Ft./min.

(M/min.)

 2500 (1134)
 6.2 (1.9)
 124 amps

 3000 (1361)
 5.0 (1.5)
 155 amps

 3500 (1588)
 4.0 (1.2)
 192 amps

Line Speed Motor Pull by layer:

15.8 (4.8) 20 amps 1/3500 (1588)

13.4 (4.1) 41 amps 2/2934 (1331)

11.2 (3.4) 60 amps 3/2525 (1145)

9.3 (2.8) 79 amps 4/2216 (1005)

Current layer/Lbs. (kg)

Line Pull

Lbs. (kg)

1000 (454)

1500 (680)

0 500 (227)

	đ	B
(Ā)	

DIMENSIONS

A	13.2" (335.3mm)	D 3.94" (100.2mm)
\sim	4.74" (120.5mm)	(E) 3.30" (83.9mm)
C	3.07" (78 mm)	🕑 3.48" (88.3mm)

Mounting bolt pattern: 3.0" x 4.87" (76.2mm x 123.7mm)

12V DC PERFORMANCE SPECS (first layer)

Line Pull	Line Speed	Motor	Pull by layer:
Lbs. (kg)	Ft./min. (M/min.)	Current	layer/Lbs. (kg)
0	17.5 (5.3)	20 amps	1/2500 (1134)
500 (227)	14.3 (4.3)	45 amps	2/2141 (971)
1000 (454)	12.0 (3.6)	71 amps	3/1872 (849)
1500 (680)	9.9 (3.0)	98 amps	4/1663 (754)
2000 (907)	8.0 (2.4)	128 amps	5/1496 (679)
2500 (1134)	6.8 (2.1)	159 amps	





CHOOSING THE RIGHT WINCH: VRX VS. AXON

Whether it's a hard-working ATV or a dune-hopping Side x Side, different vehicles-and different tasks-require different winches. Warn offers its powersports winches in capacities ranging from 2,500 lbs. (1134 kg) all the way up to a massive 5,500 lbs. (2495 kg), with ultra-durable steel or lightweight, easy-to-handle synthetic rope.

But no matter which winch you choose, you'll get IP68-rated waterproofing to keep the water and elements out; all-metal construction for the ultimate in durability; a three-stage planetary gear train for smooth and reliable operation; and an easy-to-turn clutch dial based on decades of WARN 4WD hub-lock know-how.

PRODUCT LINE COMPARISON

FEATURES	VRX	AXON
Available capacities (lbs.)	2,500, 3,500, 4,500	3,500, 4,500, 5,500
Suitable Vehicles	ATVs and 2 person Side x Sides	Large ATVs and 2 person and 4 person Side x Sides
Anchoring System	Through drum technology	Through drum technology
Motor Type	Standard duty permanent magnet	WARN patented Motactor - integrated high performance motor and contactor
Contactor	External, remotely mounted contactor	Warn patented Motactor - integrated high performance motor and contactor
Remote Control	VRX 25 — handlebar switch VRX 35 — handlebar switch VRX 45 — dash rocker and wired remote	AXON 35 — Rockerbar digital control switch and handlebar mount adaptor AXON 45 — Rockerbar digital control switch and digital wired remote AXON 55 — Rockerbar digital control switch and digital wired remote
Performance Sensors	None	Actively monitors winch load, temperature, and vehicle battery condition
Clutch Mechanism	Hub-lock based, easy-grip, protected clutch design	Hub-lock based, easy-grip, protected clutch design
Wiring	4 - + & -, battery to contactor, contactor to winch	2 - +&-, battery to winch
Synthetic Rope	Standard duty synthetic rope	Spydura synthetic rope
Hawse Fairlead	Cast aluminum hawse	Epic premium aluminum hawse
Brake system	Integrated compact spring brake	Integrated compact spring brake
Winch structural bracing	Tie rods	Tie plate
Final point of assembly	Warn facility in Oregon, USA	Warn facility in Oregon, USA
Sealing	IP68	IP68
Corrosion resistance	240 hour salt spray	408 hour salt spray
Fasteners	All stainless steel	All stainless steel
Warranty Mechanical	Limited Lifetime	Limited lifetime
Warranty Electrical	3 years	3 years



STEEL VS. SYNTHETIC WINCH ROPE.

WARN AXON and VRX winches are available with either steel rope or synthetic rope. But which one is right for you? Let's look at some of the features and benefits of both.

Steel rope is extremely durable, abrasion resistant, and is good for utility applications where the line may contact objects like stumps, rocks, and other things that rub against the rope. Of course it's still a good choice for vehicle recovery, and has been used for decades by enthusiasts and workers alike. However, steel rope is heavier and less flexible than synthetic line. Steel rope is less expensive than synthetic rope.

Synthetic rope is strong, lightweight, easy to handle, and it'll even float on water making it great for vehicle recovery. Synthetic rope is more prone to damage by abrasion, and requires the use of the included abrasion sleeve when the rope comes into contact with an object. Additionally, synthetic rope should be inspected regularly for ultraviolet (UV) wear and is more expensive than steel rope. However, it's a great choice for those who are looking to keep weight down, push the limits with their vehicle, and use the winch frequently.

WINCH SPECIFICATIONS: AXON VS. VRX

	VRX 25 VRX 25-S	VRX 35 VRX 35-5	VRX 45 VRX 45-S	AXON 35 AXON 35-S	AXON 45 AXON 45-S AXON 45RC	AXON 55 AXON 55-S
Pulling Capacity	2,500 lbs	3,500 lbs	4,500 lbs	3,500 lbs	4,500 lbs	5,500 lbs
Finish	Semi-gloss powdercoat	Semi-gloss powdercoat	Semi-gloss powdercoat	Satin black powder coat	Satin black powder coat	Satin black powder coat
Mechanical Warranty	Limited lifetime	Limited lifetime	Limited lifetime	Limited lifetime	Limited lifetime	Limited lifetime
Electrical Warranty	3 year	3 year	3 year	3 year	3 year	3 year
Weight	VRX 25 - 17.3 lbs VRX 25-S - 14.7 lbs	VRX 35 - 18.8 lbs VRX 35-S - 15.1 lbs	VRX 45 - 21.7 lbs VRX 45-S - 17.0 lbs	AXON 35 - 23.3 lbs AXON 35-S - 19.7 lbs	AXON 45 - 25.8 lbs AXON 45-S - 21.1 lbs AXON 45RC - 20.0 lbs	AXON 55 - 25.8 lbs AXON 55-S - 21.1 lbs
Winch Dimensions (WxDxH)	13.1" x 4.7" x 4.7"	13.4" x 4.7" x 4.7"	15.0" x 4.7" x 4.7"	13.3" x 4.6" x 4.8"	AXON 45, 45-S - 15.0" x 4.6" x 4.8" AXON 45RC - 13.3" x 4.6" x 4.8"	15.0" x 4.6" x 4.8"
Mounting pattern	3.0" x 4.87"	3.0" x 4.87"	3.0" x 6.59"	3.0" x 4.87"	AXON 45, 45-S - 3.0" x 6.59" AXON 45RC - 3.0" x 4.87"	3.0" x 6.59"
Rope type	VRX 25 - 3/16" x 50' wire VRX 25-5 - 3/16" x 50' synthetic rope	VRX 35 - 7/32" x 50' wire VRX 35-S - 3/16" x 50' synthetic rope	VRX 45 - 1/4" x 50' wire VRX 45-S - 1/4" x 50' synthetic rope	AXON 35 - 7/32" x 50' wire AXON 35-S - 3/16" x 50' Spydura synthetic rope	AXON 45 - 1/4" x 50' wire AXON 45-S - 1/4" x 50' Spydura synthetic rope AXON 45RC - 1/4" x 27' Spydura synthetic rope	AXON 55 - 1/4" x 50' wire AXON 55-5 - 1/4" x 50' Spydura synthetic rope
Winch Structural Bracing	Zinc plated tie-rods	Zinc plated tie-rods	Zinc plated tie-rods	Tie plate	Tie plate	Tie plate
Hook	Zinc plated	Zinc plated	Zinc plated	Black powder coat	Black powder coat	Black powder coat
Fairlead	VRX 25 - Roller VRX 25-S - Cast aluminum hawse	VRX 35 - Roller VRX 35-S - Cast aluminum hawse	VRX 45 - Roller VRX 45-S - Cast aluminum hawse	AXON 35 - Roller AXON 35-S - EPIC Pre- mium Hawse Fairlead	AXON 45 - Roller AXON 45-S, 45RC- EPIC Premium Hawse Fairlead	AXON 55 - Roller AXON 55-S - EPIC Pre- mium Hawse Fairlead
Clutch	Hub-lock based, easy-grip, recessed clutch design	Hub-lock based, easy-grip, recessed clutch design	Hub-lock based, easy-grip, recessed clutch design	Hub-lock based, easy-grip, recessed clutch design	Hub-lock based, easy- grip, recessed clutch design	Hub-lock based, easy- grip, recessed clutch design
Winch Controls	Handlebar mini-rocker	Handlebar mini-rocker	Dash mounted rocker Wired remote	Rockerbar digital control switch and Handlebar mount adaptor	Rockerbar digital control switch and Digital wired remote	Rockerbar digital control switch and Digital wired remote
Fasteners	All stainless steel	All stainless steel	All stainless steel	All stainless steel	All stainless steel	All stainless steel
Gears	Powdered metal	Powdered metal	Powdered metal with bushings	Powdered metal	Heat treated powdered metal with bushings	Heat treated powdered metal with bushings
Geartrain	3-stage planetary	3-stage planetary	3-stage planetary	3-stage planetary	3-stage planetary	3-stage planetary
Gear ratio	153:1	153:1	198:1	168:1	239:1	239:1
Brake	Integrated compact spring brake	Integrated compact spring brake	Integrated compact spring brake	Integrated compact spring brake	Integrated compact spring brake	Integrated compact spring brake
End housing	Die-cast aluminum	Die-cast aluminum	Die-cast aluminum	Die-cast aluminum	Die-cast aluminum	Die-cast aluminum
Durability	1100+ cycles	1100+ cycles	1100+ cycles	1100+ cycles	1100+ cycles	1100+ cycles
Corrosion resistance	240 hour salt spray	240 hour salt spray	240 hour salt spray	408 hour salt spray	408 hour salt spray	408 hour salt spray
Sealing	IP68	IP68	IP68	IP68	IP68	IP68
No Load Line Speed	17.5 ft/min	15.8 ft/min	16.2 ft/min	20.2 ft/min	16.3 ft/min	15.8 ft/min
Full Load Line Speed	6.8 ft/min	4.0 ft/min	4.3 ft/min	9.5 ft/min	AXON 45, 45-S - 6.7 ft/min AXON 45RC - 7.5 ft/min	4.8 ft/min
No Load Current Draw	20 A	20 A	20 A	35 A	AXON 45, 45-S - 33 A AXON 45RC - 28 A	28 A
Full Load Current Draw	159 A	192 A	252 A	204 A	AXON 45, 45-S - 208 A AXON 45RC - 198 A	254 A

1B **POWERSPORTS**

WINCH ACCESSORIES: EVERYTHING YOU NEED TO GO PREPARED

Trust WARN Accessories to put the "can do" in self-rescue. Portable. Versatile. Dependable. WARN offers a full line-up of utilitarian gear-from the top end Epic rigging equipment, to a host of other tools for any application. Whatever your need, combining your WARN winch with the correct accessory kit makes it an even more versatile and productive tool.



WARN EPIC ACCESSORIES

Featuring a Warn-exclusive 12-stage coating process; utilizing e-coat and powder coatings, these market leading accessories deliver visual appeal, improved impactresistance and a longer wear cycle than standard winch accessories.

EPIC TREE TRUNK PROTECTOR

The WARN Epic Tree Trunk Protector Strap is

designed to help protect a live tree from dam-

age during winching operations and self-recovery

situations. The strap is constructed of premium

quality nylon with an encased red warning marker

to indicate damaged webbing. Plus, end loops are

reinforced with durable ring connectors and e-coated

and powder coated for premium protection against

wear and abrasion. The 1" x 8' Tree Trunk Protector

is rated to 7.200 lbs.

PN 92094 1" x 8' (2.5cm x 2.4m)

TOOL ROLL RECOVERY KIT

PN 99901

one convenient tool roll. The kit includes:

This compact recovery kit offers must-have Powersports winching accessories in

hook-and-loop enclosure that firmly attaches to ATV racks or Side x Side roll bars

A tool roll, two 1/2" (12.7mm) shackles, a tree strap, and winching gloves

• Tool roll doubles as a winch line damper for increased safety during recovery

The tool roll is constructed of durable ballistic nylon with secure

Includes additional storage space for other accessories and tools

Rated to 7,200 lbs. (3266 kg)

EPIC SHACKLE

The Epic Shackle provides a means for connecting the looped ends of cables, straps, and snatch blocks. The shackle's pin is threaded to allow easy removal. Rated for 5,000 lb. capacity winches and under.

PN 92092 1/2" (12.7mm) shackle with 5/8" (15.9mm) pin diameter For 5,000 lb. (2268 kg) capacity winches and under

EPIC WINCH HOOK

The WARN Epic Winch Hook provides maximum protection and reliability against wear and abrasion. It's also been uniquely designed with a built-in beverage opener. The hook is rated for 5,000 lb. capacity winches and under.

PN 92089 For 5,000 lb. (2268 kg) capacity winches and under



EPIC SNATCH BLOCK

Able to accept both wire and synthetic rope, the Epic Snatch Block is reliable, durable, and ready for action. When used properly, the multi-purpose snatch block can double the pulling power of any winch or change your pulling direction without damaging the rope. It also

helps to reduce heat buildup and amp draw during recovery. Rated for 5,000 lb. winch capacities and under.

PN 92097 Rated for 5,000 lbs. (2268 kg) winch capacity and under



WARN

LIGHT DUTY WINCHING ACCESSORY KIT

Double your pulling power, change your pulling direction, and keep your winch in proper working order. Accessory Kit includes 1/2" (12.7mm) shackle, 9,000 lbs. (4082 kg) maximum capacity snatch block, and two 1"x 8' (25.4mm x 2.4m) tree trunk protectors and WARN winching gloves. It all comes in a heavyweight denier carry bag. PN 88915



TREE TRUNK PROTECTOR

1" x 8' (25mm x 2.4m) load strap. Rated to 6,400 lbs. (2903 kg) PN 88896

WINCH COVER

Made of durable, tight-fitting neoprene; resists water and cracking

PN 71980 ProVantage 2500 and 3500, Vantage 2000 and 3000, VRX 25 and 35, AXON 35 and 45RC

PN 71975 For ProVantage 3500 and 4500,

Vantage 4000, VRX 45, and AXON 45 and 55

WINCH HOOK BUMP STOP FOR POWERSPORTS WINCHES

• Extends the life of your WARN winch

- Prevents winch hook from bottoming out
- Prolongs hook and winch life
- Split design for easy installation
- Rubber construction
- PN 99944

REPLACEMENT CONTACTORS





Heavy Duty Contactor For VRX, ProVantage, and Vantage 4000/4000-S





PN 100995 **Standard Duty Contactor** For VRX 2500, 2500-S. 3500, 3500-S, 4500, and 4500-S

PN 89579



SNATCH BLOCK

Assists in double-lined and angled pulls. Rated for 4,500 lb. (2041 kg) winches and under. PN 88898

SHACKLE

For 4,500 lbs. (2041 kg) capacity winches and under. 1/2" (12.7mm) shackle with 5/8 (15.9mm) diameter pin. PN 88998

RECEIVER SHACKLE BRACKET

Utilizes a 1¹/₄" Class I receiver as a recovery or pulling point.

PN 62041 Includes bracket, hitch pin and shackle. PN 88998 Shackle only.







ILLUMINATED DASH ROCKER SWITCH KIT Illuminated dash-mounted switch is designed to operate your WARN winch. Kit includes illuminated dash-mounted switch, socket for corded remote, and all required wiring. PN 99897

REMOTE CONTROL REPLACEMENT AND UPGRADE KIT

PN 64259 Everything needed to add a hand-held remote control to your Vantage, ProVantage, and VRX winches. Includes remote control, socket, and wiring.

PN 64849 Replacement remote only. For Vantage, ProVantage, and VRX winches. Works with PN 64259 and PN 99897.

PN 100963 Everything needed to add a hand-held remote control to your AXON winch. Includes remote control, socket, and wiring.

PN 100964 Replacement remote only For AXON winches only.

WIRELESS CONTROL SYSTEM

- · Control your winch from up to 50' away
- Easy plug-and-play installation
- Sealed for protection against the elements
- Activation sequence guards against accidental power-ups
- Kit includes wireless transmitter, receiver, holster, lanyard and mounting hardware

PN 90288 For Powersports Winches. Works with WARN ProVantage, Vantage, and VRX winches.











EPIC HAWSE FAIRLEADS

Constructed of forged billet aluminum, with a hard anodized gunmetal finish. Designed with a large opening radius to help minimize rope wear. For use with synthetic rope only.

PN 100967 Epic Hawse Fairlead (short), replacement for AXON 35 and 45RC, upgrade for VRX 25 and 35, ProVantage 2500 and 3500, and Vantage 2000 and 3000 winch lines.

PN 100968 Epic Hawse Fairlead (long), replacement for AXON 45 and 55, upgrade for VRX 45, ProVantage 4500, and Vantage 4000 winch lines.



REPLACEMENT HAWSE FAIRLEADS

Designed to be used with synthetic rope, and to decrease the possibility of fraying. Replacements available for VRX, ProVantage and Vantage powersports winches.

PN 94244 Replacement fairlead for Vantage 4000-S. Cast aluminum construction with durable black powdercoat finish. 7.37" wide.

PN 94242 Replacement fairlead for Vantage 2000-S and 3000-S. Cast aluminum construction with durable black powdercoat finish. 6.25" wide.

ROLLER FAIRLEAD

Reduces excessive wear on your winch rope and aids in angled pulls



PN 28929 Replacement for VRX 25,

and Vantage 2000 and 3000 **PN 100965** Replacement for VRX 35 and AXON 35

PN 100966 Replacement for VRX 45, AXON 45 and 55, Vantage 4000

PN 69373 Replacement for ProVantage 2500 and 3500

PN 82550 Replacement for ProVantage 4500



SYNTHETIC ROPE EXTENSION

PN 69069

WINCH MOD ProVantage 2500 ProVantage 2500-s ProVantage 3500 ProVantage 3500-s ProVantage 4500 ProVantage 4500-s

Vantage 2000

Vantage 2000-s

Vantage 3000 Vantage 3000-s Vantage 4000 Vantage 4000-s VRX 25 VRX 25-S VRX 35 VRX 35-S VRX 45 VRX 45-S AXON 35 AXON 35-S AXON 45 AXON 45-S

AXON 45RC AXON 55 AXON 55-S

REPLACEMENT ROPE FOR POWERSPORTS WINCHES

Strong, lightweight, and easy-to-handle synthetic, or durable long lasting steel winch rope. Available in a variety of lengths and diameters. Synthetic ropes include sliding wear sleeve.

	ROPE INFORMATION		ROPE PART	NUMBERS
PART NUMBER	LENGTH	DIAMETER	WIRE	SYNTHETIC
90250	50' (15.2m)	3/16" (4.8 mm)	60076	
90251	50' (15.2m)	3/16" (4.8 mm)		73599
90350	50' (15.2m)	3/16" (4.8 mm)	60076	
90351	50' (15.2m)	3/16" (4.8 mm)		73599
90450	55' (15.2m)	7/32" (5.6 mm)	68851	
90451	55' (16.8m)	7/32" (5.6 mm)		77835
89020	50' (15.2m)	5/32" (3.9 mm)	89561	
89021	50' (15.2m)	5/32" (3.9 mm)		89563
89030	50' (15.2m)	3/16" (4.8 mm)	60076	
89031	50' (15.2m)	3/16" (4.8 mm)		73599
89040	55' (15.2m)	7/32" (5.6 mm)	68851	
89041	55' (16.8m)	7/32" (5.6mm)		77835
101025	50' (15.2m)	3/16" (4.8 mm)	60076	
101020	50' (15.2m)	3/16" (4.8 mm)		73599
101035	50' (15.2m)	7/32" (5.6 mm)	100972	
101030	50' (15.2m)	3/16" (4.8 mm)		73599
101045	50' (15.2m)	1/4" (6.35mm)	100973	
101040	50' (15.2m)	1/4" (6.35mm)		100975
101135	50' (15.2m)	7/32" (5.6 mm)	100972	
101130	50' (15.2m)	3/16" (4.8 mm)		73599
101145	50' (15.2m)	1/4" (6.35mm)	100973	
101140	50' (15.2m)	1/4" (6.35mm)		100975
101240	27' (8.23m)	1/4" (6.35mm)		100976
101155	50' (15.2m)	1/4" (6.35mm)	100973	
101150	50' (15.2m)	1/4" (6.35mm)		100975

SYNTHETIC ROPE CONVERSION KITS

For use with WARN Powersports winches with aluminum drums. All kits include synthetic rope, rock guard sleeve and fairlead.

PN 100969 Epic Hawse Fairlead (short) and 50' of Spydura synthetic rope for AXON 35 and 45RC, upgrade for VRX 25 and 35, ProVantage 2500 and 3500, and Vantage 2000 and 3000 winch lines.

PN 100970 Epic Hawse Fairlead (long) and 50' of Spydura synthetic rope for AXON 45 and 55, upgrade for VRX 45, ProVantage 4500, and Vantage 4000 winch lines.

PN 72128 For ProVantage 2500 and 3500, Vantage 2000 and 3000. Includes 50' of 3/16" diam. rope with roller fairlead

Includes lightweight 1/4" diameter rope, which attaches to the winch cable for an additional 50' of distance. 4,000 lb. single line capacity.





HOW TO ORDER You'll need three items:



ATV WITH A 1¼" RECEIVER:

- 1. Choose a VRX 25, VRX 35, AXON 35, or AXON 45RC winch.
- 2. Winch carrier designed to fit 1¹/₄" receiver. **PN 70925**
- 50 amp Quick Connect wiring kit for both front and back of vehicle. Includes 20" winch lead, 48" front battery lead and 96" rear battery lead. PN 70918

SIDE X SIDE WITH A 1¼" RECEIVER:

- 1. Choose a VRX 25, VRX 35, AXON 35, or AXON 45RC winch.
- 2. Winch carrier designed to fit 1¼" receiver. **PN 70925**
- 50 amp Quick Connect wiring kit for both front and back of vehicle. Includes 20" winch lead, 48" front battery lead, and 120" rear battery lead. PN 70928

SIDE X SIDE WITH A 2" RECEIVER:

- 1. Choose a VRX 45, AXON 45, or AXON 55 winch.
- 2. Winch carrier designed to fit 2" receiver. PN 70919
- 175 amp Quick Connect wiring kit for both front and back of vehicle. Includes 20" winch lead, 48" front battery lead, and 120" rear battery lead. PN 70920

ATV A WITH 2" RECEIVER:

- 1. Choose a VRX 25, VRX 35, AXON 35, or AXON 45RC
- 2. Winch carrier designed to fit 2" receiver. PN 70917
- 50 amp Quick Connect wiring kit for both front and back of vehicle. Includes 20" winch lead, 48" front battery lead, and 120" rear battery lead. PN 70928

MULTI-MOUNT PORTABLE WINCH SYSTEM FOR ATVS AND SIDE X SIDES

If your ATV or Side x Side has a 1¼" or 2" Class I front or rear receiver, then the Multi-Mount carrier is a versatile way to mount a WARN[®] winch. Plus, it allows you to quickly remove the winch whenever you want.

The Multi-Mount works by simply bolting a WARN winch to the carrier, installing the Quick Connect wiring kit, and inserting the carrier into the receiver.

MULTI-MOUNT ACCESSORIES AND REPLACEMENT PARTS

POWER LEADS WITH QUICK CONNECT PLUG

50 amp-for use with Powersports winches, 3500 lbs. capacity and less

PN 70939 (20" winch lead) PN 72886 (48" battery lead) PN 72888 (96" battery lead) PN 70927 (120" battery lead) PN 22681 (Quick Connect plugs only)

175 amp-for use with Powersports winches 4,000 lbs. capacity and higher

PN 36080 (28" winch lead) PN 70926 (48" battery lead) PN 26405 (90" battery lead) PN 70717 (120" battery lead) PN 22680 (Quick Connect plugs only)

Wiring Kit (for use with Powersports winches, 3500 lbs. capacity and less)

Designed for the Multi-Mount owner who wants to wire a second bike. Kit includes front and rear power leads with 50 amp Quick Connect plugs, remote control plug with wiring harness, electrical contactor and installation wires. **PN 64874**

STEEL RECEIVER SHACKLE BRACKET

Utilizes a 1¼" Class I receiver as a recovery or pulling point.

PN 62041 (Includes bracket, hitch pin and shackle).



Dust Caps For Quick Connect Plugs

PN 60917 for 50 amp plugs. **PN 69847** for 175 amp plugs.





WARN BUMPERS AND WINCH MOUNTING SYSTEMS: PUSH THE ENVELOPE AND RIDE WITH CONFIDENCE

Warn Industries means more than just winches. We manufacture a full line of mounting systems and bumpers engineered specifically to withstand the stresses encountered in winching operations and off-road driving. Built to fit your ATV or Side x Side and your lifestyle, these products have the durability you want and the rugged off-road functionality you need.



101 100

HONDA

WINCH MOUNTING SYSTEMS FOR ATVs AND SIDE X SIDES

WARN mounting systems are made to withstand the rigors of winching and the incredible forces that come with it. Plus, they have that just-right fit because they're designed and built with precision. Laser cut to the vehicle's exact dimensions, shaped on a computer controlled press brake, and robotically welded for consistent results. This application chart showcases the most current, in-production vehicles.




00

ATV WINCH MOUNTING KITS

YEAR	MODEL	WINCH MOUNTING KIT	VRX 25	VRX 35	VRX 45	AXON 35	AXON 45	AXON 55	AXON 45RC
CAN	I-AM/BRP					1			
16-18	Outlander 450 (DPS) (MAX) (MAX DPS)	Factory Installed Mount	•	•					
16-18	Outlander 450 (XT) (XT-P) (Mossy Oak SE) (North ED)	Factory Installed Winch	•	•					
16-18	Outlander Max 450 (DPS)	Factory Installed Mount	•	•					
16-18	Outlander L 570 (Mossy Oak Ed.)	Factory Installed Mount	•	•					
16-18	Outlander L 570 (DPS) (LE) (Max DPS)	Factory Installed Winch	•	•					
16-18	Outlander 570 (DPS) (Max DPS) (X) (MR)	Factory Installed Winch	•	•					
16-18	Outlander 570 (XT) (Mossy Oak Ed.) (North Ed.) (MAX XT)	Factory Installed Mount	•	•					
13-18	Outlander 650 (XT) (XT-P) (Mossy Oak Ed.) (North ED) (X) (MR)	Factory Installed Winch	•	•		•			•
13-18	Outlander 650 (DPS) (MAX DPS)	Factory Installed Mount	•	•		•			•
16-18	Outlander 650 6X6 (DPS)	Factory Installed Mount	•	•		•			•
16-18	Outlander 650 6X6 (XT)	Factory Installed Winch	•	•		•			•
15-18	Outlander 850 (DPS) (MAX) (MAX DPS)	Factory Installed Mount	•	•		•			•
16-18	Outlander 850 (MR) (X MR) (XT) (XT-XTP)	Factory Installed Winch	•	•		•			•
13-18	Outlander 1000 (R) (MAX) (XT) (X) (XT-P) (MR) (X MR)	Factory Installed Winch	•	•		•			•
16-18	Outlander 1000R 6X6 (XT)	Factory Installed Winch	•	•		•			•
16-18	Renegade 570 (XC) (X-XC)	89535	•	•					
16-18	Renegade 850 (R) (MAX) (XT) (X) (XT-P)	89535	•	•					
12-18	Renegade 850 (R) (MAX) (XT) (X) (XT-P)	89535	•	•					
HON	IDA								
14-18	Foreman TRX500 (FE) (ESE) (FM) (FPE) (FPM) 4x4	100380	•	•					
14	Rancher TRX420 (EPS) (FA) (FM) (FE) (FPE) (FPA) (FPM) 4x4	100380	•	•					
15-18	Rancher TRX420 (AT) (EPS) (FA) (FM) (FE) (FPE) (FPA) (FPM) 4x4	100380	•	•					
15-18	Rubicon TRX500 (FA) (FG) (FPA) 4x4	100380	•	•					
KAW	/ASAKI								
09-18	Brute Force 750	70207	•	•					
	ARIS								
17-18	ACE 500	100878	•	•		•			•
15-17	ACE 570	100878	•	•		•			•
16-18	ACE 900	100878	•	•		•			•
13-18	Scrambler XP 850 H.O.	100878	•	•		•			•
14-18	Scrambler XP 1000 H.O.	100878	•	•		•			•
16-18	Sportsman 450 H.O.	100878	•	•		•			•
15-18	Sportsman 570	100878	•	•		•			•
15-18	Sportsman 850	100878	•	•		•			•
15-18	Sportsman 850 Highlifter Edition	Factory Installed Winch	•	•		•			•
15-18	Sportsman 1000	100878	•	•		•			•
15-18	Sportsman 1000 Highlifter Edition, Hunter Special Edition	Factory Installed Winch	•	•		•			•
15-18	Sportsman 1000 Touring	100878	•	•		•			•
SUZ									
08-18	King Quad 400 (AS) (FS) (I) (Camo) (Special Edition)	83130	•	•					
08-18	King Quad 500 AXi (PS) (Camo) (Special Edition)	70326	•	•					
08-18	King Quad 750 (Axi) (PS) (Camo) (Special Edition) 4X4	70326	•	•					
	TRON/ARCTIC CAT								
16-17	Alterra 400	96939	•	•	•				
17-18	Alterra 500	101612	•	•	•				
15-18	Alterra 700 (TRV) (VLX) (XT) (Mud Pro)	Factory Installed Mount	•	•	•				
17	Alterra 1000 TRV	Factory Installed Mount	•	•	•				
12-17	700 (GT)(GT LTD)(Mud Pro)(Mud Pro LTD)(LTD)(XT)	Factory Installed Mount	•	•	•				
12-17	700 (TBX)(TRV LTD)(TRV XT)(TBX SE)(TRV SE)	Factory Installed Mount	•	•	•				
15-17	700 (XR)(XR LTD)(XR XT)(ALT)(ALT XT)	Factory Installed Mount	•	•	•				
16-18	Grizzly 700	95740	•	•		•			•
18	Kodiak 450	90850	•	•					
16-18	Kodiak 700	95740	•	•		•	1		•

SIDE X SIDE WINCH MOUNTING KITS

YEAR	MODEL	WINCH MOUNTING KIT	VRX 25	VRX 35	VRX 45	AXON 35	AXON 45	AXON 55	AXON 45RC
	I-AM/BRP								
11-18	Commander 800 (R) (X) (XT) (DPS) (XT-P) (LTD) (MAX) (MAX XT) (MAX LTD) (Mossy Oak Ed.)	85810	•	•	•	•	•	•	•
15-18	Commander 800R (DPS) (MAX DPS)	85810	•	•	•	•	•	•	•
11-18	Commander 1000 (R) (X) (DPS) (XT-P) (LTD) (MAX)	85810	•	•	•	•	•	•	•
13-18	Maverick 1000 (X RS) (DPS) (XC) (X XC) (X MR) (X DS) (TURBO (MAX)	92145			•		•	•	
17-18	Maverick Trail (DPS)	101434			•				
17-18	Maverick X3 (R) (X DS) (X RS) (MAX) (MAX X DS) (MAX X RS)	101394	•	•	•	•	•	•	•
16-18 16-18	Defender (DPS) (XT-P)* Defender (XT) (Mossy Oak Ed.) (MAX-XT) (LONE STAR MAX)*	Factory Installed Mount Factory Installed Mount			•		•	•	
18	Defender X MR*	Factory Installed Mount							
HON									1
15-18	Pioneer 500	93720	•	•		•			•
14-18	Pioneer 700 (Deluxe)	101260	•	•	•	•			•
16-18	Pioneer 1000 (EPS) (LE) (Deluxe)	93790	•	•	•	•	•	•	•
JOH	IN DEERE		I		1				
18	835 XUV (E)(M)(R)	101688			•		•	•	
18	865 XUV (E)(M)(R)	101688			•		•	•	
	VASAKI								
10-18	Mule 4000 (Trans)	80586	•	•				1	
09-18	Mule 4010 (Trans) (Diesel) (SE)	80586	•	•					
15-18	Mule PRO(FX) (FXT) (DX) (DXT)	94510	•	•					
17-18	Mule SX (4x4) (4x4 SE) (4x4 XC) (4x4 XC SE)	94580	•	•		•			•
14-18	Тегух	93414*	•	•					
14-18	Teryx 4	93414*	•	•					
*Not com	patible with WARN bumper								
	АНА								
16-18	Wolverine	95350	•	•					
18	Wolverine X4	90845	•	•	•	•			•
15-18 16-18	Viking YXZ1000	92158 101510	•	•	•	•	•	•	•
		טוכוטו	•	•					
16-18	General 1000 (4)	92332	•	•	1	•	1		
16-18	General 1000 (Deluxe) (Premium) (Limited) (Ride Command)	Factory Installed Mount	•			•			•
17-18	Ranger 500	90459	•	•		•			•
15-18	Ranger 570 Mid-size	90459	•	•		•			•
15-18	Ranger 570 Full-size	See Note*	•	•	•	•	•	•	•
13-18	Ranger 900	90930	•	•	•	•	•	•	•
18	Ranger 1000 (Crew)	90930	•	•	•	•	•	•	•
15-18 15-18	Ranger EV	90459 90930				•			•
12-18	Ranger Diesel RZR 570	80335			-				
15-18	RZR 900 (XP) (EPS) (LE) (S) (4)	92332							•
14-18	RZR 1000 (XP) (EPS) (LE) (S) (4) (Turbo) (4 Turbo)	92332	•	•		•			•
	570 Full Size model has a number of chassis variations. If vehicle has radiat		ehicle has 2 threa	ded holes on t	he front of t	he chassis dire	ctly below the	radiator, use	90930.
TEX	TRON/ARCTIC CAT								
16-17	500 HDX (XT)	Factory Installed Mount	•	•	•			1	
17-18	Prowler 500	101316	•	•	•	•	•	•	•
16-17	700 HDX (XT EPS) (SE) (XT) (Crew)	Factory Installed Mount	•	•	•				
15-17	Prowler 700 (XT)	Factory Installed Mount	•	•	•				
15-17	Prowler 1000 (XT EPS)	Factory Installed Mount	•	•	•				
18	Stampede*	Factory Installed Mount			•				
18 17 15	Havoc* Wildcat 1000 (LTD)	Factory Installed Mount 89050			•				
12-15 13-17	Wildcat (DUU (LTD) Wildcat (X) (4X) (4 LTD) (4) (X LTD) (4X LTD) (EPS)	89050						•	
15-17	Wildcat Sport (LTD EPS) (XT)	Factory Installed Mount	•	•	-			•	
15-17	Wildcat Trail (LTD EPS) (XT) (SE) (LTD)	Factory Installed Mount							
15-1/			•	•			•	•	

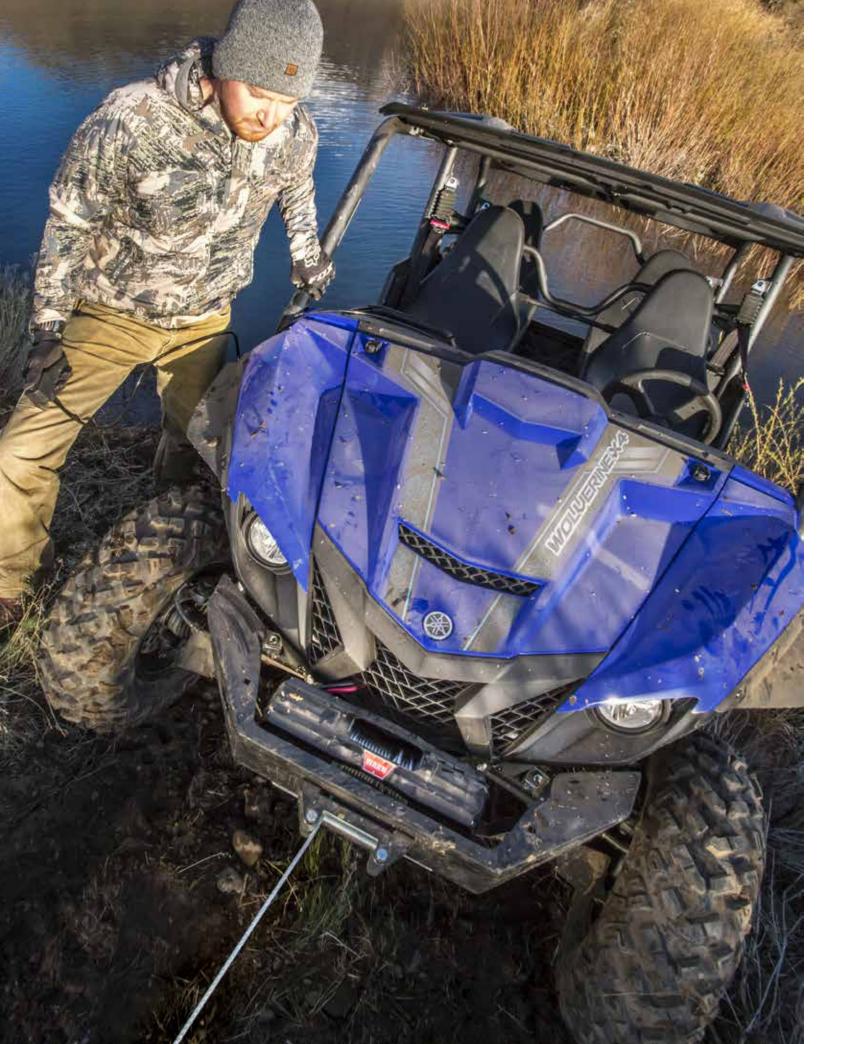



WARN BUMPERS TRAIL PROTECTION AND A BOLD, CUSTOMIZED LOOK

Our bumpers feature the style, durability, and functionality you're looking for. Hard-wearing steel construction. Durable powdercoated finishes that resist corrosion and stand up to



PN 101712 2018 YAMAHA WOLVERINE X4

PN 101700 2016-18 HONDA PIONEER 1000

408 hour salt spray testing. Winch mount is integrated for hardcore recovery duty. We design these bumpers for years of troublefree use because we know they'll be pushed to the limits.

PN 101690 2018 POLARIS RZR XP TURBO S

WARN PLOWS FOR ATVS AND SIDE X SIDES: HEAVY GAUGE, HEAVYWEIGHT HITTERS THAT PUSH THE LIMITS

HONDA

WARN

Whether you're plowing a snow-clogged driveway in Idaho, or pushing animal feed in Iowa, WARN plows stand up to rugged use as only WARN products can.

For ATVs, choose from WARN ProVantage or Standard Plow Systems. With ProVantage you get the highest performance, exceptional control, and outstanding durability – plus the choice of a front or center mounting option. For lighter-duty, intermittent use there's the WARN Standard Plow System. This center-mount plow system delivers reliable, workhorse performance at a very reasonable price.


Side X Side owners can equip their vehicle for snow season with the WARN ProVantage Plow System for Side X Sides. With rapid front connection, durable construction, and top quality, it's engineered to perform. And with a variety of useful, innovative accessories, it's the most complete plow system money can buy.



WARN PROVANTAGE PLOW SYSTEM FOR ATVS

HIGH PERFORMANCE, EXCEPTIONAL CONTROL, AND OUTSTANDING DURABILITY

The stable, wide plow bases and durable, extra-large plow skids deliver exceptional performance.



CHOICE OF FRONT OR CENTER MOUNT DESIGN

Made from thick-gauge steel with reinforcing ribs, a center cross member, and a sturdy boxed design.

Long-lasting, large diameter pivot assemblies rotate the blade smoothly, precisely, and reliably, for years of service.





ORDER YOUR ATV PLOW MOUNTING PLATE Mounting plates vary by ATV make and model (see app chart for part number).






CHOOSE YOUR PLOW BLADE RAISING MECHANISM

Winch or ProVantage Plow Lift.


PROVANTAGE FRONT-MOUNT ATV PLOW SYSTEM

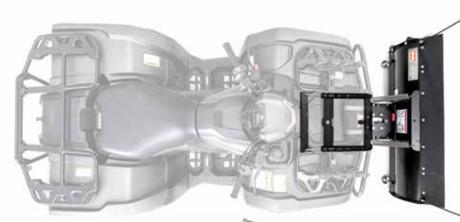


Front-Connection Advantages:

- Easy-on, easy-off rapid connection system is located at the front of the vehicle-no need to crawl under the ATV
- No need to remove mount during non-plowing seasons; no reduction in ground clearance
- Front-mount systems offer the highest blade lifting capability



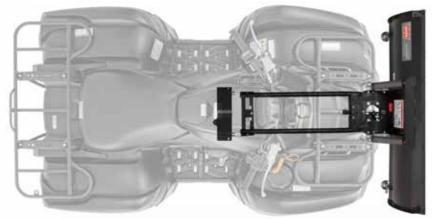

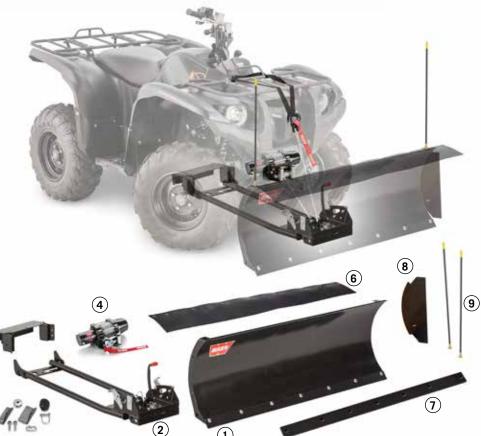



1 Straight Plow Blade* **PN 78950** 50" Blade PN 78954 54" Blade PN 78960 60" Blade

3

5

- **(2)** Plow Base/Push Tube Assembly (front mount) PN 92100
- (3) Plow mounting kit See application charts for part numbers

* Tapered blade is also compatible with the front-mount system: PN 80954 (54"), PN 80960 (60")

(2)

(4) WARN winch (Optional. Choose from winch or Plow Lift)

(1)

6

- **(5)** Plow HD Mounting (Optional part. Increase the durability of your mounting points) PN 85243 (Standard mount) PN 85244 (Offset mount)
- 6 Plow HD Wear Bar (Optional. Wear-form steel construction lasts up to 30% longer) **PN 84054** 54" PN 84060 60"
- Blade Side Wall $(\mathbf{7})$ Control snow run off)

(8) Plow Markers (Optional. 2' high antenna) PN 67679

(7)

(8)

(Optional. For tapered blade. PN 80607

PN 78960 60" Blade

1 Straight Plow Blade* PN 78950 50" Blade PN 78954 54" Blade

(4) WARN winch (Optional, Choose from winch or Plow Lift) **(5)** Plow Pulley

 $(\mathbf{2})$ Plow Base/Push Tube Assembly (center mount) PN 78100

(3) Plow mounting kit See application charts for part numbers

advantage) PN 84526

(Optional. Provides better control of

plow blade by doubling the lifting

* Tapered blade is also compatible with the center-mount system: PN 80954 (54"), PN 80960 (60")

Center-Connection Advantages:

- Center-mount adds rigidity and extra stability to the ATV during plowing operations
- Designed for high ground clearance and quick installation or removal

- 6 Snow Control Flap (Optional. Controls snow kick back) PN 67870
- **(7)** Plow HD Wear Bar (Optional. Wear-form steel construction lasts up to 30% longer)
 - PN 84050 (50") PN 84054 (54") PN 84060 (60")
- (8) Blade Side Wall (Optional. For straight blade. Control snow run off) PN 80607

Plow Markers

(9) (Optional. 2' high antenna) PN 67679

PLOWS 39

WARN STANDARD PLOW SYSTEM FOR ATVS

Reliable Performance at a **Very Competitive Price**



Optional Accessories and Upgrades For Your Standard Plow System



Snow Control Flap Flexible rubber top flap controls snow (cut to size) PN 67870 (60")

PN 80607

Blade Side Wall

Control run off of snow

Made of heavy duty steel

and other materials.

Plow Markers 2' high antenna PN 67679



Plow Lift Rope 8' of durable synthetic rope. Temporarily replaces your wire rope for plow season and saves wear and tear PN 68560



Plow Skids For Standard straight blade PN 69212



Roller Fairlead For Plow Lifting Larger diameter roller reduces wear on rope

> PN 69373 (fits WARN ATV winches 2000-3500 lbs)



Plastic Wear Bar Excellent on concrete/brick PN 67860 (48") PN 67861 (54") PN 67862 (60")

Steel Wear Bar Replacement part for standard steel wear bar PN 39416 (48") PN 39415 (54")

PROVANTAGE SIDE X SIDE PLOW SYSTEM



Optional Accessories and Upgrades For Your Side X Side Plow System

Plow Markers 2' high antenna PN 67679

Blade Side Wall

PN 80607

Control snow run off



Plow Lift Rope 8' of durable synthetic rope. Temporarily replaces your wire rope

for plow season and saves wear and tear PN 68560



Plow HD Skids

by up to 30%

Plow Slack Control • Extend the life of your plow system and winch rope

 Eliminates winch overrun when lowering the plow (also corrects cable tangles) PN 85888 (for UTV)

PN 62601 (60")

40 PLOWS

Rapid Connection, Durable Construction, and Top Quality

Get your Side x Side ready for plowing with the WARN ProVantage Plow System. The system has been engineered from the ground up and extensively tested to give the product years of service, so you and your vehicle can plow season after season.

> The ProVantage Side x Side Plow System has the same rapid connection system as the ATV system, but it uses a big Side x Side specific plow blade to move material. Just add the Side x Side plow base, a winch, pick your accessories of choice, and you're ready to get to work.

TO BUILD YOUR SYSTEM, YOU WILL NEED THESE FOUR PARTS:

- (1) 72" Straight Plow Blade PN 79958 66" Straight Plow Blade PN 90695
- (2) Plow Base/Push Tube Assembly (includes pulley kit) PN 79805
- (3) Plow mounting kit See application charts for part numbers
- (4) WARN winch



- Wear-form steel construction Outlast standard skids
- PN 85368 for 72" blade



Plow Limit Control • Extends plow system life

• Protects your vehicle from impact and stops "over raised" conditions Allows you to fine tune system for a variety of stop positions PN 85950 for UTV



Plow HD Wear Bar

- Wear-form steel construction
- Lasts up to 30% longer than standard wear bars PN 85287 (72")

Steel Wear Bar Replacement part for standard steel wear bar PN 72047 (72")

Roller Fairlead For Plow Lifting

Larger diameter roller reduces wear on rope PN 82550 (fits WARN winches 4000-4500 lbs)

PLOWS 41

PARTS AND ACCESSORIES FOR PLOW SYSTEMS



PROVANTAGE ATV TAPERED PLOW BLADE

- Tapered design with aggressively curved profile to move snow or dirt up and away from the surface vou're clearing.
- Made from thick 11-gauge steel with extra-heavy ribbing for added rigidity. Boxed design adds further support.
- Special low-friction powder-coated finish helps keep material from sticking to the blade.
- Available in 54" and 60" widths.
- Thick, sturdy wear bar has steep angle of attack for maximum surface scraping.

Effortlessly lifts your plow without needing to use your

install. Works with all WARN plow systems, new or old.

1

(3)

winch. Screw-drive system is compact and easy to

PN 80954 54" Tapered Blade PN 80960 60" Tapered Blade

PLOW LIFT

PN 84600

PROVANTAGE ATV STRAIGHT PLOW BLADE

- Made from thick 12-gauge steel with heavy-duty ribbing and a center cross member for added rigidity. Boxed design adds extra support.
- Special low-friction powder-coated finish helps keep material from sticking to the blade.
- Available in 50". 54". and 60" widths.
- 54" and 60" blades have top lips with pre-drilled holes for accessories.
- 17³/₄" blade height.
- Thick, sturdy wear bar has steep angle of attack for maximum surface scraping.
- **PN 78950** 50" Blade (14-gauge, no top lip, 16³/₄" height) PN 78954 54" Blade PN 78960 60" Blade



PROVANTAGE ATV BASE/PUSH TUBE ASSEMBLY

Choose from front or center-mount options. The extra-wide design gives increased stability and durability. A forward trip system and interlocked rotating base plate deliver strength, durability, and impact resistance.

PN 92100 Front mount PN 78100 Center mount

FRONT OR CENTER MOUNTING KIT

- Kits are engineered to fit specific vehicle makes and models.
- Choose from front or center-mount options.
- Front-mount allows for rapid connection. Easy-on, easy-off thanks to self-locating pin design. No need to crawl under the vehicle. No reduction in ground clearance.
- Center-mount plate remains attached to the ATV and becomes a structural component adding rigidity to the ATV during plowing operations. Designed for high ground clearance and quick installation or removal of push-tube assembly.

See application listing for part numbers



For use with winches that raise and lower a plow blade. Larger diameter roller reduces

PN 69373 fits WARN winches 2000-3500 lbs., and AXON 45RC

ATV PROVANTAGE SNOW PLOW STRAP


- Durable strap replaces winch rope for plow lifting duties
- Wide design reduces wear and tear on roller fairleads

• Works with both roller and hawse fairleads • Fits all WARN ProVantage ATV snow plow applications

PN 99946







PLOW HD WEAR BAR

 Wear-form steel construction. • Lasts up to 30% longer than standard wear bars. PN 84050 (50")

Made of ultra-high molecular weight plastic (UHMW). Excellent on concrete/brick. PN 80860 (50")

PROVANTAGE UPGRADES: INCREASE THE DURABILITY AND PERFORMANCE OF YOUR SYSTEM



PLOW SLACK CONTROL

PN 85742 ATV (Plow only)



PLOW HD MOUNTING

- Upgrade mounting points
 - Wear-form steel construction.
- Increase the durability of your mounting points.

PN 67862 (60")

- For front-mount plow only.
- PN 85243 ATV (Standard mount) PN 85244 ATV (Offset mount)

42 PLOWS



These 2' high antenna have red rubber tips for visibility; great for use in deep snow. PN 67679

2. BLADE SIDE WALL

Control run off and get scoop-like control of snow and other materials. Helps to gather material before depositing. Made of heavy duty steel. PN 80607 Straight blades. Can be mounted on either side PN 70880 Tapered blades

3. SNOW CONTROL FLAP

Made of flexible rubber, this top flap controls snow kick back and keeps snow on the ground. Fits all WARN ATV plows (cut to size). PN 67870 (60")



wear on rope.

PN 82550 fits WARN winches 4000-5500 lbs.








PN 67861 (54")



• Extend the life of your plow system and winch rope.



PN 84054 (54") PN 84060 (60")



UNIVERSAL PLOW MOUNT

This versatile non-vehicle-specific plow mount will transform almost any ATV into a plow-ready machine. Compatible with both WARN ProVantage and Standard center-mount push tubes, the Universal Plow Mount provides stability and versatility. Constructed from steel and wearing a durable powdercoated finish, this mount is ideal for seasonal duty and easily attaches to a majority of ATVs.

PLOW LIFT ROPE

Uses 8' section of durable synthetic rope. Temporarily replaces your wire rope for plow season and saves wear



and tear. Stands up to repeated, sharp angle pulls used to lift heavy plow blade.

PN 68560

- Center mounting position for reliable and versatile plow performance
- Low-profile design provides minimal clearance issues
- Ideal for seasonal use
- Includes mounting hardware

PN 91810



STEEL WEAR BAR Replacement part for

standard steel wear bar.

PN 80608 (50") PN 39415 (54") PN 62601 (60")



PLOW SKIDS

For ProVantage straight and tapered blade.

PN 80475 (for 54" and 60" blades) PN 69212

(for 50" blade)



PLOW HD SKIDS

• Wear-form steel construction.

 Outlast standard skids by up to 30%.

PN 85368

(for ProVantage 54" and 60" blades. Not for use with 50" blade)



PLOW LIMIT CONTROL

- Extends plow system life
- Protects your vehicle from impact and stops "over raised" conditions.
- Allows you to fine tune system for a variety of stop positions.
- For front-mount plow only.

PN 85950

ATV and UTV plows PN 88950 Combo limit-slack control (plow only)



PLOW PULLEY

- Provides better control of plow blade by doubling the lifting advantage, slowing blade movement. and repositioning the lift point.
- Contributes to longer rope life by reducing load and bend over angle.

PN 84526 ATV (Plow Only)

Note: Plow Pulley Kit is not compatible with WARN Plow Lift

FRONT PLOW MOUNTS FOR SIDE X SIDEs

	YEAR	MODEL	FRONT PLOW MOUNTING KIT				
	CAN-AM	/BRP					
	11-18	Commander 800 (R) (X) (XT) (DPS) (XT-P) (LTD) (MAX) (MAX XT) (MAX LTD) (Mossy Oak Ed.)	85690				
	11-18	Commander 1000 (R) (X) (DPS) (XT-P) (LTD) (MAX)	85690				
	13-18	Maverick 1000 (X RS) (DPS) (XC) (X XC) (X MR) (X DS) (TURBO (MAX)	91255				
	16-18	Defender (DPS) (XT-P)	95850				
	16-18	Defender (XT) (Mossy Oak Ed.) (MAX-XT) (LONE STAR MAX)	95850				
* DI	HONDA						
* Plow mount must use Front Mount ATV base/tube	15-18	Pioneer 500	93730*				
assembly (Warn PN 92100)	14-18	Pioneer 700 (Deluxe)	93954				
and ATV blade	16-18	Pioneer 1000 (EPS) (LE) (Deluxe)	93820				
	08-13	Big Red (MUV700)	80913				
	KAWASA	~					
Plow mount must use Front Mount ATV base/tube	10-18	Mule 4000 (Trans)	83503				
assembly (Warn PN 92100)	09-18	Mule 4010 (Trans) (Diesel) (SE)	83503				
and ATV blade	15-18	Mule PRO(FX) (FXT) (DX) (DXT)	95370				
	17-18	Mule SX (4x4) (4x4 SE) (4x4 XC) (4x4 XC SE)	96990				
	14-18	Teryx	88330				
	14-18	Teryx 4	88330				
	08-16	Mule 600	84090*				
	05-16	Mule 610 (XC)	84090*				
	08-13	Teryx 750 (FI) (LE) (Camo) (Sport) (SGE)	79925				
	12-13	Teryx 4 750 (EPS) (LE) (Camo)	88330				
	14-18	Teryx 4	88330				
	09	UXV500 (i)(Camo)(IRS)(G)(G Turf)	86386				
	10-13 14-17	UXV500 (i)(LE)(SE) UXV500i (LE)(HE)(TURF)(Camo)(50th Anniversary) (EPS)	86386 86386				
	L		00000				
Plow mount must use Center	POLARIS 17-18	ACE 500	95848*				
Mount ATV base/tube	15-17	ACE 570	95848*				
assembly (Warn PN 78100)	16-18	ACE 900	95848*				
and ATV blade	16-18	General 1000 (4)	97340				
* Plow mount must use Front	16-18	General 1000 (Premium) (Limited) (Ride Command)	97340				
Mount ATV base/tube assembly (Warn PN 92100)	17-18	Ranger 500	90546				
and ATV blade	15-18	Ranger 570 Mid-size (Crew)	90546				
** Must be Revision A1 for	15-18	Ranger 570 Full-size (Crew)	90924				
2012 application	13-18	Ranger 900 (Crew)	90924				
	18	Ranger 1000 (Crew)	90924				
	15-18	Ranger EV	90546				
	15-18	Ranger Diesel	90924				
	12-18	RZR 570	80681**				
	15-18	RZR 900 (XP) (EPS) (LE) (S) (4)	97084**				
	14-18	RZR 1000 (XP) (EPS) (LE) (S) (4) (Turbo) (4 Turbo)	97084**				
	10-14	Ranger 400 Midsize 4x4 (Crew)	90546				
	08	Ranger 500 4X4	81580				
	09	Ranger 500 4X4 (Crew)	79700				
	08	Ranger 700	81580				
	09	Ranger 700 (Crew)	81580				
	09	Ranger 700 (HD) (HP)	79700				
	08-09	Ranger 700 6X6	81580				
	10-15	Ranger 800 (XP) (SP) (EPS) (Crew) (HD)	79700***				
	12-15	Ranger 800 Midsize	90546				
	10-16	Ranger 800 6x6	79700				
	16	Ranger 900 Highlifter Edition	90924				
	11-14	Ranger Diesel	79700				
	08-14	RZR 800 (S) (EPS) (LE) (4)	80681**				

FRONT PLOW MOUNTS FOR SIDE X SIDEs

YEAR	MODEL	FRONT PLOW MOUNTING KIT
TEVT	RON/ARCTIC CAT	
16-17	500 HDX (XT)	97420
17-18	Prowler 500	97420
16-17	700 HDX (XT EPS) (SE) (XT) (Crew)	97420
15-17	Prowler 700 (XT)	97420
15-17	Prowler 1000 (XT EPS)	97420
12-15	Wildcat 1000 (LTD)	N/A
15-17	Wildcat Sport (LTD EPS) (XT)	97215*
15-17	Wildcat Trail (LTD EPS) (XT) (SE) (LTD)	97215*
09-14	Prowler 550 XT	83875
14-15	Prowler 500 (HDX) (HDX LTD) (HDX XT)	83875
15-16	Prowler 550 (XT)	97420
06-09	Prowler 650 H1 XT	83875
09-15	Prowler 700 (XT) (XTX) (LE) (HDX) (HDX XT EPS)	83875
09-14	Prowler 1000 XTZ 4X4	83875
YAMA		
16-18	Wolverine	95475
18	Wolverine X4	90865
15-18	Viking	92156
07-09	Rhino 450	79815*
03-07	Rhino 660	79815*
08-13	Rhino 700	79815*

* Plow mount must use Front Mount ATV base/tube assembly (Warn PN 92100) and ATV blade

* Fits 4000-4500 series winches only

FRONT AND CENTER PLOW MOUNTS FOR ATVs

YEAR	MODEL	CENTER PLOW MOUNTING KIT	FRONT PLOW MOUNTING KIT
CAN 16-18	Outlander 450 (DPS) (MAX) (MAX DPS)	89613	97130
16-18	Outlander 450 (DF3) (MAX) (MAX DF3) Outlander 450 (XT) (XT-P) (Mossy Oak SE) (North ED)	89613	97130
16-18	Outlander Max 450 (DPS)	89613	97130
16-18	Outlander L 570 (Mossy Oak Ed.)	89613	97130
16-18	Outlander L 570 (DPS) (LE) (Max DPS)	89613	97130
16-18	Outlander 570 (DPS) (Max DPS) (X) (MR)	89613	97130
16-18	Outlander 570 (XT) (Mossy Oak Ed.) (North Ed.) (MAX XT)	89613	97130
13-18	Outlander 650 (XT) (XT-P) (Mossy Oak Ed.) (North ED) (X) (MR)	89613	95840
13-18	Outlander 650 (DPS) (MAX DPS)	89613	95840
16-18	Outlander 650 6X6 (DPS)		95840
16-18	Outlander 650 6X6 (XT)		95840
15-18	Outlander 850 (DPS) (MAX) (MAX DPS)	89613	95840
16-18	Outlander 850 (MR) (X MR) (XT) (XT-XTP)	89613	95840
13-18	Outlander 1000 (R) (MAX) (XT) (X) (XT-P) (MR) (X MR)	89613	95840
16-18	Outlander 1000R 6X6 (XT)		95840
16-18	Renegade 570 (XC) (X-XC)	89613	
16-18	Renegade 850 (R) (MAX) (XT) (X) (XT-P)	89613	
12-18	Renegade 850 (R) (MAX) (XT) (X) (XT-P)	89613	
03-05	Outlander 330 (2X4) (4X4) (MAX)	67945	
03-04	Outlander 400 (2X4) (4X4) (XT)	67945	
03-06	Outlander 400 MAX	67945	
05-06	Outlander 400 (XT) (MAX XT)	67945	
06	Outlander 400 (MAX)	72504	79234
07-15	Outlander 400 (XT) (MAX XT)	72504	79234
15-16	Outlander L 450 (DPS) (Max DPS) (XT)	89613	97130
07-08	Outlander 500 MAX	72504	79234
07-12	Outlander 500 MAX XT (LTD)	72504	79234
13-14	Outlander 500 MAX XT (LTD)	89613	97130
15	Outlander L 500 (DPS)	89613	97130
06-07	Outlander 650 (XT) (MAX XT)	72504	79234
06-12	Outlander 650 (R) (MAX) (MR) (DPS) (LTD)	72504	79234
08-12 06-08	Outlander 650 (MAX XT) (XT-P)	72504 72504	79234 79234
08-08	Outlander 800 (MAX) Outlander 800 (R) (MAX) (MR) (DPS) (LTD)	72504	79234
08-12	Outlander 800 (K) (MAX) (MK) (DF3) (LTD)	72504	79234
13-16	Outlander 800 (R) (MAX) (XT) (X) (XT-P) (MR)	89613	95840
16	Outlander 1000R (DPS) (XT)	89613	95840
16	Outlander 1000R (XT-P) (MAX ST) (MAX XP-Pa) (MAX LTD)	89613	95840
12-16	Renegade 500 (R) (MAX) (XT) (X) (XT-P)	89613	55640
12-16	Renegade 800 (R) (MAX) (XT) (X) (XT-P)	89613	
HON			
14-18	Foreman TRX500 (FE) (ESE) (FM) (FPE) (FPM) 4x4	93901	93515
14-10	Rancher TRX420 (EPS) (FA) (FM) (FE) (FPE) (FPA) (FPM) 4x4	93901	93515
14 15-18	Rancher TRX420 (AT) (EPS) (FA) (FM) (FE) (FFE) (FPA) (FPM) 4x4	93901	93515
15-18	Rubicon TRX500 (FA) (FG) (FPA) 4x4	93901	93515
93-00	Foretrax 300 (TRX300FW) 4X4	37850	
95-03	Foreman (TRX400FW) 4X4	37851	
98-04	Foreman TRX450 4X4 (S) (ES) (FM) (FE)	37852	
05-06	Foreman TRX500 (TM) (FE) 2X4 4X4	70583	80554
07-11	Foreman TRX500 (FM) (FPM) (ES) (FE) (FPE) (TM) (2x4) (4X4)	70583	80554
12-13	Foreman TRX500 (FE) (ESE) (FM) (FPE) (FPM) 4x4	87686	87190
00-06	Rancher TRX350 (TM) (ES) (TE) 2X4	63290	
00-06	Rancher TRX350 (FM) (ES) (FE) 4X4	63290	
04-07	Rancher AT TRX400 (FA) (FG) (FGA) (GPScape) 4x4	63290	
07-13	Rancher TRX420 (TM) (TE) 2X4	87686	
07-13	Rancher TRX420 (AT) (FM) (EPS) (FE) (FPE) (FPA) (FPM) 4x4	87686	80031
14	Rancher TRX420 (AT)	87686	80031
03-05	Rincon TRX650 (FA) 4X4	65070	79673
06-14	Rincon TRX680 (FGA) (FA) (GPScape) 4X4	65070	79673
00-04	Rubicon (TRX500FA) 4X4	61611	
05-06	Rubicon TRX500 (FA) (FG) 4x4	70583	80554
07-09	Rubicon GPScape TRX500FGA 4X4	70583	80554
07-14	Rubicon TRX500 (FA) (FG) (FPA) 4x4	70583	80554

FRONT AND CENTER PLOW MOUNTS FOR ATVs

YEAR	MODEL
13-14	Gator XUV 550
KAW	/ASAKI
09-18	Brute Force 750
05-13	Brute Force 650
05-13	Brute Force 650
06-08	Brute Force 750
02-13	Prairie 360
01-03	Prairie 650 Twin
04-06	Prairie 700
KLE	
12-17	RTV400ci
08-18	RTV500
12-17	RTV 900
KYN	ICO
09-13	MXU 375
12-17	MXU 450i 4x4 (EFI)(LE)(Camo)(50th)
07-12	MXU 500 (i)
POL	ARIS
14-16	ACE 325
16-18	Sportsman 450 H.O.
15-18	Sportsman 570
15-18	Sportsman 850
15-18	Sportsman 850 Highlifter Edition
15-18	Sportsman 1000
15-18	Sportsman 1000 Highlifter Edition, Hunter Special Edition
15-18	Sportsman 1000 Touring
08-10	Sportsman 300
98-00 15	Sportsman 335
15 01-03	Sportsman 350 EXT Sportsman 400
04-07	Sportsman 400
08-10	Sportsman 400 H.O.
11-14	Sportsman 400 H.O.
96-03	Sportsman 500
04-07	Sportsman 500
08-10	Sportsman 500 H.O.
08-11	Sportsman 500 (Touring) (X2)
11-16	Sportsman 500 H.O. (Touring)
10-14	Sportsman 550 (EPS) (XP) (X2)
14	Sportsman 570
14	Sportsman 570 X2
03	Sportsman 600
04-05	Sportsman 600
02-03 04-07	Sportsman 700 Sportsman 700
04-07	Sportsman 700 Sportsman 700 X2
05-10	Sportsman 700 AZ
07-08	Sportsman 800 X2
09	Sportsman 800 Big Boss 6X6
11-13	Sportsman 800
11-13	Sportsman 800 Big Boss 6X6
09-14	Sportsman 850 XP
10-14	Sportsman 850 Touring
11	Sportsman 850 X2

CENTER PLOW MOUNTING KIT	FRONT PLOW MOUNTING KIT	
MOUNTING KIT	MOUNTING KIT	
	93533	
70558	80360	* Plow mount must use Front Mount base/ tube assembly (Warn PN 92
62686	81922	and ATV blade
70558	82530	
70558	82530*	
62686	80556	
62686		
62686		
1	02050*	* Plow mount must use Front
	83650*	Mount ATV base/ tube
	83650*	assembly (Warn PN 92100)
	91490	and ATV blade
04020		
84820	22005	
0000	88085	
86680	86142	
		* Kits much be multilere DD for mild OF
95848	96460	* Kit must be revision B2 for mid-05 and later
94644	100960	**Will not work with "Demand Drive"
94644	100960	front differential
80260	100960	pone appendia
80260	100960	
80260	100960	
80260	100960	
	100960	
79018	83170	
37843		
94644	95160	
37843		
37843*		
79018	83170	
87355	91280	
37843		
37843*	83110**	
37843	83110**	
87355	05110	
87355	91280	
80260	80545	
94644	94765	
34044	94765	
63936	54705	
63936	70500	
63936	79608	
63936	79608	
78395	70500	
78395	79608	
78395		
	79608	
87355	91280	
	91280	
80260	80545	
80260	80545	
	80545	

PLOWS 47

FRONT AND CENTER PLOW MOUNTS FOR ATVs

YEAR	MODEL	CENTER PLOW MOUNTING KIT	FRONT PLOW MOUNTING KIT		
TEXTRON/ARCTIC CAT					
16-17	Alterra 400	85260	96970		
17-18	Alterra 500	85260	96970		
15-18	Alterra 700 (TRV) (VLX) (XT) (Mud Pro)	63294	97596		
17	Alterra 1000 TRV	63294	84354		
12-17	700 (GT)(GT LTD)(Mud Pro)(Mud Pro LTD)(LTD)(XT)	63294	84354		
12-17	700 (TBX)(TRV LTD)(TRV XT)(TBX SE)(TRV SE)	63294	84354		
15-17	700 (XR)(XR LTD)(XR XT)(ALT)(ALT XT)	63294	97596		
08-12	350	85260			
08-12	366 Automatic	85260			
02	375 Automatic (2X4) (4X4)	63294	84354		
02	400 i (2X4) (4X4)	63294	84354		
03-04	400 2X4 (Automatic)	63294	84354		
03-08	400 4X4 (Automatic) (ACT) (VP)	63294	84354		
04	400 Automatic TBX	63294	84354		
05-07	400 Automatic (TBX) (LE)	63294	84354		
07-09	400 Automatic TRV	63294	84354		
06-12	400 Automatic VP	63294	84354		
13	400	85260			
08-13	425	85260			
13	450	85260			
02	500i Automatic	63294	84354		
02-04	500 Automatic (TBX)	63294	84354		
05-09	500 (Automatic) (M4) (TBX)	63294	84354		
04-08	500 Automatic TRV	63294	84354		
09	500 H1 EFI 4X4	63294	84354		
09-12	550 LTD 4X4, 550 S 4X4, 550 (Cruiser) TRV (GT)	63294	84354		
04	650	63294	84354		
05-11	650 (TBX) (H1) (LE) (TRV)	63294	84354		
06-11	700 (H1 EFI)(H1 EFI TBX)(TRV)(TRV H1 EFI)	63294	84354		
06-11	700 (Auto) (Auto EFI) (Diesel)(TRV Cruiser)	63294	84354		
11-16	1000 (XT) (EPS) (TRV GT) (GT)	63294	84354		
09-10	1000 H2 TRV	63294	84354		
10	1000 H2 Cruiser TRV	63294	84354		
13-15	1000 4X4 (TRV LTD)	63294	84354		
09-16	MudPro 700 H1 EFI (LTD EPS) (LTD)	63293	84353		
10-16	MudPro 1000 H2 EFI (LTD EPS) (SE)	63293	84353		
08-10	Thundercat 1000 H2 (LE)		84354		
SUZ	UKI				
08-18	King Quad 400 (AS) (FS) (I) (Camo) (Special Edition)	63840	80566		
08-18	King Quad 500 AXi (PS) (Camo) (Special Edition)	70737	80558		
08-18	King Quad 750 (Axi) (PS) (Camo) (Special Edition) 4X4	70737	80558		
02-04	Eiger 400 (LT-A400) (LT-F400) 2X4	63840			
02-06	Eiger 400 (LT-A400F) (LT-F400F)	63840			
93-03	King Quad 300 (LT-F300F)	37842*			
08-18	King Quad 400 (AS) (FS) (I) (Camo) (Special Edition)	63840	80566		
07-12	King Quad 450 (Axi) (PS)	70737	80558		
09-18	King Quad 500 AXi (PS) (Camo) (Special Edition)	70737	80558		
05-07	King Quad 700 4X4	70737	80558		
04-05	Twin Peaks 700	62686			
02-06	Vinson 500 (LT-A500F)	65400			
03-05	Vinson 500 (LT-F500F)	65400			

FRONT AND CENTER PLOW MOUNTS FOR ATVs

YEAR	MODEL	CENTER PLOW MOUNTING KIT	FRONT PLOW MOUNTING KIT
YAM	IAHA		
16-18	Grizzly 700	88188	95745
18	Kodiak 450	88188	90855
16-18	Kodiak 700	88188	95745
07-12	Big Bear 400		85100
04-06	Bruin 350	64670	
12-14	Grizzly 300	64670	
07-11	Grizzly 350	64670	
07-11	Grizzly 350 (IRS)	64670	81656
12-14	Grizzly 350	64670	81656
05-09	Grizzly 400	64670	80534
05-07	Grizzly 450	64670	80534
08-14	Grizzly 450	64670	80534
09-14	Grizzly 550	73996	79403
02-08	Grizzly 660	64669	79605
07-11	Grizzly 700	73996	79403
12-15	Grizzly 700	88188	79403
07-11	Kodiak 350 IRS	64670	81656
03-04	Kodiak 400	64670	81656
03-09	Kodiak 400	64670	81656
03-04	Kodiak 450	64670	
05-08	Kodiak 450	64670	80534

*This kit requires using a WARN ProVantage plow lift to raise the plow

PLOWS 49



Product specifications are subject to change. ©2018 Warn Industries, Inc. WARN[®], the WARN logo, Spydura[®], Co Prepared[®], and THE RED HOOK STRAP are registered trademarks of Warn Industries. ProVantage[®], VRX[®], and AXON[®] are trademarks of Warn Industries, Inc. All photographs shown are copyrighted material. Reproduction in any way is prohibited without written permission of Warn Industries or the copyright owner. Printed in USA. 8/18. **PN 911510**