



# Installation Instructions

## Highback Front Seat Covers

### Vehicle Application

- Jeep TJ Wrangler  
2003 – 2006  
Part Number: 29228

INSTALLATION TIME	SKILL LEVEL
 1/4 Hour	 1 - Easy

TOOLS



**! WARNING** DO NOT remove the seats from the vehicle to install this product.

**! WARNING** This product is designed primarily to enhance the appearance of the vehicle and to shield the occupants from ordinary weather conditions. Do not rely in any way on the components of this product to contain occupants within the vehicle, or to protect against injury or death in the event of an accident. This product will not protect the occupants from falling objects. Never operate the vehicle in excess of manufacturer's specifications.

#### WEAR SEAT BELTS AT ALL TIMES

Read and follow, precisely, all installation instructions provided when installing product. Failure to do so may result in a poor fit and could place occupants of the vehicle in a potentially dangerous situation.

# Seat Installation Instructions


## Parts List

Seat Cover - Driver	Qty - 1
Seat Cover - Passenger	Qty - 1

### 1 Slide Seat Cover Over Back of Seat


Orient the Seat Covers on the seats. The quilting should face the front and the openings in the cover should line up with the "Fold and Tumble Lever" and the "Seat Recliner Lever".

With the quilting toward the front, slip the upper seat cover over the seat back. Pull the cover down to the seat bottom and smooth the fabric over the head rest. Carefully slip the opening for the "Fold and Tumble Lever" over the lever.

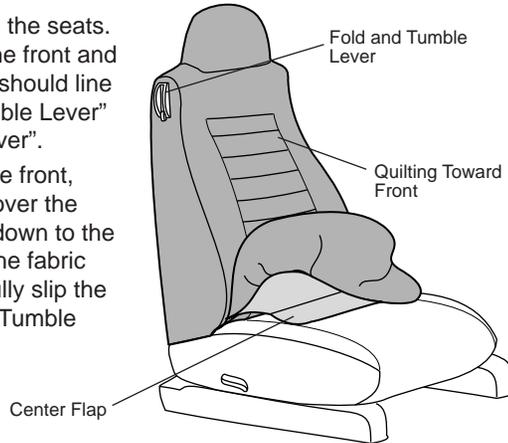


### 2 Tuck the Center Flap Between the Seat Back and the Seat Bottom

Locate the flap sewn to the inside of the cover and tuck it between the seat back and the seat bottom. If necessary, lift up on the bottom of the seat back to make it easier to slip the flap through.

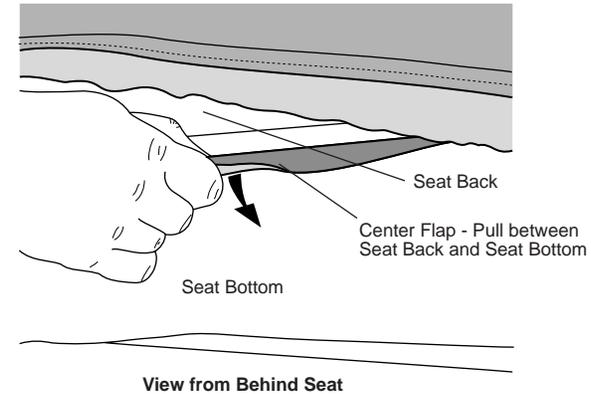


### 3 Secure the Bottom of the Seat Cover

Slide the cover over the seat bottom. Make sure that the "Seat Recliner Lever" is clear and operates freely. Fold the seat back forward. Wrap the fabric flap around the back of the seat bottom and fasten the snap and the hook and loop at the rear corner of the seat.

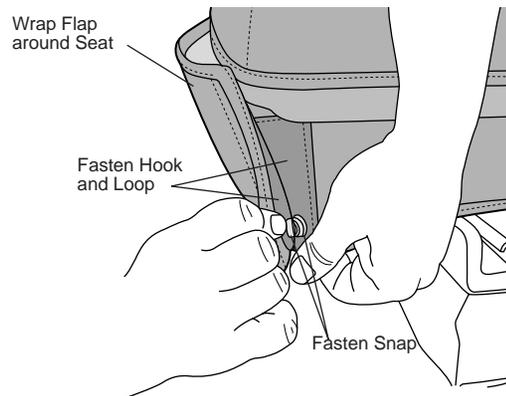

### 4 Secure the Center Flap to the Seat Bottom

Pull the center flap completely through between the seat back and the seat bottom. Fasten the loop strip on the edge of this flap to the hook strip along the top edge of the bottom flap and fasten the snaps.

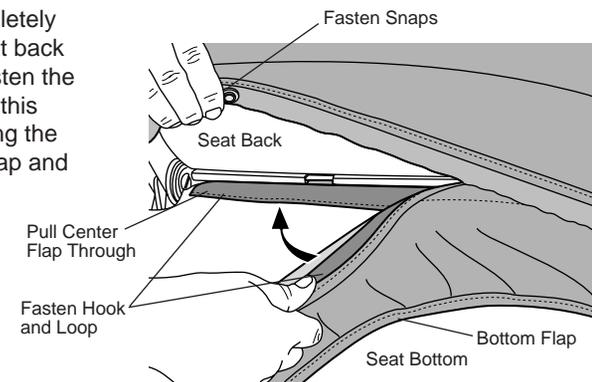

## Seat Installation Instructions

---

### 5 Fasten Seat Belt Opening

Fasten the snap at the opening behind the seat belt buckle.

