



# **INSTALLATION INSTRUCTIONS**

**PART#: 7FJ15SS/7FJ15A**

**TAIL LIGHT GUARD FOR FORD EXPLORER 02-05**

**Step One:** Locate hardware and check contents with hardware listed below.

DESCRIPTION	QTY
Taillight Guards (Left & Right)	2
Support Brackets	2
M4 x 10mm Phillips Machine Screws	2
M4 Flat Washers	2

**Step Two:** Remove factory screws that support the taillight to the vehicle (Figure 1). Carefully unfasten clips and remove taillight. **NOTE:** Save screws for later use.

**Step Three:** Engage Support Bracket and hold it in place, as shown in Figure 2. While holding Support Bracket, carefully re-install taillight and fasten factory clips (Figure 3).

**Step Four:** Locate (1) – M4 x 10mm Phillips Screw and (1) – M4 Flat Washer. Position Taillight Guard onto vehicle and loosely attach Taillight Guard to Support Bracket by using the hardware listed in this step (Figure 4).

**Step Five:** Align Mounting Brackets to factory mounting holes. Use factory screws removed in step one to attach Mounting Brackets to the vehicle (Figure 5). **NOTE: Open and close rear door/lift slowly, to be certain that the Taillight Guard does not interfere with rear door.** Tighten all hardware at this time.

Repeat steps 2-5 for opposite side

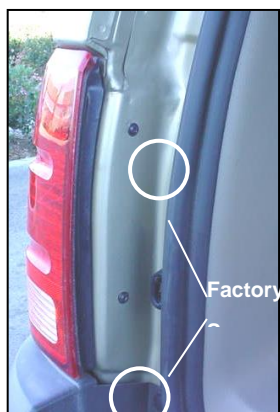


Figure 1



Figure 2



Figure 3



Figure 4



Figure 5