

Installation Instructions for the 40-20-40 Seats

(This Installation will cover the full Installation process for a 40-20-40 bench seat with middle console.)


Before You Begin...

Remove the headrests completely from the seats: There are a couple ways to remove headrests.

- A. Press the button on the base of the post and pull the headrest up until it disengages from the seat.
- B. If there are no buttons, locate small holes on the base. Insert a wire(or an unbent paperclip) until you hear a click, then pull the headrest up.

Note: The covers will be tight and the fabric will cling to your original upholstery.

-- DO NOT USE EXCESSIVE FORCE--

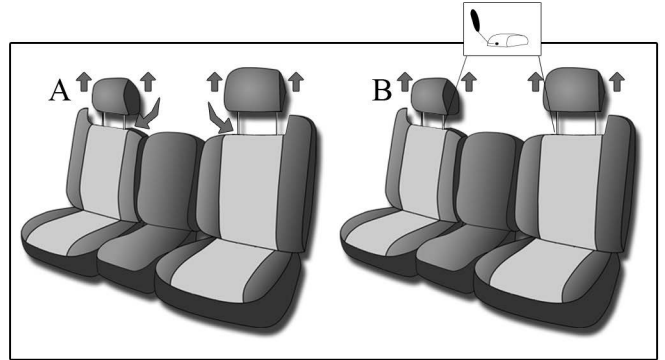

Seat Backs...

1. Find the cover for the Seat Back by matching the cut outs on the seat cover with the levers or knobs on the seat.
the seat.
2. Make sure the flap with hook and loop fastener is facing the front of the seat, then slide the cover down over the Seat Back.
(See Figure 2)
(Note: A. In some installations, the front flap hook and loop fastener attaches to the original fabric in between the seat.
B. If cover has plastic wedges, they will hook onto the seat once they have been tucked in.

Figure 2

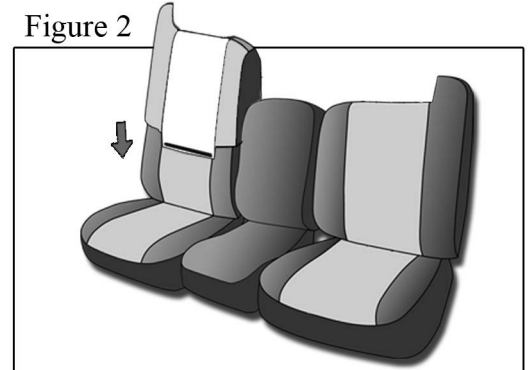


Figure 3



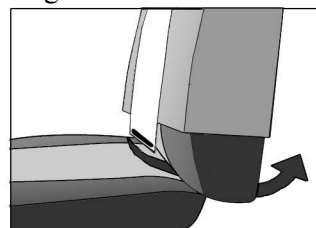


Figure 4

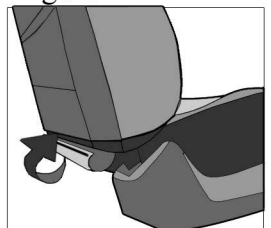

3. Once it's pulled all the way down insert the hook and loop fastener in between the seat. (See Figure 3)
4. Once the cover is secure with a tight snug fit proceed to attaching the hook and loop fastener to the back of the cover.
(See Figure4)

Figure 5

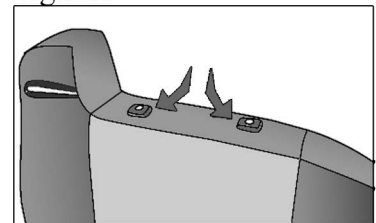

5. Then follow up by pushing the fabric cut outs under the headrest plastic units.(See Figure 5)

Installation Instructions for the 40-20-40 Seats



(This Installation will cover the full Installation process for a 40-20-40 bench seat with middle console.)

Seat Bottoms...

1. Find the cover for the Seat Bottom by matching the cut outs on the cover with any levers or knobs.
2. Slide the cover over the front of the seat so that the front of the cover is tightly fitted. Make sure the straps are facing the front of the seat. (See Figure 6)



*Note- Some seat covers come with the buckles facing the front instead of the straps.

3. Feed the straps under the seat until it reaches the back, if there is a cable beneath your seat, ensure that the straps go above it and don't interfere with the movement of the seat. (See Figure 7)
4. Once the cover is applied proceed to attaching the straps to the appropriate buckle. Smooth out the cover with one hand as you do so.(See Figure 8)

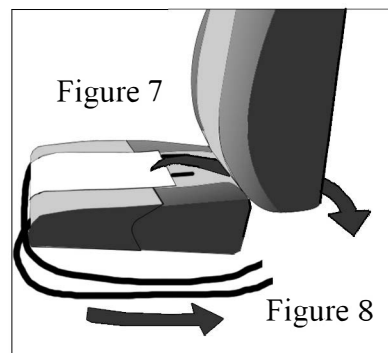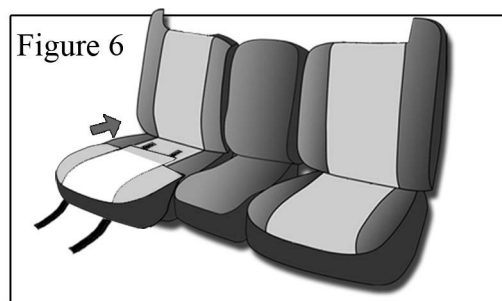

Middle Console...

1. Find the cover for the middle console by matching the cut outs on the cover with any levers or knobs or cup holders.
2. Slide the cover over the middle console making sure the fabric with hook and loop fastener is facing the front of the seat. Once the cover is pulled all the way down proceed to inserting the hook and loop fastener in between the seat. (see figure 9)
3. Once the cover is secure with a tight snug fit proceed to attaching the hook and loop fastener to the back of the cover.
- 4 Find the cover for the seat bottom by matching the cut outs on the cover with any levers or knobs.
5. Slide the cover over the front of the seat so that the front of the cover is tightly fitted, proceed to inserting the hook and loop fastener in between the seat and attaching it to the back of the sear cover. (see figure 10)

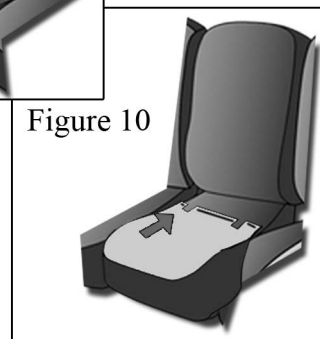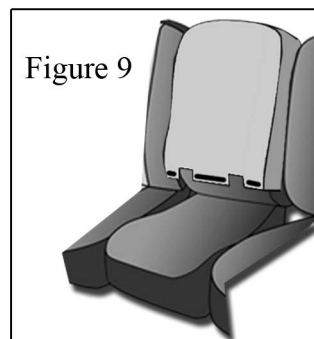

Headrests.

1. Fit the headrest covers over the headrest by working them down.
2. Secure the cover with the hook and loop fastener.
3. Reapply the headrest to the seat.

