

# Installation Instructions for the Solid Bench

(This Installation will cover the full process of a Solid Bench )


## Before You Begin...

Remove the headrests completely from the seats: There are a couple ways to remove headrests.

- A. Press the button on the base of the post and pull the headrest up until it disengages from the seat.
- B. If there are no buttons, locate small holes on the base. Insert a wire (or an unbent paperclip) until you hear a click, then pull the headrest up.

Note: The covers will be tight and the fabric will cling to your original upholstery.

-- DO NOT USE EXCESSIVE FORCE--

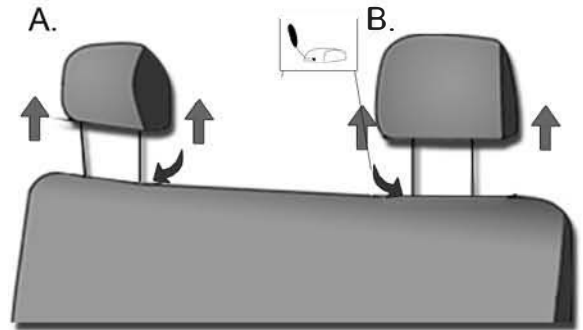

## Seat Back...

1. Find the cover for the Seat Back. You can do this by matching the cut outs on the seat cover with the levers or knobs on the seat.
2. Due to various seat configurations "Seat Back" seat covers will vary on installation!
  - a. If your Seat Back is ABLE to fold forward, slide the seat cover over the seat back. (See Figure 2a)
  - b. If your Seat Back is UNABLE to fold forward your seat cover will come equipt with laces and belts and hook and loop fastener. Slide the laces behind the Seat Back until you are able to securely attach them to the belts provided. (See Figure 2b)
3. Once the cover is secure with a tight snug fit proceed to attaching the hook and loop fastener to the back of the cover or tightening up the laces. (See Figure 3a & 3b)
 

(Note: A. In some installations, the front flap hook and loop fastener attaches to the original fabric in between the seat.

B. If cover has plastic wedges, they will hook onto the seat once they have been tucked in.
4. Follow up by pushing the fabric under the headrest plastic units. (See Figure 4)

Figure 2a




Figure 2b

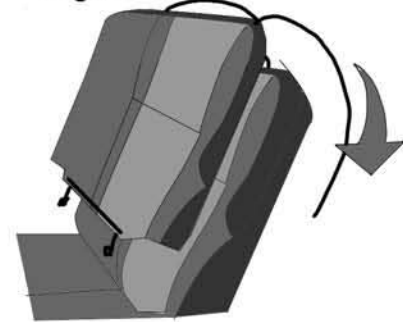


Figure 3a




Figure 3b





Figure 4



# Installation Instructions for the Solid Bench

(This Installation will cover the full process of a Solid Bench )

## Seat Bottom...

1. Find the cover for the Seat Bottom by matching the cut outs in the cover with any levers or knobs.
2. With some Seat Bottoms you'll need to remove the entire bottom cushion to apply the cover.

There are two different ways to remove the bottom cushion (See Figure 5)

- a. Pull up on the cushion until it's disengaged from its hinges.
- b. Pull on the release lever located near the hinge and pull up on the cushion.

3. Once the cover is applied proceed to attaching the straps to the appropriate buckle. Smooth out the cover with one hand as you do so. (See Figure 6)

Figure 5


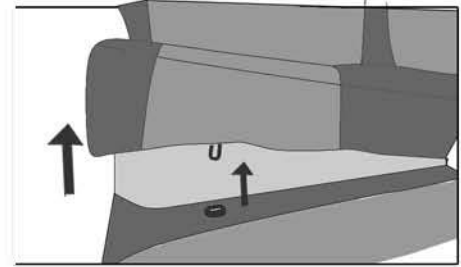


Figure 6



## Headrests...

1. Fit the headrest covers over the headrest by working them down.
2. Secure the cover with the attaches to the original fabric in between the seat.
3. Reapply the headrest to the seat.

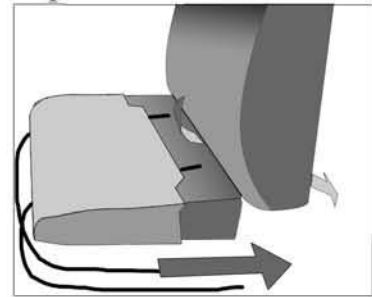