




INSTALLATION INSTRUCTIONS

MONO:

INSPECTION:


SEWING:

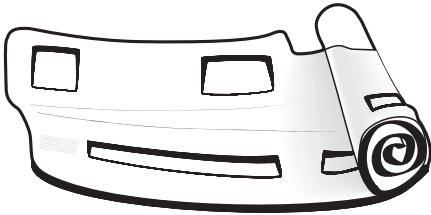

1. Unroll Your Dash Cover

1. Unroll your Dash Designs® dash cover and allow it to lie flat on your dashboard. Fold and crease your dash cover to conform to the contours of your dashboard while also aligning the vents and edges. Some dash covers require tucking between the windshield and dashboard to align properly.

A plastic spatula works well. **For carpet covers**, spraying the surface with water will soften the nap, making it easier to form.

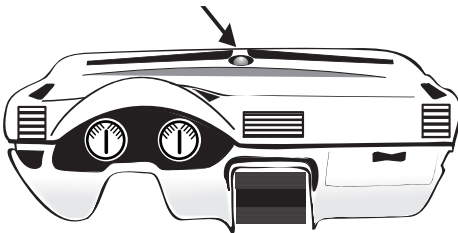


2. Check for sensors and align vents and edges.

2. Sensor Options: If your vehicle has a light sensor (for automatic headlights), a climate control sensor (for automatic temperature control), or other sensors, a hole may be cut on your dash cover. If it is not cut out, check for markings on the underside of the dash cover. Ensure these markings are aligned with the sensor and cut the opening using sharp scissors.



Dedicated to Quality and Customer Satisfaction

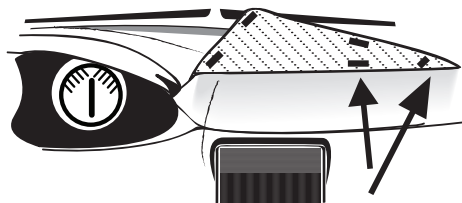

3. Clean surface and position Velcro

3. Attaching Your Dash Cover. Clean the surface of your dashboard using either soap and water or the enclosed moist towelette. Cut the Velcro strip into 1/2" long pieces and position as necessary on your dashboard by removing the protective paper and pressing down into place.

Passenger Airbag:

Your Dash Designs® dash cover has been manufactured to allow for the proper deployment of the airbag safety system. Dash Designs® assumes no responsibility for incorrect installation of dash cover resulting in improper airbag deployment or damages incurred by not securing products to vehicle dash.

Radio Speakers:

Dash Designs® uses porous fabric that does not impede sound and prevents light and harmful UV rays from reaching your dashboard surface.

