

Recessed Low Voltage Media Plate

with Duplex Receptacle 45-0031-WH

with Duplex Surge Suppressor 45-0041-WH



DataComm Electronics' new, patented Recessed Low Voltage Media Plate with Duplex Receptacle/Duplex Surge Suppressor offers the convenience of a duplex receptacle and a recessed plate with enough room to store low voltage cables behind your flat panel TV.



FEATURES

- Low profile design fits behind the industry's thinnest mounts and TV's
- Conceal multiple AV cables behind your flat panel TV
- 15 Amp/125 Volt duplex receptacle - tamper resistant*
- Outlet box included
- Mounting wings are attached to the media plate and fasten tightly against the back of the drywall
- Quick and easy to install
- No additional parts necessary

ADDITIONAL SURGE SUPPRESSOR FEATURES (45-0041-WH only)


15 Amp/125 Volt duplex surge receptacle with replaceable Surge Bloc *

- Maximum surge current - 12,000 amps
- Peak suppression voltage - 1,000 volts
- Hot/Neutral, Hot/Ground, Neutral/Ground
- Total maximum surge dissipation - 340 joules

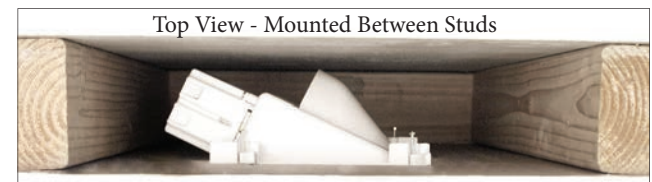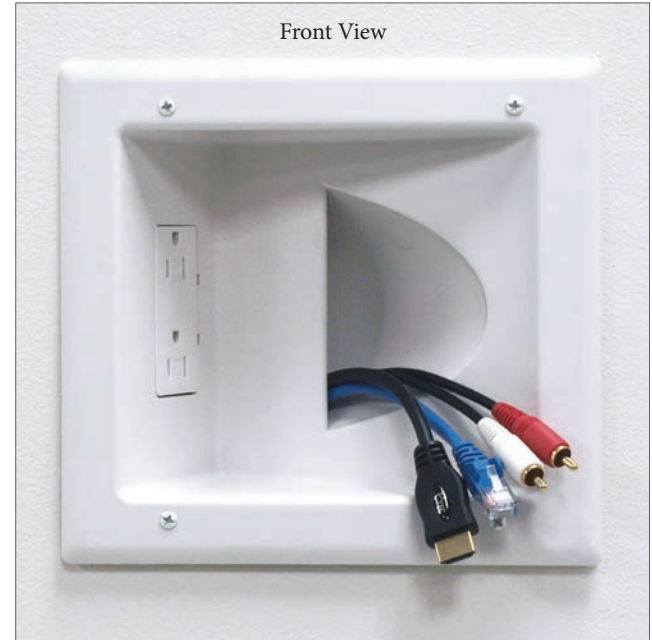

| Part Number | Description | Min. Order/Master Ctn. |
|-------------|--|------------------------|
| 45-0031-WH | Recessed Low Voltage Media Plate with Duplex Receptacle, White | 1/16 |
| 45-0041-WH | Recessed Low Voltage Media Plate with Duplex Surge Suppressor, White | 1/8 |

Installation Diagram - Front View

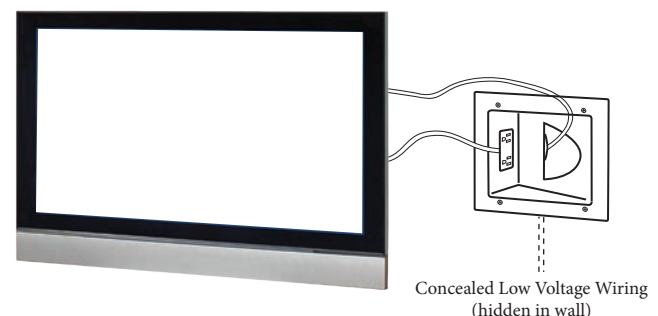

RoHS Compliant. *UL Listed Component.
This product is patent protected by U.S. Patent numbers:
D553475, D554475, and 7390964.

Recessed Low Voltage Media Plate

with 20 Amp Duplex Receptacle 45-0032-WH


DATACOMM™

Commercial Grade

DataComm Electronics' Low Voltage Media Plate with 20 Amp Duplex Receptacle is designed to streamline power and cable management behind wall mounted displays for commercial grade applications.

FEATURES

- Low profile design fits behind the industry's thinnest mounts and TV's
- Conceal multiple AV cables behind your HDTV
- Commercial Grade 20 Amp/125 Volt Duplex Receptacle
- Steel Outlet Box* included:
 - 2 ¾" Single Gang
 - Contains 8 knockouts for conduit or armored cable mounting options
- Large recessed cavity holds multiple low voltage cables
- Metal mounting wings are attached to the media plate and fasten tightly against the back of the drywall
- Quick and easy to install
- No additional parts necessary

COMMERCIAL GRADE OUTLET FEATURES

- 20 Amp/125 Volt Duplex Receptacle* 5-20R
 - 2 Pole
 - 3 Wire Grounding
 - Push-In Rear Connection and Side Screw Terminals
 - Tamper Resistant

NEW CONSTRUCTION COMPATIBLE

Use in conjunction with the Full-Size Rough-In Bracket (part #45-0102) for residential and commercial new construction.

| Part Number | Description | Min. Order/Master Ctn. |
|-------------|---|------------------------|
| 45-0032-WH | Recessed Low Voltage Media Plate with 20 Amp Duplex Receptacle, White | 1/16 |




Front View (In Wall)


20 Amp/125 Volt Duplex Receptacle and Steel Outlet Box



Top View - Mounted Between Studs

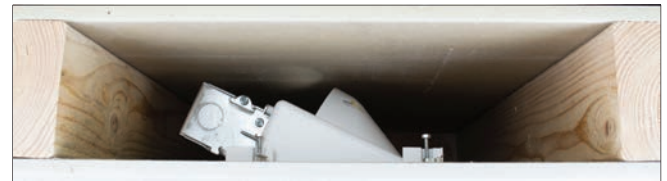

Installation Diagram - Front View

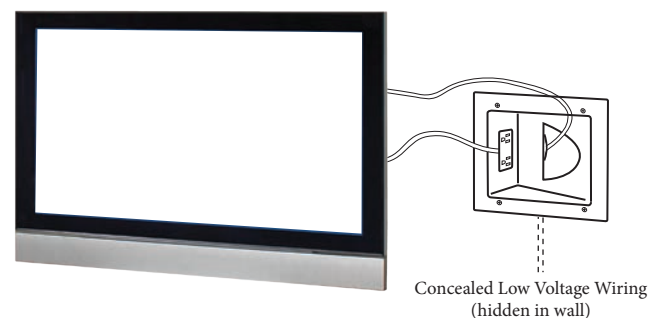

Concealed Low Voltage Wiring (hidden in wall)



RoHS Compliant. *UL Listed Component.

This product is patent protected by U.S. Patent numbers: D553475, D554475, and 7390964.