



## DP-20 Diaphragm Hand Pump

UL and non-UL models available

- Up to 20 Gallons/75 Litres per 100 strokes
- Pumps Gasoline, Diesel, Kerosene, Hydraulic Fluid and Oil (Up to 30 wt.)
- Aluminum Housing (Corrosion-Resistant & Lightweight)
- Handle Locks for Security
- Anti-Siphon Valve
- Fits 2" NPT Bung
- Portable

Choose our diaphragm pump for dirty or contaminated fluids. The DP-20 is maintenance free and so simple to use.






# DP-20 Diaphragm Hand Pump

UL and non-UL versions available

## SPECIFICATIONS

The GPI DP-20 Diaphragm Hand Pump is compatible with a wide variety of petroleum products and fits any container with a 2-inch NPT bung.

MODEL	DP-20 or DP-20-UL
PART NUMBER	138000-01 for Non- UL Model / 138000-02 for UL Model
PUMP TYPE	Diaphragm
FLOWRATE	0.2 gallon (0.75 litres) per stroke cycle.
NOZZLE TYPE	Thermoplastic
HOSE SIZE	3/4 inch x 8 ft. or 3/4 inch x 8 ft. U.L. Listed Hose
TANK FITTING	2 in. NPT
INLET/OUTLET	1 in. / 3/4 in.
SUCTION PIPE	Plastic, adjustable from 22 to 40 in. (56-102 cm).
USE WITH	Gasoline (up to 15% alcohol blends such as E15), Diesel fuel (up to 20% biodiesel blends such as B20), Kerosene, Petroleum products such as medium Oil (Up to 30 wt. ) and Hydraulic Fluid.

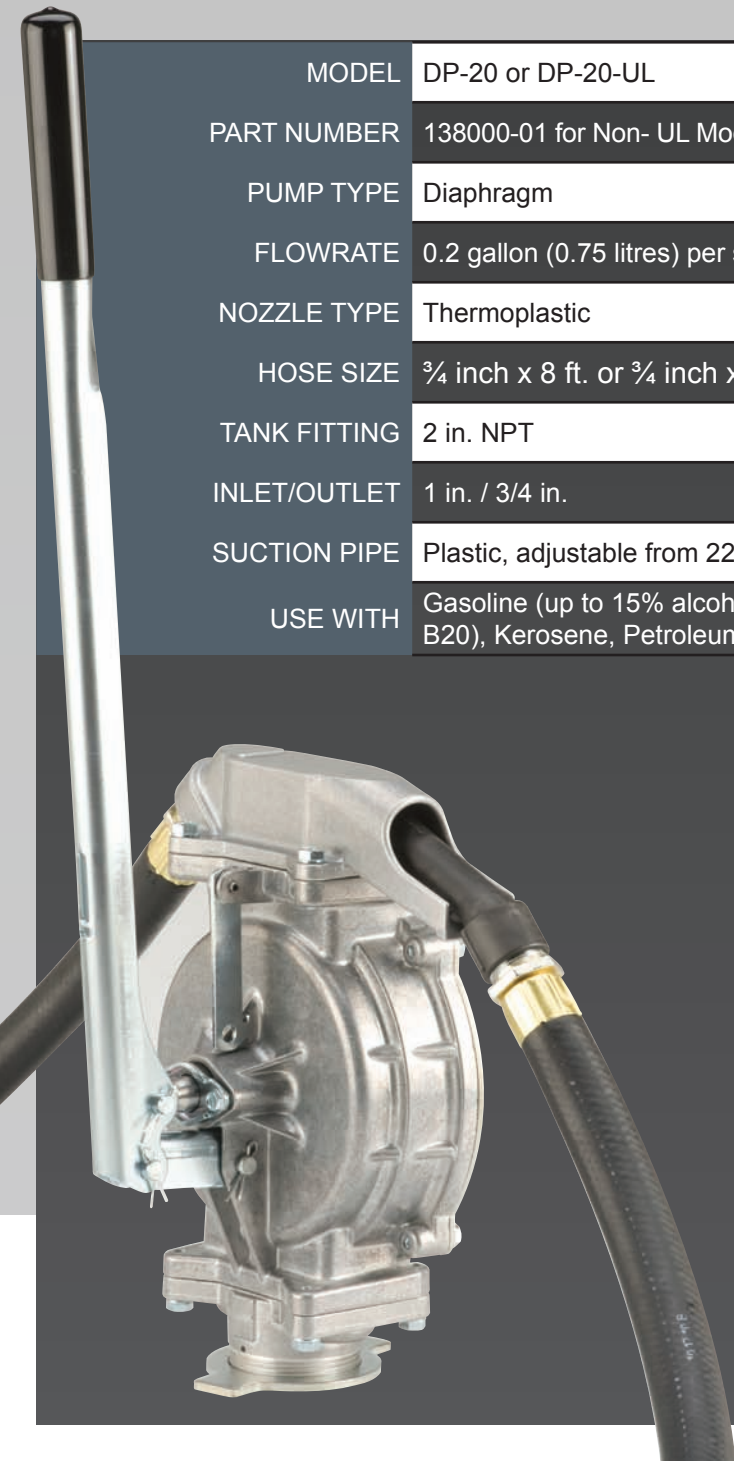

## PARTS INCLUDED

