



# KC HiLITES

# FLEX Single & Dual LED Lights



FLEX Single:  
Part No. 269  
Part No. 270 (shown)

FLEX Dual:  
Part No. 271  
Part No. 272 (shown)

## FLEX SINGLE & DUAL LED LIGHTS



### FEATURES

- FLEX Single Spread Beam – #269 Two Lights & Wiring Harness  
Each Light Rated at: 10-Watt; 975 Lumens;  
TBD LUX @ 10 Meters; TBD Candela
- FLEX Single Spot Beam – #270 Two Lights & Wiring Harness  
Each Light Rated at: 10-Watt; 975 Lumens;  
250 LUX @ 10 Meters; 25,000 Candela
- FLEX Dual Spot Beam – #271 One Light & Wiring Harness  
Rated at: 20-Watt; 1,950 Lumens;  
500 LUX @ 10 Meters; 50,000 Candela
- FLEX Dual Spread – #272 One Light & Wiring Harness  
Rated at: 20-Watt; 1,950 Lumens;  
350 LUX @ 10 Meters; 35,000 Candela
- Cree XM-L2 U2 LEDs
- 5,700K Color Temperature
- 50,000 Hour LED Life
- Precision Reflector Optics
- Operates on 9 to 18 Volts
- IP68 Rated Die-Cast Aluminum Housings
- Protected Against EMI Interference



Patent Pending: Flex Power-Strip - U.S. Patent Application No: 14/664,628 (Filed: March 20, 2015)  
Title: LIGHTING SYSTEM USING AN ELECTRICALLY CONDUCTIVE POWER STRIP

### PHOTOMETRICS

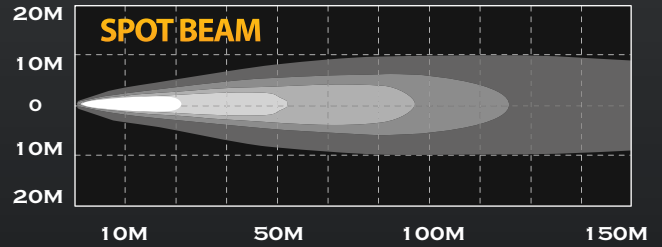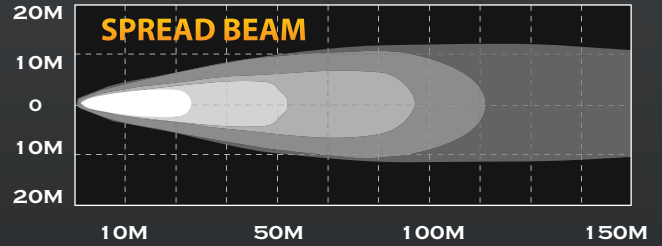

Die-Cast Colored Bezels



Linker Kit




Bezel Tool




Laser Cut Lexan Covers

### FLEX SINGLE

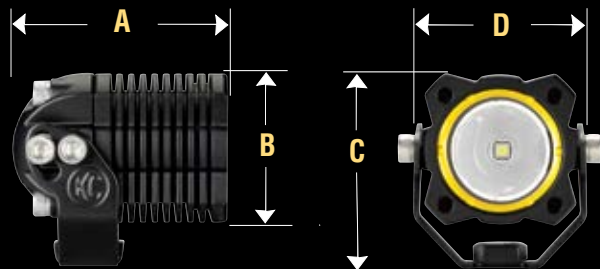

### FLEX LED LIGHT DIMENSIONS

### FLEX DUAL

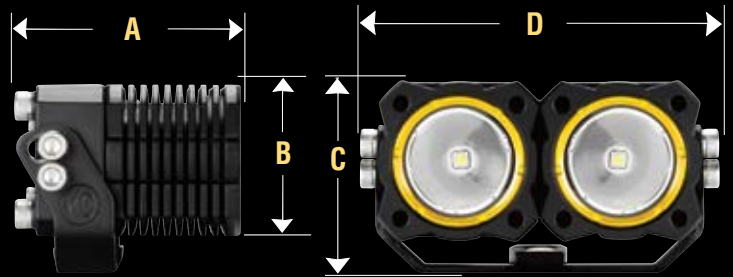

### KC FLEX LED SINGLE/DUAL LIGHTS

Pair Pack Part No.	Single Light Part No.	Model / Description	Beam Pattern	Watts	Amps	Volts	Lumens	Dimensions			
								A	B	C	D
269*	1269	FLEX Single LED Light	Spread	10	1	9 -18	975	2.92"	2.0"	2.45"	2.25"
270*	1270	FLEX Single LED Light	Spot	10	1	9 -18	975	2.92"	2.0"	2.45"	2.25"
267*	271*	FLEX Dual LED Light	Spot	20	2	9 -18	1,950	3.25"	2.0"	2.45"	4.25"
268*	272*	FLEX Dual LED Light	Spread	20	2	9 -18	1,950	3.25"	2.0"	2.45"	4.25"

\* Includes Wiring Harness