



## ***ROADIAN MTX***

### **SPACE, SIZE, MILEAGE: THE FUTURE OF DRIVING**

THE ROADIAN MTX FROM NEXEN TIRE, FEATURES AN AGGRESSIVE DESIGN THAT IS EXTREMELY VERSATILE FOR ON- AND OFF-ROAD DRIVING. THE CONSTRUCTION OF THE TIRE HAS BEEN IMPROVED TO MAXIMIZE YOUR LOAD AND TOWING CAPABILITIES WITHOUT SACRIFICING ANY OF THE RUGGED TRAITS OR ON-HIGHWAY DRIVING COMFORT ONE WOULD EXPECT FROM OUR ROADIAN LINE OF TIRES.



STYLE

# TWO SIDES TO EVERY STORY.

THE MTX OFFERS DISTINCTIVELY DESIGNED DUAL SIDEWALLS, GIVING YOU THE FREEDOM TO CHOOSE THE LOOK THAT BEST REPRESENTS YOU AND YOUR VEHICLE.



# PRACTICAL, DURABLE, INDUSTRIOUS.

## F-LOAD & 80 PSI


WHETHER YOU'RE HAULING HEAVY LOADS OR PRECIOUS CARGO, WE'VE GOT YOUR BACK. THE MTX SUPPORTS A MAXIMUM AIR PRESSURE OF 80 PSI IN BOTH LT METRIC AND FLOTATION APPLICATIONS ALLOWING OWNERS TO SET TIRE PRESSURES TO MANUFACTURING RECOMMENDATIONS.

THIS KEEPS TPMS SENSORS FUNCTIONING AND THE HIGHER AIR PRESSURES PROVIDE FOR GREATER TOWING CAPACITY, DURABILITY, AND TIRE SAFETY THAN THE COMPETITION.




# THE STRONG SILENT TYPE.

PATENTED, OPTIMIZED BLOCK POSITIONS REDUCE TIRE NOISE TO UNPRECEDENTED LEVELS. YOU SIMPLY WON'T BELIEVE YOU'RE DRIVING ON MUD TERRAIN TIRES.

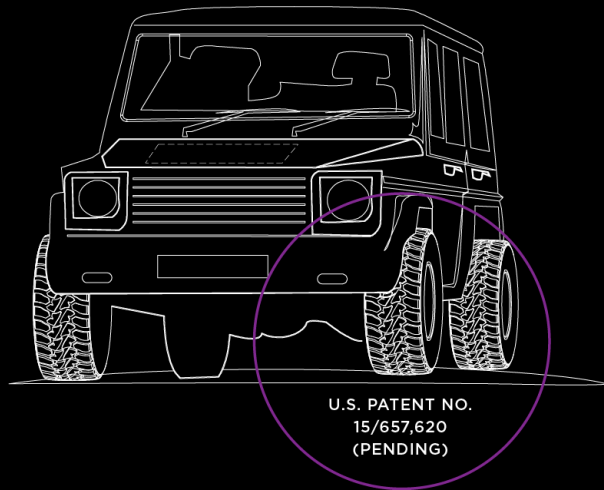

VARIABLE PITCH TREAD BLOCKS PROVIDE PATENTED NOISE CANCELING.

THE MTX HAS BEEN STRATEGICALLY DESIGNED TO AVOID REPETITIVE TREAD BLOCK CONTACT DURING THE DRIVE. EACH HORIZONTAL LINE REPRESENTS A DIFFERENT TREAD BLOCK CONTACT RATIO.

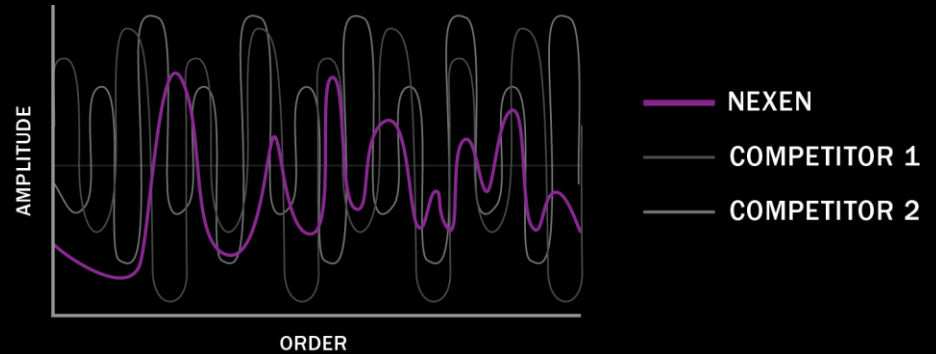

HIGHWAY DRIVING SOUND WAVES COMPARISON CHART.

NEXEN ENGINEERS HAVE DESIGNED THE MTX TO EMIT VARYING NOISE FREQUENCIES WHICH HELPS MITIGATE AND CANCEL OUT TIRE NOISE. THIS TECHNOLOGY REDUCES REPETITIVE NOISES WHICH CAN AMPLIFY IN SOUND INTENSITY QUICKLY.



# 3-PLY EQUALS PEACE OF MIND.

THE MTX GIVES YOU THREE LAYERS OF  
SIDEWALL PROTECTION, SPECIFICALLY  
DESIGNED TO GIVE YOU MORE STABILITY,  
DURABILITY, AND PEACE OF MIND WHEN  
HAULING HEAVY LOADS.



## **ROADIAN MTX**

3-PLY CARCASS ON  
ALL AVAILABLE MTX SIZES.



# ROADIAN MTX

## 12 SIZES

AVAILABLE FOR FDC ORDER  
IN NOVEMBER

## 23 SIZES

ADDITIONAL SIZES AVAILABLE  
FOR FDC ORDER IN FEBRUARY

## 15"-22" TIRE SIZE

## Q SPEED RATING

Inch	Product Code	Size	Load Index & Speed Symbol		Ply Rating	Max. Air psi	Max. Load (lbs)		Rim		Section Width inch	Overall Diameter inch	Tread Depth /32"	Sidewall
							S	D	Measuring	Approved				
15	15867	33X12.50R15	108	Q	6	35	2,205	-	10.0	8.5-11.0	12.5	32.8	21.0	Black
	* 15871	35X12.50R15	113	Q	6	35	2,535	-	10.0	8.5-11.0	12.5	34.8	21.0	Black
16	15873	LT265/75R16	123/120	Q	10	80	3,415	3,085	7.5	7.0-8.0	10.5	31.9	19.0	Black
	15879	LT285/75R16	126/123	Q	10	80	3,750	3,415	8.0	7.5-9.0	11.3	33.1	19.0	Black
17	15883	LT235/80R17	120/117	Q	10	80	3,085	2,835	6.5	6.0-7.5	9.3	32.0	18.0	Black
	15884	LT245/75R17	121/118	Q	10	80	3,195	2,910	7.0	6.5-7.5	9.8	31.7	18.0	Black
	15886	LT255/75R17	111/108	Q	6	50	2,405	2,205	7.0	6.5-8.5	10.0	32.3	18.0	Black
	* 15887	LT265/70R17	121/118	Q	10	80	3,195	2,910	8.0	7.0-8.5	10.7	31.9	19.0	Black
	* 15713	LT285/70R17	121/118	Q	10	80	3,195	2,910	8.5	7.5-9.0	11.0	33.0	19.0	Black
	* 15888	LT295/70R17	121/118	Q	10	80	3,195	2,910	8.5	7.5-10.0	11.8	33.5	20.0	Black
	16398	LT305/65R17	121/118	Q	12	80	3,195	2,910	9.0	8.5-11.0	12.2	32.8	20.0	Black
	16399	LT315/70R17	121/118	Q	12	80	3,195	2,910	9.5	8.0-11.0	12.7	34.6	20.0	Black
	16261	33X12.50R17	121	Q	12	80	3,195	-	10.0	8.5-11.0	12.5	32.8	21.0	Black
	* 16262	35X12.50R17	121	Q	12	80	3,195	-	10.0	8.5-11.0	12.5	34.8	21.0	Black
* 16348	37X12.50R17	121	Q	12	80	3,195	-	10.0	8.5-11.0	12.5	36.8	21.0	Black	
18	15925	LT275/65R18	123/120	Q	10	80	3,415	3,085	8.0	7.5-9.0	11.0	32.3	19.0	Black
	15897	LT275/70R18	125/122	Q	10	80	3,640	3,305	8.0	7.0-8.5	11.0	33.4	19.0	Black
	15926	LT285/65R18	125/122	Q	10	80	3,640	3,305	8.5	8.0-10.0	11.5	32.8	19.0	Black
	* 15898	LT295/70R18	129/126	Q	10	80	4,080	3,750	8.5	7.5-10.0	11.8	34.5	20.0	Black
	* 16400	LT305/70R18	128/125	Q	12	80	3,970	3,640	9.0	8.5-10.0	12.2	35.1	20.0	Black
	* 16263	33X12.50R18	122	Q	12	80	3,305	-	10.0	8.5-11.0	12.5	32.8	21.0	Black
	* 16264	35X12.50R18	128	Q	12	80	3,970	-	10.0	8.5-11.0	12.5	34.8	21.0	Black
20	* 15929	LT275/65R20	126/123	Q	10	80	3,750	3,415	8.0	7.5-9.5	11.0	34.3	19.0	Black
	* 15932	LT285/55R20	122/119	Q	10	80	3,305	3,000	9.0	8.0-10.0	11.7	32.6	19.0	Black
	* 15933	LT295/55R20	123/120	Q	10	80	3,415	3,085	9.5	8.0-10.0	12.2	33.0	20.0	Black
	* 15931	LT295/60R20	126/123	Q	10	80	3,750	3,415	8.5	8.0-10.0	11.8	34.2	20.0	Black
	* 15930	LT295/65R20	129/126	Q	10	80	4,080	3,750	8.5	8.0-10.0	11.8	35.4	20.0	Black
	* 16271	LT305/55R20	125/122	Q	12	80	3,640	3,305	9.5	8.5-11.0	12.4	33.5	20.0	Black
	* 16265	33X12.50R20	119	Q	12	80	3,000	-	10.0	8.5-11.0	12.5	32.8	21.0	Black
	* 16266	35X12.50R20	125	Q	12	80	3,640	-	10.0	8.5-11.0	12.5	34.8	21.0	Black
	* 16267	37X12.50R20	128	Q	12	80	3,970	-	10.0	8.5-11.0	12.5	36.8	21.0	Black
	* 16401	37X13.50R20	128	Q	12	80	3,970	-	11.0	8.5-11.0	13.6	36.8	21.0	Black
22	* 16270	37X13.50R22	128	Q	12	80	3,970	-	11.0	8.5-11.0	13.6	36.8	21.0	Black
	* 16269	35X12.50R22	121	Q	12	80	3,195	-	10.0	8.5-11.0	12.5	34.8	21.0	Black
	* 16268	33X12.50R22	114	Q	12	80	2,600	-	10.0	8.5-11.0	12.5	32.8	19.0	Black