
## Quick Detach Rack and Mounting Kit for Polaris Slingshot - all years INSTALLATION INSTRUCTIONS #PSS008

NOTE: This rack is designed to install and remove in seconds using the hitch pin clips provided while the receiver bracket stays permanently mounted to your roll bar as shown. The rack can be mounted to either roll bar or both if you desire two racks. When only mounting one rack we recommend using the passenger side as it will make refueling easier. When mounted on the left it is possible to refuel slowly - however will be a faster process if the rack is removed from the receiver.

- 1. Lay out and familiarize yourself with the components and hardware supplied.
- 2. Using the five supplied button head screws, bolt the receiver block (1A) to the receiver bracket (1B) as shown in photo (1) and tighten securely.
- 3. Place the four supplied carriage bolts through the holes in the mounting bracket as shown in photo (1) then place 2 of the supplied spacer blocks onto the bolts as shown with the rounded ends facing away from the plate (photo 1C).
- 4. Referring to photo (2) place the bracket assembly with carriage bolts and spacers up onto the rear side of the roll bar on the side desired (see above notes). Place the remaining spacers onto the bolts, curved side on first (1C) followed by the four supplied cap nuts. Slide the pins of the rack into the mating holes on the receiver bracket. While viewing the rack from the rear, align it to be level then tighten the four cap nuts securely.
- 5. Place the supplied locking pins through the holes located near the end of the pins of the rack from the top down, and then secure the locking clips.
- 6. Also available as seen on the left rack in photo 2 are a matching waterproof luggage bag pt# RB100, and lock rods pt# RBDL (not seen), to secure the bag to the rack.





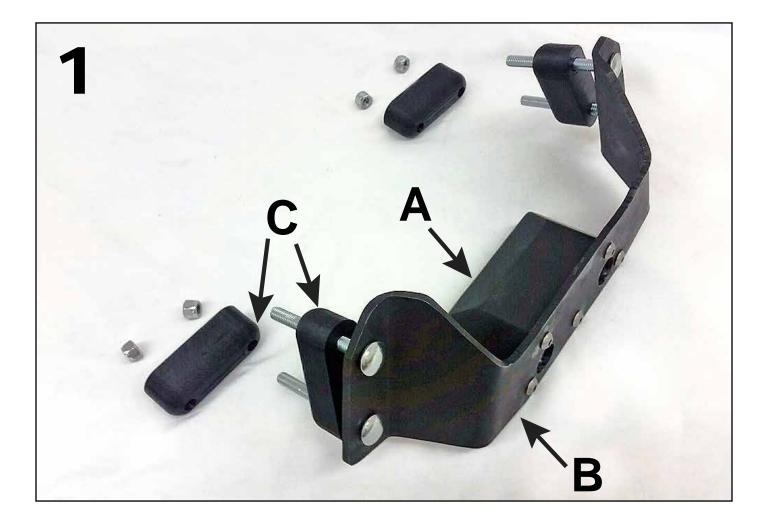

Rely only on high-grade motorcycle luggage systems & saddlebags offered on our virtual shelves.