

CONTENTS

All Optronics products conform to DOT/SAE/FMVSS/CMVSS 108 standards where applicable when applied according to federal lighting requirements

LED TRUCK & TRAILER LIGHTING	2 - 229
Headlamps	
FUSION™ Stop/Turn/Tail/Back-Up Lamps	
Sealed Stop/Turn/Tail Lights & Parking/Turn Signals	
Combination Tail Lights & Kits	
DOT Compliant Back-Up Lights	
Warning Lights	
Millennium® Series	
Sealed Marker/Clearance Lights	
Surface Mount Marker/Clearance Lights	
Identification Light Bars	
License Plate Lights	
Interior & Utility Lights	
Work & Off-Road Lights	211
INCANDESCENT TRUCK & TRAILER LIGHTING	230 - 293
Sealed Stop/Turn/Tail Lights & Parking/Turn Signals	230
Combination Tail Lights & Kits	234
DOT Compliant Back-Up Lights	248
Millennium Series®	
Sealed Marker/Clearance Lights	
Surface Mount Marker/Clearance Lights	
Identification Light Bars	
License & Utility Lights	
Utility & Interior Lights	
Halogen Lights	291
RV LIGHTS & ACCESSORIES	294 - 322
ACCESSORIES - CONSPICUITY, MOUNTING, WIRING	323 - 357
FMVSS LIGHTING REQUIREMENTS	358 - 364
INDEX	365 - 377
MATRICES	378 - 383





HLL70HLB



HLL70 SERIES

DOT Compliant High/Low Beam Sealed LED Headlamp

- Replace standard 5" x 7" sealed beam halogen and HID headlights
- Light output whiter than incandescent for greater visibility
- Long lasting, energy efficient diodes last up to 50 times longer than incandescent, draws just 1.1 amp
- Dual power: use with 12VDC or 24VDC systems
- Hard wired design with industry standard H4 three-blade connector
- Die cast aluminum construction with powder coat finish resists corrosion
- Tough polycarbonate lens
- IP67 rating: protected from dust and capable of withstanding water immersion, offering increased reliability and service life

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
HI	GH/LOW BEAM	I HEADLAMP - 12 DIODES	
HLL70HLB	HLL70HLBP	12-24VDC High/Low beam	1
		RETAIL	
HLL70HLS	Retail Ready	Single light, Retail Box	1

IP67 rating: protected from dust and capable of withstanding water immersion, offering increased reliability and service life

FMVSS HL
MATERIALS Polycarbox

MATERIALSPolycarbonate lens, aluminum housingVOLT/AMP12.8VDC - High 1.13A, Low 0.85AWT/DIMS2.99 lbs. / 7.937" x 5.625" x 3.5"

WARRANTY Lifetime LED Warranty

HLL93 SERIES

DOT Compliant High/Low Beam Sealed LED Headlamp

- Raw lumen output: 2460 lm, Effective lumen output: 1722 lm
- Replace standard 7" sealed beam halogen and HID headlights
- Light output whiter than incandescent for greater visibility
- Long lasting, energy efficient diodes last up to 50 times longer than incandescent, draw less than 1 amp
- Dual power: use with 12VDC or 24VDC systems
- Die cast aluminum construction with powder coat finish resists corrosion
- Tough polycarbonate lens
- IP67 rating: protected from dust and capable of withstanding water immersion, offering increased reliability and service life

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
H	IGH/LOW BEAN	I HEADLAMP - 12 DIODES	
HLL93HLB	HLL93HLBP	12-24VDC High/low beam	1
	a	RETAIL	
HLL93HLS	Retail Ready	Single light, Retail Box	1

IP67 rating: protected from dust and capable of withstanding water immersion, offering increased reliability and service life

FMVSS	HI

MATERIALS Polycarbonate lens and aluminum housing
VOLT/AMP 12.8VDC - High Beam .84A / Low Beam .41A

WT/DIMS 1.721 lbs. / 7" x 7" x 3.25"
WARRANTY Lifetime LED Warranty






HLL93HLB

















HLL78LB





HLL79HB



HLL78/79 SERIES

DOT Compliant High and Low Beam Sealed LED Headlamps

- Raw lumen output: 2340 lm, Effective lumen output: 1638 lm
- Replace standard 4" x 6" sealed beam halogen and HID headlamps
- Light output whiter than incandescent for greater visibility
- Long lasting, energy efficient diodes last up to 50 times longer than incandescent, draw less than 1 amp
- Dual power: use with 12VDC or 24VDC systems
- Hard wired with standard H4 3-blade connector;
 16 gauge, 7-inch leads
- Die cast aluminum construction with powder coat finish resists corrosion
- Tough polycarbonate lens with protective coating

BULK P/N	POLYPACK P/N	DESCRIPTION		QTY	
	LOW BEAM HEADLAMP - 11 DIODES				
HLL78LB	HLL78LBP	12-24VDC Low beam		1	
	HIGH BEAM HEADLAMP - 11 DIODES				
HLL79HB	HLL79HBP	12-24VDC High beam		1	
	RETAIL				
HLL78LS		Low beam, Retail Box		10	
HLL79HS	Retail Ready	High beam, Retail Box		10	

IP67 rating: protected from dust and capable of withstanding water immersion, offering increased reliability and service life


FMVSS HL


MATERIALS Polycarbonate lens, aluminum housing

VOLT/AMP 12.8VDC - High 1.47A / Low 1.35A

WT/DIMS 1.858 lbs. / 6.58" x 4.2" x 3.32"

WARRANTY Lifetime LED Warranty






HLL90 & HLL88/89 SERIES

DOT Compliant High/Low Beam Sealed LED Headlamp

- Replace standard sealed beam halogen and HID headlamps
- Light output whiter than incandescent for greater visibility
- Dual power: use with 12VDC or 24VDC systems
- Hard wired with standard H4 3-blade connector;

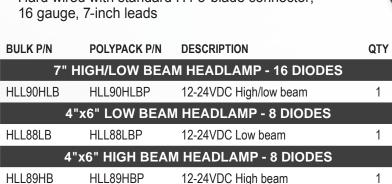

IP67 rating: protected from dust and capable of withstanding water immersion, offering increased reliability and service life

FMVSS HL

MATERIALS Polycarbonate lens, aluminum housing


VOLT/AMP HLL90: 12.8VDC - High Beam 1.85A / Low Beam 1.80A


HLL88/89: 12.8VDC - 0.85A

WT/DIMS HLL90: 2.05 lbs. / 7" x 7" x 2.8"

HLL88/89: 1.14 lbs. / 6.563" x 4.188" x 3.313"


WARRANTY Lifetime LED Warranty







HLL90HLB







HLL88LB



HLL89HB













STL201 GLOLIGHT® SERIES

GloLight® FUSION™ 4" Round Sealed Stop/Turn/Tail/Back-Up Light with Mounting Flange

PATENTED TECHNOLOGY

- DOT-compliant back-up light built into stop/turn/tail light
- · Sonically sealed, weathertight connections
- Multi-function: Stop, turn, tail and back-up, all in one light
- Recess flange mount design for secure installation


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
RED S	RED STOP/TURN/TAIL/BACK-UP LIGHT - 24 DIODES				
STL201RFMB	STL201RFMBP	Weathertight connection	10		
	ACCESSORIES				
A45PMB	A45PMBP	Weathertight pigtail, 3-wire	50		
A42PMB	A42PMBP	Weathertight pigtail, 2-wire	100		


FMVSS S2 T2 I6 (2)R

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - .316A Stop/Turn, .15A Tail, .3A Back-Up

WT/DIMS .38 lbs. / 5.5" x 5.5" x 1.5"
WARRANTY Lifetime LED Warranty







Weathertight connection

STL201X SERIES

FUSION™ 4" Round Sealed Stop/Turn/Tail/Back-Up Light


- DOT-compliant back-up light built into stop/turn/tail light
- Sonically sealed, waterproof
- Multi-function: Stop, turn, tail and back-up, all in one light
- · Accepts industry standard PL-3 plugs

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
RED STO	P/TURN/TAIL/BA	CK-UP LIGHT - 16 DIODES	
STL201XRB	STL201XRBP	PL-3 connections	10
STL201XR1224B	STL201XR1224BP	PL-3 connections, 12/24V	10
	ACCES	SORIES	
A45GB	A45GBP	Grommet	50
A46GB	A46GBP	New design grommet	50
A45BB	A45BBP	Black plastic mounting flange	100
A45SB	A45SBP	Stainless steel mounting flange	20
A45PB	A45PBP	Straight pigtail, 3-wire PL-3	100
A47PB	A47PBP	Right angle pigtail, 3-wire PL-3	100
A45CB	A45CBP	Pigtail, 2-wire	100
A49PB	A49PBP	Right angle pigtail, 2-wire	100
BK45BB	BK45BBP	Black steel bracket	10

FMVSS	S2 T2 I6 (2)R
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC375A Stop/Turn, .145A Tail, .3A Back-Up
WT/DIMS	.35 lbs. / 4.313" x 4.313" x 1.625"
WARRANTY	Lifetime LED Warranty



Standard PL3 connections











STL201XRB













STL201XRFHXB



FUSION™ 4" Round Surface Mount Stop/Turn/Tail/Back-Up Light with Reflex Mounting Flange

PATENTED TECHNOLOGY

- Sonically sealed, waterproof
- Multi-Function: stop/turn/tail/back-up with reflex flange - all in one light
- FMVSS compliant for over 80" applications
- Surface mount
- Hard wired, includes 8" lead and ground wires

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
RED STO	P/TURN/TAIL/B	ACK-UP LIGHT - 20 DIODES	5
STL201XRFHXB	STL201XRFHXBP	Hard wired, 8" leads	10

FMVSS S2 T2 I6 (2)R A

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - .375A Stop/Turn, .145A Tail, .3A Back-Up

WT/DIMS .38 lbs. / 5.44" x 5.44" x .79"
WARRANTY Lifetime LED Warranty





STL1211 SERIES

FUSION™ GloLight® LED 6" Surface Mount Stop/Turn/Tail/Back-Up Light

GloLight

- · Sonically sealed, waterproof
- Multi-function: stop/turn/tail/back-up
- GloLight shape illuminates for tail light function
- Clear lens, red and white diodes
- Surface flange mount
- Hard wired with female PL-3 plugs

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
STOP/TU	JRN/TAIL/BACK-L	JP LIGHT - 22 DIODES	
STL1211RCFHPG	STL1211RCFHPGP	Red, hard wired	10
	ACCESSO	DRIES	
A211NCCB	A211NCCBP	Snap-on bezel, unfinished	50
A78RXB	A78RXBP	Red reflex, snap-on trim ring FMVSS "A"	25
A178TRSSB	A178TRSSBP	Stainless steel, screw mount trim ring	50








STL1211RCFHPG

FMVSS	S2 T2 I6 (2)R
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC375A Stop/Turn, .02A Tail, .242A Back-up
WT/DIMS	.4 lbs. / 7.52" x 3.29" x 1.01"
WARRANTY	Lifetime LED Warranty
WT/DIMS	.4 lbs. / 7.52" x 3.29" x 1.01"











STL211XRB

STL211X SERIES

FUSION™ 6" Oval Sealed LED Stop/Turn/Tail/Back-Up Lights

PATENTED TECHNOLOGY

- DOT-compliant back-up light built into stop/ turn/tail light
- Sonically sealed, waterproof
- Multi-function: Stop, turn, tail and back-up, all in one light

POLYPACK P/N DESCRIPTION

Accepts industry standard PL-3 plugs





STL211XRCB



TLL211XRTMK

DULK P/N	PULTPACK P/N	DESCRIPTION	QII
RED S	TOP/TURN/TA	AIL/BACK-UP LIGHT - 16 DIODES	
STL211XRB	STL211XRBP	Red lens, PL-3 connection	10
STL211XRCB	STL211XRCBP	Clear lens, PL-3 connection	10
	А	CCESSORIES	
A70GB	A70GBP	Grommet, flush mount	50
A45PB	A45PBP	Pigtail, 3-wire	100
A47PB	A47PBP	Right angle pigtail, 3-wire	100
A45CB	A45CBP	Pigtail, 2-wire	100
A49PB	A49PBP	Right angle pigtail, 2-wire	100
A77S1B	A77S1BP	Gray, flat design steel bracket	50
BK70BB	BK70BBP	Black steel bracket	10
		RETAIL	
TLL211XRTMK	Retail Ready	Try Me Retail Kit: (2) ea. STL211XRB, A70GB, A45PB, A45CB, and (1)	6



A30W5BLB 5-way harness, clam


FMVSS S2 T2 I6 (2)R


MATERIALS Polycarbonate lens and housing

12.8VDC - .375A Stop/Turn, .020A Tail, .242A Back-Up VOLT/AMP

.35 lbs. / 6.438" x 2.313" x 1.50" WT/DIMS

WARRANTY Lifetime LED Warranty





HOLE CUT-OUT: 6.85" X 2.5" (1.25" R)



Standard PL3 connections



STL211XRFHB

FUSION™ LED 6" Surface Mount Stop/Turn/Tail/Back-Up Light

- DOT-compliant back-up light built into stop/turn/tail light
- Flange surface mount-no panel cut-out required
- · Sonically sealed, waterproof
- Hard wired, with 8-in leads

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
STOP/TU	RN/TAIL/BACK-U	JP LIGHT - 17 DIODES	
STL211XRFHB	STL211XRFHBP	Hard wired	10
STL211XRFHPG	STL211XRFHPGP	Hard wire, female PL-2 and PL-3 plugs	10
ACCESSORIES			
A211CB1	A211CB1P	Chrome, snap-on bezel	25
A211NCCB	A211NCCBP	Snap-on bezel, unfinished	50
A211RXB	A211RXBP	Red reflex flange ring	25
A178TRSSB	A178TRSSBP	Stainless steel, screw mount trim ring	50


FMVSS	S2 T2 (2)R
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC265A Stop/Turn, .24A Tail, .3A Back-up
WT/DIMS	.4 lbs. / 7.5" x 3.25" x .75"
WARRANTY	Lifetime LED Warranty







STL211XRFHB



















STL68 SERIES

FUSION™ Surface Mount LED Combination Stop/ Turn/Tail/Back-Up Light

- Sonically sealed, waterproof
- Low profile design—only 1/2" thick
- Surface mount on 9-11/16" centers
- · Hard wired with separate ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
STOP/T	URN/TAIL/BAC	K-UP LIGHT - 14 DIODE	S
STL68RB	STL68RBP	Red, hard wired	10
STL68RPB	STL68RPBP	Red, .180 male bullets	10
	ACCE	SSORIES	
A68SSB	A68SSBP	Stainless steel snap-on ring	20

FMVSS	S2 T2 I6 (2)R
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC35A Stop/Turn, .05A Tail, .3A Back-up
WT/DIMS	.275 lbs. / 10.125" x 3.063" x 0.5"
WARRANTY	Lifetime LED Warranty



STL264 SERIES

FUSION™ LED Thinline Stop/ Turn/Tail/Back-Up Lights







STL264RCB

PATENTED TECHNOLOGY

- Sonically sealed, waterproof
- Low profile design—only 1/2" thick
- Surface mount on 9-11/16" centers
- · Hard wired with separate ground wire

+ .=	19.6875"	-
1" 🕲		•
†	20.50"	-
.75"	1	

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
STOP/TU	JRN/TAIL/BAC	K-UP LIGHT - 19 DIODE	S
STL264RB	STL264RBP	Red, hard wired	10
STL264RCB	STL264RCBP	Clear lens, red, hard wired	10
	ACCES	SSORIES	
A64CRB	A64CRBP	Chrome base/bezel	50
A64BB	A64BBP	Black base/bezel	50
FMVSS	S2 T2 I6 (2)R		
MATERIALS	Polycarbonate	e lens and housing	
VOLT/AMP	12.8VDC26	55A Stop/Turn, .24A Tail, .3A Ba	ack-up
WT/DIMS	.441 lbs. / 20.5	5" x 1" x .75"	

Lifetime LED Warranty



WARRANTY





FTL42A1224B


FTL42/53 SERIES 4" Round Sealed LED Front Turn Signal

- Sonically sealed, waterproof
- 10 SMD diodes
- Dual power: use with 12VDC and 24VDC systems


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
YELLOW PARKING/TURN SIGNAL - 10 DIODES				
FTL42A1224B	FTL42A1224BP	Flange mount, hard wired, 12V/24V	10	
FTL53ALCPG	FTL53ALCPGP	Grommet mount, hard wired, Deutsch connection, 12/24V, protective coating on lens, EMC	10	
ACCESSORIES				
A45GB	A45GBP	Grommet	50	



FTL53ALCPG



FTL53ALCPG

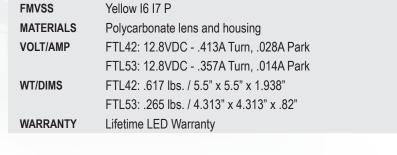



Deutsch connection on FTL53ALCPG

STL603 SERIES

LightGuide™ LED 4" Stop/Turn/Tail Light

- Central X-shaped feature illuminates for tail light function
- · Surrounding diodes light for stop and turn functions
- Sonically sealed, waterproof
- Grommet mount
- · Accepts industry standard PL-3 connector

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
R	ED STOP/TURN	I/TAIL LIGHT - 12 DIODES	
STL603RB	STL603RBP	PL-3 connection	10
	AC	CESSORIES	
A45GB	A45GBP	Grommet	50
A45PB	A45PBP	Pigtail, 3-wire	100
A47PB	A47PBP	Right angle pigtail, 3-wire	100
BK45BB	BK45BBP	Black steel bracket	10
A45BB	A45BBP	Black plastic flange	100
A45SB	A45SBP	Stainless steel mounting flange	20
A45CGB	A45CGBP	Chrome grommet cover	20


FMVSS	Red S2 T2 I6
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC421A Stop/Turn, .114A Tail
WT/DIMS	.375 lbs. / 4.313" x 4.313" x 1.688"
WARRANTY	Lifetime LED Warranty







STL603RB



HOLE CUT-OUT: 4.5"





GloLight*









STL101 GROMMET MOUNT SERIES GloLight® 4" Sealed LED Lights

PATENTED TECHNOLOGY

- Sonically sealed, waterproof
- Mount in any 360 degree position
- Available in tinted and clear lens models
- Available with standard PL-3 or optional weathertight connection

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
RED	STOP/TURN/TA	IL LIGHT - 21 DIODES	
STL101RB	STL101RBP	PL-3 connection	10
STL101R1224B	STL101R1224BP	PL-3 connection 12/24V	10
STL101RMB	STL101RMBP	Weathertight connection	10
STL101RCB	STL101RCBP	Clear lens, red diodes, PL-3	10
STL101RCMB	STL101RCMBP	Clear lens, red diodes, weathertight	10
STL101RKB	STL101RKBP	Kit: Red stop/turn/tail light, PL-3 connection, A45GB grommet, A47PB pigtail	10
YELLO	W PARKING/TU	RN SIGNAL - 21 DIODES	
STL101AB	STL101ABP	PL-3 connection	10
STL101ACB	STL101ACBP	Clear lens, yellow diodes, PL-3	10
	ACCES	SSORIES	
A45GB	A45GBP	Grommet	50
A45PB	A45PBP	Pigtail, 3-wire	100
A47PB	A47PBP	Right angle pigtail, 3-wire	100
A45PMB	A45PMBP	Weathertight pigtail	100
AL45PWTB	AL45PWTBP	Weathertight to PL-3 adaptor	50
BK45BB	BK45BBP	Black steel bracket	10
A45BB	A45BBP	Black plastic flange	100
A45SB	A45SBP	Stainless steel mounting flange	20
A45CGB	A45CGBP	Chrome grommet cover	20
FMVSS MATERIALS VOLT/AMP			
WT/DIMS WARRANTY	.35 lbs. / 4.313" dia Lifetime LED Warra	2	



4 5/16"

HOLE CUT-OUT: 4.5"

STL101 FLANGE MOUNT SERIES

GloLight® 4" Sealed LED Lights with Mounting Flange

PATENTED TECHNOLOGY

BULK P/N

- Sonically sealed, waterproof
- Flange mount for security, theft reduction
- Available in tinted and clear lens models
- Available with standard PL-3 or optional weathertight connection

POLYPACK P/N

	DOLKTAK	1 OLITAGICT /III	DECORAL FIGHT	Q(II
	RE	D STOP/TURN/	TAIL LIGHT - 21 DIODES	
	STL101RFB	STL101RFBP	PL-3 connection	10
	STL101RFMB	STL101RFMBP	Weathertight connection	10
	STL101RCFB	STL101RCFBP	Clear lens, red diodes, PL-3	10
	STL101RCFMB	STL101RCFMBP	Clear lens, red diodes, weathertight	10
		ACC	ESSORIES	
	A45PB	A45PBP	Pigtail, 3-wire	100
	A47PB	A47PBP	Right angle pigtail, 3-wire	100
	A45PMB	A45PMBP	Weathertight pigtail	100
	AL45PWTB	AL45PWTBP	Weathertight to PL-3 adaptor	50
	BK45BB	BK45BBP	Black steel bracket	10
	A101TRSSB	A101TRSSBP	Stainless steel trim ring	50
	A42GB	A42GBP	Mounting gasket, black	100

DESCRIPTION

FMVSS	Red S2 T2 I6
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC375 Stop/Turn, .145A Ta
WT/DIMS	.38 lbs. / 5.48" x 5.48" x 1.53"
WARRANTY	Lifetime LED Warranty

Industry-standard connections


Easy retrofit of lights to existing harness



Standard PL3 connection



Weathertight connection






GloLight

STOP/TURN

QTY


















HOLE CUT-OUT: 4.5"

STL43 SERIES

4" Round Sealed LED Lights

- Sonically sealed, waterproof
- Kits include grommet and plug
- Mount in any 360 degree position
- Available in 12-24V models
- Available with standard PL-3 or optional weathertight connection

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
R	ED STOP/TURN	/TAIL LIGHT - 10 DIODES	
STL43RB	STL43RBP	PL-3 connection, 12V	10
STL43RKB	STL43RKBP	Kit with A45GB & A47PB, PL-3, 12V	10
STL43R24B	STL43R24BP	PL-3 connection, 12-24V	10
STL43RMB	STL43RMBP	Weathertight connection, 12V	10
STL53RCB	STL53RCBP	Clear lens, red diode, PL-3, 12V	10
YEL	LOW PARKING	TURN SIGNAL - 10 DIODES	
STL43AB	STL43ABP	PL-3 connection, 12V	10
STL43A24B	STL43A24BP	PL-3 connection, 12-24V	10
STL43AKB	STL43AKBP	Kit with A45GB & A47PB, PL-3, 12V	10
	AC	CESSORIES	
A45GB	A45GBP	Grommet	50
A45PB	A45PBP	Pigtail, 3-wire PL-3	100
A47PB	A47PBP	Right angle pigtail, 3-wire PL-3	100
A45PMB	A45PMBP	Weathertight pigtail	100
AL45PWTB	AL45PWTBP	Weathertight to PL-3 adaptor	50
BK45BB	BK45BBP	Black steel bracket	10
A45BB	A45BBP	Black plastic flange	100
A45SB	A45SBP	Stainless steel mounting flange	20
A45CGB	A45CGBP	Chrome grommet cover	20
		RETAIL	
STL43RK	Retail Ready	12V kit with A45GB & A47PB, clam	6

FMVSS	Red S T I P2; Yellow I6 P	
MATERIALS	Polycarbonate lens and housing	
VOLT/AMP	Red: 12.8VDC360A Stop/Turn, .030A Tail	
	Yellow: 12.8VDC310A Turn, .046A Parking	
WT/DIMS	.265 lbs. / 4.313" x 4.313" x 1.938"	
WARRANTY	Lifetime LED Warranty	



STL42 SERIES

4" Round Sealed LED Lights with Mounting Flange

- · Sonically sealed, waterproof
- Flange mount for security, theft reduction
- Available with standard PL-3 or optional weathertight connection

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
F	RED STOP/TU	RN/TAIL LIGHT - 10 DIODES	
STL42RB	STL42RBP	Black flange, PL-3	10
STL42RMB	STL42RMBP	Black flange, weathertight	10
YEI	LLOW PARKIN	NG/TURN SIGNAL - 10 DIODES	
STL42AB	STL42ABP	Black flange, PL-3	10
STL42AMB	STL42AMBP	Black flange, weathertight	10
	Į.	ACCESSORIES	
A45PB	A45PBP	Pigtail, 3-wire PL-3	100
A47PB	A47PBP	Right angle pigtail, 3-wire PL-3	100
A45PMB	A45PMBP	Weathertight pigtail	100
AL45PWTB	AL45PWTBP	Weathertight to PL-3 adaptor	50
BK45BB	BK45BBP	Black steel bracket	10
A42FCB	A42FCBP	Chrome flange cover	100
A5TRSSB	A5TRSSBP	Stainless steel trim ring	100
A42GB	A42GBP	Mounting gasket, black	100
		RETAIL	
STL42RS	Retail Ready	Light only, clam	6

FMVSS	RedSTIF	Red S T I P2; Yellow I6 P		
MATERIALS	Polycarbon	Polycarbonate lens and housing		
VOLT/AMP	Red:	Red: 12.8VDC413 Stop/Turn, .026A Tai		
	Yellow:	12.8VDC310 Turn, .046A Parking		
WT/DIMS	.617 lbs. / 5	.617 lbs. / 5.5" x 5.5" x 1.938"		
WARRANTY	Lifetime LE	D Warranty		






STL42RB



STL42AB



A42GB











STL43RBX




STL43ABX

STL43 REFLEX FLANGE SERIES

4" Round Sealed LED Lights with Reflex Mounting Flange

- Sonically sealed, waterproof
- Flange mount for security, theft reduction
- Accepts standard PL-3 connector
- Reflex flange meets SAE A for reflector

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
R	RED STOP/TURN/TAIL LIGHT - 10 DIODES				
STL43RBX	STL43RBXP	Red reflex flange, gasket, PL-3	10		
STL43RBHX	STL43RBHXP	Red reflex flange, hard wire, gasket	10		
YEL	LOW PARKIN	NG/TURN SIGNAL - 10 DIODES			
STL43ABX	STL43ABXP	Yellow reflex flange, gasket, PL-3	10		
	ACCESSORIES				
A45PB	A45PBP	Pigtail, 3-wire PL-3	100		
A47PB	A47PBP	Right angle pigtail, 3-wire PL-3	100		
		RETAIL			
STL43ABXS	Retail Ready	Yellow light only, clam	6		
STL43RBXS		Red light only, clam	6		



HOLE CUT-OUT: 4.5"

FMVSS	Red S T I; Yellow I6 P; Reflex A		
MATERIALS	Polycarbona	Polycarbonate lens and housing	
VOLT/AMP	Red: 12.8VDC413 Stop/Turn, .026A Tail		
	Yellow:	12.8VDC310 Turn, .046A Parking	
WT/DIMS	.397 lbs. / 5.7	75" x 5.75" x 1.625"	
WARRANTY	Lifetime LED Warranty		



STL13 GROMMET MOUNT SERIES

FLEET Count™ 4" Round Sealed LED Stop/Turn/Tail Lights

- Sonically sealed, waterproof
- Available with standard PL-3, male pin, weathertight or hard wired connections
- Retail kit includes grommet and plug

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
1	RED STOP/TURN	I/TAIL - 7 DIODES	
STL13RB	STL13RBP	PL-3 connection	10
STL13R1224B	STL13R1224BP	PL-3 connection, 12/24V	10
STL13RMB	STL13RMBP	Weathertight connection	10
STL13RGB	STL13RGBP	Male pin connection	10
STL13RH1B	STL13RH1BP	Hard wired, PL-3 female plug	10
STL13RH3B	STL13RH3BP	Hard wired, .180 male bullets	10
STL13RHBB	STL13RHBBP	Hard wired	10
STL13RLVB	STL13RLVBP	PL-3 connection, low-voltage cut-off at 9V	10
STL13RMB10GK	STL13RMB10GKP	Kit: STL13RMB and A45GB grommet	10
STL13RKB	STL13RKBP	Kit: STL13RB, with A45GB grommet and A45PB plug, PL-3 connection	10
YELLO	OW PARKING/TU	RN SIGNAL - 7 DIODES	
STL13AB	STL13ABP	PL-3 connection	10
	ACCES	SORIES	
A45GB	A45GBP	Grommet	50
A45PB	A45PBP	Pigtail, 3-wire PL-3	100
A47PB	A47PBP	Right angle pigtail, 3-wire PL-3	100
A45PMB	A45PMBP	Weathertight pigtail	100
AL45PWTB	AL45PWTBP	Weathertight to PL-3 adaptor	50
BK45BB	BK45BBP	Black steel bracket	10
A45BB	A45BBP	Black plastic flange	100
A45SB	A45SBP	Stainless steel flange	20
A45CGB	A45CGBP	Chrome grommet cover	20
e e	RE'	TAIL	
STL13RK	Retail Ready	Kit with A45GB & A47PB, clam	6
STL13RS		Light only, clam	6
FMVSS	Red: S T I; Yellow: I6	P	
MATERIALS	Polycarbonate lens a	· · · · · · · · · · · · · · · · · · ·	
VOLT/AMP	12.8VDC234A Sto	•	
WT/DIMS	WT/DIMS STL13 grommet mount: .265 lbs. / 4.31" x 4.31" x 1.81"		











STL13RGB male pin connection




Lifetime LED Warranty

WARRANTY










STL13 FLANGE MOUNT SERIES

FLEET Count™ 4" Round Sealed LED Stop/Turn/Tail Lights

- Sonically sealed, waterproof
- Available with standard PL-3 and weathertight connections

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	RED STOP/T	URN/TAIL - 7 DIODES	
STL13RFB	STL13RFBP	Flange, PL-3	10
STL13RFMB	STL13RFMBP	Flange, weathertight	10
	AC	CESSORIES	
A45PB	A45PBP	Pigtail, 3-wire PL-3	100
A47PB	A47PBP	Right angle pigtail, 3-wire PL-3	100
A45PMB	A45PMBP	Weathertight pigtail	100
AL45PWTB	AL45PWTBP	Weathertight to PL-3 adaptor	50
		RETAIL	
STL13RFS	Retail Ready	Flange mount light only, clam	6
FMVSS MATERIALS VOLT/AMP WT/DIMS	•	lens and housing 4A Stop/Turn, .033A Tail mount: .275 lbs. / 5.5" x 5.5" x 1.938)")





STL13RFHXB SERIES

4" Round Surface Mount Sealed LED Lights with Reflex

Lifetime LED Warranty

- Sonically sealed, waterproof
- Multi-function: stop/turn/tail with reflex flange all in one light
- FMVSS compliant for under 80" applications
- Surface mount
- Hard wired

WARRANTY

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
RI	RED STOP/TURN/TAIL LIGHT - 7 DIODES			
STL13RFHXB	STL13RFHXBP	Hard wired, with reflex	10	
	ACC	CESSORIES		
A42GB	A42GBP	Mounting gasket, black	100	
FMVSS MATERIALS VOLT/AMP WT/DIMS WARRANTY				



STL413 SERIES


FLEET Count™ 4" Round Sealed LED Lights

- Sonically sealed, waterproof
- Mount in any 360° position
- Available in standard PL-3 or optional weathertight connection

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
F	RED STOP/TU	IRN/TAIL LIGHT - 4 DIODES	
STL413RB	STL413RBP	PL-3 connection	10
STL413RMB	STL413RMBP	Weathertight connection	10
	A	ACCESSORIES	
A45GB	A45GBP	Grommet	50
A45PB	A45PBP	Straight pigtail, 3-wire PL-3	100
A47PB	A47PBP	Right angle pigtail, 3-wire PL-3	100
A45PMB	A45PMBP	Weathertight pigtail, 3-wire	50
AL45PWTB	AL45PWTBP	Weathertight pigtail to PL-3	50
A45BB	A45BBP	Black mounting flange	100
A45SB	A45SBP	Stainless steel mounting flange	20
BK45BB	BK45BBP	Black steel bracket	10
A45CGB	A45CGBP	Chrome grommet cover	20
FMVSS MATERIALS VOLT/AMP WT/DIMS WARRANTY	12.8VDC	ate lens and housing 160A Stop/Turn, .008A Tail .313" x 4.313" x 1.625" D Warranty	







HOLE CUT-OUT: 4.5"

STL413RFHXB SERIES

FLEET Count™ 4" Round Sealed LED Light with Reflex Flange

- Sonically sealed, waterproof
- FMVSS compliant for over/under 80" applications
- · Surface mount, hard wired

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
RE	D STOP/TURN/1	TAIL LIGHT - 4 DIODES	
STL413RFHXB	STL413RFHXBP	Hard wired, with reflex	10

FMVSS S2 T2 I6 A

MATERIALS Polycarbonate lens and housing
VOLT/AMP 12.8VDC - .160A Stop/Turn, .008A Tail
WT/DIMS .25 lbs. / 5.625 x 5.625" x 0.75"

WARRANTY Lifetime LED Warranty







ONE





TOP

STL003RFLB



Locking PL-3 connection

STLOO3 SERIES

ONE™ LED 4" Round Sealed Lights

- · Sonically sealed, waterproof
- Mount in any 360° position
- Available in grommet and flange mount models with PL-3 and weathertight connections

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
F	RED STOP/TUR	N/TAIL LIGHT - 1 DIODE	
STL003RB	STL003RBP	PL-3 connection	50
STL003R1224B	STL003R1224BP	PL-3 connction, 12V/24V	50
STL003RMB	STL003RMBP	Weathertight connection	50
STL003RFB	STL003RFBP	Flange mount, PL-3 connection	10
STL003RFLB	STL003RFLBP	Flange mount, locking PL-3 connection	10
STL003RFMB	STL003RFMBP	Flange mount, weathertight connection	10
YEI	LLOW PARKIN	G/TURN SIGNAL - 1 DIODE	
STL003AB	STL003ABP	PL-3 connection	50
STL003A1224B	STL003A1224BP	PL-3 connection, 12V/24V	50
	AC	CESSORIES	
A45GB	A45GBP	PVC grommet, flush mount	50
A45PB	A45PBP	Straight pigtail, 3-wire PL-3	100
A47PB	A47PBP	Right angle pigtail, 3-wire PL-3	100
AL45PWTB	AL45PWTBP	Weathertight pigtail, plug to female PL-3	50
A45PMB	A45PMBP	Weathertight 3-wire pigtail, plug to bare wire	50
Fo	or more details on n	nounting and wiring accessories	

For more details on mounting and wiring accessories, see Accessories section at back of catalog.

7	_		
м.			

STL003RK STL003RS RETAIL

Kit with grommet and pigtail, clam

Light only, clam

6

FMVSS Red: S T I, Yellow: I P


MATERIALS Polycarbonate lens and housing
VOLT/AMP 12.8VDC - .25A Stop/Turn, .007A Tail

24.0VDC

WT/DIMS Grommet mount: .35 lbs. / 4.313" x 4.313" (depth varies)

Flange mount: .275 lbs. / 5.5" x 5.5" (depth varies)

WARRANTY Lifetime LED Warranty



Grommet mount, PL-3

STL23 SERIES

Miro-Flex™ 4" Round Sealed LED Lights

- Sonically sealed, waterproof
- Mount in any 360 degree position
- Accepts standard PL-3 plugs
- Available in 12V and 24V models

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
RED STOP/TURN/TAIL - 12 DIODES			
STL23RB	STL23RBP	PL-3 connection, 12V	10
STL23CCRB	STL23CCRBP	Clear lens, red reflector, PL-3, 12V	10
STL23R24B	STL23R24BP	PL-3 connection, 24V	10
YEL	LOW PARKIN	G/TURN SIGNAL - 16 DIODES	
STL23AB	STL23ABP	PL-3 connection, 12V	10
STL23A24B	STL23A24BP	PL-3 connection, 24V	10
ACCESSORIES			
A45GB	A45GBP	Grommet	50
A45PB	A45PBP	Pigtail, 3-wire PL-3	100
A47PB	A47PBP	Right angle pigtail, 3-wire PL-3	100
BK45BB	BK45BBP	Black steel bracket	10
A45BB	A45BBP	Black plastic flange	100
A45SB	A45SBP	Stainless steel flange	20
A45CGB	A45CGBP	Chrome grommet cover	20

FMVSS	Red S T I; Y	ellow I P	
MATERIALS	Polycarbonate lens and housing		
VOLT/AMP	Red: Yellow:	12.8VDC208 Stop/Turn, .013A Tail 24.0VDC171 Stop/Turn, .061A Tail 12.8VDC310 Turn, .046A Parking 24.0VDC171 Stop/Turn, .061A Tail	
WT/DIMS WARRANTY	.265 lbs. / 4. Lifetime LED	313" x 4.313" x 1.938"	















HYPERX



Sonically sealed, waterproof

STL543 SERIES


• Mount in any 360 degree position

LED Stop/Turn/Tail Light

HyperX® 4" Round Sealed

- Accepts standard PL-3 plugs
- 12 diodes and contemporary, automotive style optics

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	RED STOP/	TURN/TAIL - 12 DIODES	
STL543RB	STL543RBP	PL-3 connection	10
	A	CCESSORIES	
A45GB	A45GBP	Grommet	50
A45PB	A45PBP	Pigtail, 3-wire PL-3	100
A47PB	A47PBP	Right angle pigtail, 3-wire PL-3	100
BK45BB	BK45BBP	Black steel bracket	10
A45BB	A45BBP	Black plastic flange	100
A45SB	A45SBP	Stainless steel flange	20
A45CGB	A45CGBP	Chrome grommet cover	20



FMVSS	STI
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC208 Stop/Turn, .013A Tail
WT/DIMS	.265 lbs. / 4.313" x 4.313" x 1.938"
WARRANTY	Lifetime LED Warranty

STL55 SERIES

BULK P/N

High LED Count 4" Round Sealed **Lights for Recess Mount**

- Sonically sealed, waterproof
- 21 LEDs for high diode count appearance
- Mount in any 360 degree position
- Accepts standard PL-3 plugs; red available with optional weathertight connection

POLYPACK P/N DESCRIPTION



QTY


STL55RB








RED STOP/TURN/TAIL - 21 DIODES			
STL55RB	STL55RBP	Grommet mount, PL-3 connection	10
STL55RMB	STL55RMBP	Flange mount, weathertight connection	10
STL55RFMB	STL55RFMBP	Flange mount, weathertight connection	10
YEL	LOW PARKIN	G/TURN SIGNAL - 21 DIODES	
STL55AB	STL55ABP	Grommet mount, PL-3 connection	10
	A	CCESSORIES	
A45GB	A45GBP	Grommet	50
A45PB	A45PBP	Pigtail, 3-wire PL-3	100
A47PB	A47PBP	Right angle pigtail, 3-wire PL-3	100
A45PMB	A45PMBP	Weathertight pigtail	100
AL45PWTB	AL45PWTBP	Weathertight to PL-3 adaptor	50
BK45BB	BK45BBP	Black steel bracket	10
A45BB	A45BBP	Black plastic flange	100
A45SB	A45SBP	Stainless steel flange	20
A45CGB	A45CGBP	Chrome grommet cover	20
FMVSS	Red S T I;	Yellow I6 P	

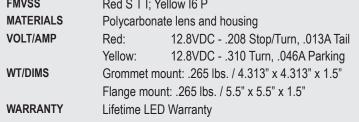



















STL602RB



STL602 SERIES

LightGuide™ LED 6" Stop/Turn/Tail Light

- Central X-shaped feature illuminates for tail light function
- Surrounding diodes light for stop and turn functions
- Sonically sealed, waterproof
- Grommet mount
- Accepts industry standard PL-3 connector

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
RED	STOP/TURN/T	AIL LIGHT - 12 DIODES	
STL602RB	STL602RBP	PL-3 connection	10
	ACCE	ESSORIES	
A70GB	A70GBP	Grommet	50
A45PB	A45PBP	Pigtail, 3-wire	100
A47PB	A47PBP	Right angle pigtail, 3-wire	100
BK70BB	BK70BBP	Black steel bracket	10
A77S1B	A77S1BP	Gray, flat design steel bracket	50
	00.70.10		
FMVSS	S2 T2 I6		
MATERIALS	Polycarbonate ler	ns and housing	
VOLT/AMP	12.8VDC421A Stop/Turn, .114A Tail		
WT/DIMS	.375 lbs. / 6.5" x 2	2.28" x 1.80"	
WARRANTY	Lifetime LED War	ranty	

STL111 GROMMET MOUNT SERIES

GloLight® 6" Sealed LED Lights



PATENTED TECHNOLOGY

- · Sonically sealed, waterproof
- Mount in any 360 degree position
- Available in tinted and clear lens models
- Available with standard PL-3 or optional weathertight connection



BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
RED STOP/TURN/TAIL LIGHT - 22 DIODES				
STL111RB	STL111RBP	PL-3 connection	10	
STL111R1224B	STL111R1224BP	PL-3 connection, 12/24V	10	
STL111RMB	STL111RMBP	Weathertight	10	
STL111RHB	STL111RHBP	Hard wired	10	
STL111RCB	STL111RCBP	Clear lens, red diodes, PL-3	10	
STL111RCMB	STL111RCMBP	Clear lens, red diodes, weathertight	10	
YEL	LOW PARKING/	TURN SIGNAL - 22 DIODES		
STL111AB	STL111ABP	PL-3	10	
STL111ACB	STL111ACBP	Clear lens, yellow diodes, PL-3	10	
	ACC	ESSORIES		
A70GB	A70GBP	Grommet	50	
A45PB	A45PBP	Pigtail, 3-wire	100	
A47PB	A47PBP	Right angle pigtail, 3-wire	100	
A45PMB	A45PMBP	Weathertight pigtail	100	
AL45PWTB	AL45PWTBP	Weathertight to PL-3 adaptor	50	
BK70BB	BK70BBP	Black steel bracket	10	
A77S1B	A77S1BP	Gray, flat design steel bracket	50	
		RETAIL		
TLL112RK (Retail Ready	Try Me kit with (2) ea. STL111RB, A70GB and A47PB, clam	2	
FMVSS	Red S2 T2 I6; Yell	ow 16 P		
MATERIALS	Polycarbonate len	•		
VOLT/AMP	Red: 12.8VI	DC59A Stop/Turn, .295A Tail		



STL111RCB




STL111AB



STL111ACB



TLL112RK



.35 lbs. / 6.5" x 2.25" x 1.75"

Lifetime LED Warranty

12.8VDC - .515A Turn, .27A Parking



Yellow:

WT/DIMS

WARRANTY



GloLight[®]

<u>g</u>

TAIL LIGHT

STOP/

TURN

STL111 FLANGE MOUNT SERIES

GloLight® 6" Sealed LED Lights with Mounting Flange




STL111RFB

- · Sonically sealed, waterproof
- Recess flange mount for security, theft reduction
- · Available in tinted and clear lens models
- Available with standard PL-3 or optional weathertight connection



BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
RED STOP/TURN/TAIL LIGHT - 22 DIODES				
STL111RFB	STL111RFBP	PL-3 connection	10	
STL111RFMB	STL111RFMBP	Weathertight connection	10	
STL111RCFB	STL111RCFBP	Clear lens, red diodes, PL-3	10	
STL111RCFMB	STL111RCFMBP	Clear lens, red diodes, weathertight	10	
	ACCE	SSORIES		
A45PB	A45PBP	Pigtail, 3-wire	100	
A47PB	A47PBP	Right angle pigtail, 3-wire	100	
A45PMB	A45PMBP	Weathertight pigtail	100	
AL45PWTB	AL45PWTBP	Weathertight to PL-3 adaptor	50	
BK70BB	BK70BBP	Black steel bracket	10	
A77S1B	A77S1BP	Gray, flat design steel bracket	50	
A111TRSSB	A111TRSSBP	Stainless steel trim ring	50	

FMVSS	Red S2 T2 I6
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC59 Stop/Turn, .295A Tail
WT/DIMS	.38 lbs. / 7.5" x 3.3" x 1.938"
WARRANTY	Lifetime LED Warranty



HOLE CUT-OUT: 6.85" X 2.5" (1.25" R)

STL178 SERIES

GloLight® 6" Sealed LED Stop/Turn/Tail Lights for Surface Mount

PATENTED TECHNOLOGY

BULK P/N

- Sonically sealed, waterproof
- Mount in any 360 degree position
- Flange surface mount—no panel cut-out required
- Hard wired, with optional molded connectors
- Available in tinted and clear lens models

POLYPACK P/N






QTY




GloLight

STL178RB

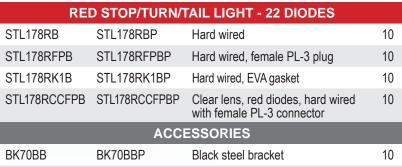

DESCRIPTION

ACCESSORIES			
BK70BB	BK70BBP	Black steel bracket	10
A77S1B	A77S1BP	Gray, flat design steel bracket	50
A178TRSSB	A178TRSSBP	Stainless steel trim ring	50




MATERIALS Polycarbonate lens and housing
VOLT/AMP 12.8VDC - .59 Stop/Turn, .295A Tail

WT/DIMS .38 lbs. / 7.5" x 3.3" x 1.1"
WARRANTY Lifetime LED Warranty





STL178RCCFPB


















STL512RCB



STL512 SERIES HD500™ 6" Sealed LED Lights

- Sonically sealed, waterproof
- Mount in any 360° position
- Available in tinted and clear lens models

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
RE	ED STOP/TURN	I/TAIL LIGHT - 18 DIODES	
STL512RB	STL512RBP	PL-3 connection	10
STL512RCB	STL512RCBP	Weathertight connection	10
ACCESSORIES			
A70GB	A70GBP	Grommet	50
A45PB	A45PBP	Pigtail, 3-wire	100
A47PB	A47PBP	Right angle pigtail, 3-wire	100
A77S1B	A77S1BP	Gray, flat design steel bracket	50
BK70BB	BK70BBP	Black steel bracket	10

FMVSS	STI
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC294A Stop/Turn, .024A Tail
WT/DIMS	.262 lbs. / 6.50" x 2.313" x 1.84"
WARRANTY	Lifetime LED Warranty

STL72/82 SERIES

6" Oval Sealed LED Lights

- Sonically sealed, waterproof
- · Kits include grommet and plug
- Mount in any 360 degree position
- Available with standard PL-3 or optional weathertight connection

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
RED STOP/TURN/TAIL LIGHT - 10 DIODES				
STL72RB	STL72RBP	PL-3 connection	10	
STL72R1224B	STL72R1224BP	PL-3 connection, 12V/24V	10	
STL72RKB	STL72RKBP	Kit with A70GB, PL-3	10	
STL74RBK	STL74RBKP	Kit with A70GB & A47PB, PL-3	50	
STL74RKB	STL74RKBP	Kit with A70GB & A45PB, PL-3	10	
STL72RMB	STL72RMBP	Weathertight connection	10	
STL82RCB	STL82RCBP	Clear lens, red diodes, PL-3	10	
YELL	.OW PARKING/	TURN SIGNAL - 10 DIODES		
STL72AB	STL72ABP	PL-3	10	
STL72AMB	STL72AMBP	Weathertight connection	10	
STL72CAB	STL72CABP	Clear lens, amber diodes, PL-3	10	
	ACC	CESSORIES		
A70GB	A70GBP	Grommet	50	
A45PB	A45PBP	Pigtail, 3-wire PL-3	100	
A47PB	A47PBP	Right angle pigtail, 3-wire PL-3	100	
A45PMB	A45PMBP	Weathertight pigtail	100	
AL45PWTB	AL45PWTBP	Weathertight to PL-3 adaptor	50	
BK70BB	BK70BBP	Black steel bracket	10	
A77S1B	A77S1BP	Gray, flat design steel bracket	50	
	RETAIL			
STL72RK		12V kit with A70GB & A47PB, clam	6	
STL72RS	Retail Ready	12V, clam	6	

FMVSS	Red S2 T	Red S2 T2 I6; Yellow I6 P	
MATERIALS	Polycarbo	onate lens and housing	
VOLT/AMP	Red:	12.8VDC243A Stop/Turn, .046A Tail	
	Yellow:	12.8VDC275A Turn, .042A Parking	
WT/DIMS	.309 lbs.	/ 6.438" x 2.313" x 1.75"	
WARRANTY	Lifetime L	.ED Warranty	







STL72RB





STL82RCB






STL72AB





STL72CAB



HOLE CUT-OUT: 6.85" X 2.5" (1.25" R)











STL78RB






STL88RCB





STL78AB



STL78/88 SERIES 6" Oval Sealed LED Lights for Surface Mount

- Sonically sealed, waterproof
- Mount in any 360 degree position
- Flange surface mount-no panel cut-out required
- Hard wired, with optional molded connectors

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
RE	D STOP/TURN	/TAIL LIGHT - 10 DIODES	
STL78RB	STL78RBP	Hard wired	10
STL78RPG	STL78RPGP	.180 male bullets	10
STL78REZB	STL78REZBP	3-way female PL-3 plug	10
STL78RLPB	STL78RLPBP	Low profile 9/16" thick, female PL-3 plug, gasket included	10
STL88RCB	STL88RCBP	Clear lens, red diodes, hard wired	10
STL88RCPG	STL88RCPGP	Clear lens, red diodes, 3-way female PL-3 plug	10
STL88RC1PG	STL88RC1PGP	Clear lens, red diodes, hard wired .180 male bullets	10
STL88RCBPG	STL88RCBPBP	Clear lens, red diodes, hard wired .180 female bullets	10
YELLOW PARKING/TURN SIGNAL - 10 DIODES			
STL78AB	STL78ABP	Hard wired	10
ACCESSORIES			
A78CB1	A78CB1P	Chrome flange cover	25
A78RXB	A78RXBP	Red reflex flange cover & gasket	25
RETAIL			
STL78RK	Retail Ready	Single light, clam	6

FMVSS	Red S2 T2 I6 P3; Yellow I6 P	
MATERIALS	Polycarbonate lens and housing	
VOLT/AMP	Red: 12.8VDC243	A Stop/Turn, .046A Tail
	Yellow: 12.8VDC275	iA Turn, .042A Parking
WT/DIMS	STL78/88:.265 lbs. / 7.563'	" x 3.313" x 0.750"
	STL78RLPB: .260 lbs. / 7.563" x 3.313" x .563"	
WARRANTY	Lifetime LED Warranty	

STL12 SERIES

BULK P/N

STL12RS

TLL12RK

FMVSS

MATERIALS

VOLT/AMP

WARRANTY

WT/DIMS

FLEET Count™ 6" Oval Sealed LED Stop/Turn/Tail Lights

- Sonically sealed, waterproof
- Available with standard PL-3 or optional weathertight connection

POLYPACK P/N

· Retail kit includes light, grommet and plug

RED STOP/TURN/TAIL - 6 DIODES				
STL12RB	STL12RBP	PL-3 connection	10	
STL12R1224B	STL12R1224BP	PL-3 connection, 12/24V	10	
STL12RMB	STL12RMBP	Weathertight connection	10	
STL12RKB	STL12RKBP	Kit: STL12RB, A45PB, & A70GB	10	
STL12RK2B	STL12RK2BP	Kit: STL12RB, A45PB, & A60GB	10	
STL12RK3B	STL12RK3BP	Kit: STL12RB, A70GB	10	
STL12RK4B	STL12RK4BP	Kit: STL12RB, A70GB, .156 female bullets	10	
STL12RLVB	STL12RLVBP	PL-3 connection, low voltage cuttoff at 9V	10	
STL12RCB	STL12RCBP	Clear lens, red diodes, PL-3 connection	10	
STL12RCKB	STL12RCKBP	Clear lens, red diodes kit: STL12RCB, A45PB, A70GB	10	
YELLOW PARKING/TURN SIGNAL - 6 DIODES				
STL12AB	STL12ABP	PL-3 connection	10	
	AC	CESSORIES		
A70GB	A70GBP	Grommet	50	
A45PB	A45PBP	Pigtail, 3-wire PL-3	100	
A47PB	A47PBP	Right angle pigtail, 3-wire PL-3	100	
A45PMB	A45PMBP	Weathertight pigtail	100	
AL45PWTB	AL45PWTBP	Weathertight to PL-3 adaptor	50	
BK70BB	BK70BBP	Black steel bracket	10	
A77S1B	A77S1BP	Gray, flat design steel bracket	50	
A78CB1	A78CB1P	Chrome flange cover	25	
A78RXB	A78RXBP	Red reflex flange cover & gasket	25	
		RETAIL		
STL12RK		Kit with A70GB & A47PB, clam	6	

Light only, clam

A45PB, clam

Red: STI; Yellow: I6P

Lifetime LED Warranty

Polycarbonate lens and housing

.375 lbs. / 6.5" x 2.25" x 1.75"

12.8VDC - .161A Stop/Turn, .007A Tail

Kit with (2) each STL12RB, A70GB &

DESCRIPTION





QTY

6

2

STL12RB



STL12AB



STL12RCB



TLL12RK





HOLE CUT-OUT: 6.85" X 2.5" (1.25" R)









STL73RB

STL73 SERIES

FLEET Count™ 6" Oval Sealed LED Stop/Turn/Tail Lights

- Sonically sealed, waterproof
- Flange surface mount is hard wired requiring no panel cut-out; includes ground






STL73RCB



A78CB1



BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
RED STOP/TURN/TAIL - 6 DIODES				
STL73RB	STL73RBP	Flange surface mount, hard wired	10	
STL73RKB	STL73RKBP	Light with A73GB gasket	100	
STL73REZB	STL73REZBP	Flange surface mount, hard wired with PL-3 female plug	10	
STL73RCB	STL73RCBP	Clear lens, red diodes, flange surface mount, hard wired	10	
	A	CCESSORIES		
BK70BB	BK70BBP	Black steel bracket	10	
A77S1B	A77S1BP	Gray, flat design steel bracket	50	
A78CB1	A78CB1P	Chrome flange cover	25	
A78RXB	A78RXBP	Red reflex flange cover & gasket	25	
	RETAIL			
STL73RK	Retail Ready	Kit with STL73RB and A78CB1, clam	6	

FMVSS	STI
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC161A Stop/Turn, .007A Tail
WT/DIMS	.287 lbs. / 7.563" x 3.263" x 0.75"
WARRANTY	Lifetime LED Warranty

STL412 SERIES

FLEET Count™ 6" Sealed LED Lights

- Sonically sealed, waterproof
- Mount in any 360° position
- · Accepts standard PL-3 connector


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
RE	D STOP/TURN/	TAIL LIGHT - 4 DIODES	
STL412RB	STL412RBP	PL-3 connection	10
	ACCE	ESSORIES	
A70GB	A70GBP	Grommet	50
A45PB	A45PBP	Pigtail, 3-wire	100
A47PB	A47PBP	Right angle pigtail, 3-wire	100
BK70BB	BK70BBP	Black steel bracket	10
A77S1B	A77S1BP	Gray, flat design steel bracket	50
FMVSS MATERIALS VOLT/AMP WT/DIMS WARRANTY	S T I Polycarbonate len 12.8VDC161A 3 .375 lbs. / 6.438" 3	Stop/Turn, .007A Tail < 2.313" x 1.75"	







STL412RB







ONE



STL002RB



STL002RFB



STL002AB





TLL002RK

STL002 SERIES ONE™ LED 6" Sealed Lights

- · Sonically sealed, waterproof
- Mount in any 360 degree position
- Available in grommet and flange mount models

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
R	ED STOP/TUR	N/TAIL LIGHT - 1 DIODE	
STL002RB	STL002RBP	PL-3 connection	50
STL002RK2B	STL002RK2BP	Kit with A60GB and A45PB, PL-3	10
STL002RMB	STL002RMBP	Weathertight connection	50
STL002RFB	STL002RFBP	Flange mount, PL-3 connection	10
YEL	LOW PARKING	G/TURN SIGNAL - 1 DIODE	
STL002AB	STL002ABP	PL-3 connection	50
	AC	CESSORIES	
A70GB	A70GBP	Grommet	50
A45PB	A45PBP	Pigtail, 3-wire PL-3	100
A47PB	A47PBP	Right angle pigtail, 3-wire PL-3	100
A45PMB	A45PMBP	Weathertight pigtail	100
AL45PWTB	AL45PWTBP	Weathertight to PL-3 adaptor	50
BK70BB	BK70BBP	Black steel bracket	10
A77S1B	A77S1BP	Gray, flat design steel bracket	50
		RETAIL	
STL002RK	Retail Ready	Kit with grommet and plug, clam	6
STL002RS		Grommet mount light only, clam	6
TLL002RK	Set with (2) each	STL002RB, A70GB and A47PB, clam	2
FMVSS	Red: S2 T2 I6,	Yellow: I6 P	
MATERIALS	Polycarbonate	lens and housing	
VOLT/AMP	12.8VDC25A	Stop/Turn, .007A Tail	
WT/DIMS		tt: .262 lbs. / 6.50" x 2.313" x 1.875"	
	ŭ	.262 lbs. / 7.563" x 3.313" x 1.125"	
WARRANTY	Lifetime LED W	arranty arranty	





NO PANEL CUT-OUT REQUIRED


STL22 SERIES

Miro-Flex™ 6" Oval Sealed LED Lights

- · Sonically sealed, waterproof
- Mount in any 360 degree position
- Accepts standard PL-3 plugs
- Available with tinted or clear lens and chrome or tinted reflector

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	RED STOP/	TURN/TAIL - 12 DIODES		
STL22RB	STL22RBP	PL-3 connection	10	
STL22RBH	STL22RBHP	Hard wired	10	
STL22CCRB	STL22CCRBP	Clear lens, red reflector, PL-3	10	
STL22RCB	STL22RCBP	Clear lens, PL-3	10	
YEL	YELLOW PARKING/TURN SIGNAL - 16 DIODES			
STL22AB	STL22ABP	PL-3 connection	10	
STL22CCAB	STL22CCABP	Clear lens, yellow reflector, PL-3	10	
	A	CCESSORIES		
A70GB	A70GBP	Grommet	50	
A45PB	A45PBP	Pigtail, 3-wire PL-3	100	
A47PB	A47PBP	Right angle pigtail, 3-wire PL-3	100	
BK70BB	BK70BBP	Black steel bracket	10	
A77S1B	A77S1BP	Gray, flat design steel bracket	50	

Red S T I; Yellow I P		
Polycarbonate lens and housing		
Red: 12.8VDC161 Stop/Turn, .009A Tail		
Yellow: 12.8VDC181 Turn, .023A Parking		
.397 lbs. / 6.5" x 2.313" x 2.188"		
Lifetime LED Warranty		
	Red: 12.8VDC161 Stop/Turn, .009A Tail Yellow: 12.8VDC181 Turn, .023A Parking	







STL22RB



STL22CCRB



STL22RCB



STL22AB



STL22CCAB






HYPERX



STL572RB



STL572AB



STL572 SERIES

HyperX® 6" Oval Sealed LED Lights

- Sonically sealed, waterproof
- Accepts standard PL-3 plugs

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	RED STOP/	TURN/TAIL - 12 DIODES	
STL572RB	STL572RBP	PL-3 connection	10
YEL	LOW PARKIN	G/TURN SIGNAL - 12 DIODES	
STL572AB	STL572ABP	PL-3 connection	10

FMVSS Red S T I; Yellow I P

MATERIALS Polycarbonate lens and housing

VOLT/AMP Red: 12.8VDC - .174 Stop/Turn, .007A Tail

Yellow: 12.8VDC - .261 Turn, .013A Parking

WT/DIMS .331 lb. / 6.438" x 2.313" x 1.75"

WARRANTY Lifetime LED Warranty






STL70RB



STL70AB



STL70 SERIES

A77S1B

High Diode Count 6" Oval Sealed LED Lights

- Sonically sealed, waterproof
- 48-56 LEDs for high diode count appearance
- Accepts standard PL-3 plugs

A77S1BP



50

		0,	
BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	RED STOP	/TURN/TAIL - 48 DIODES	
STL70RB	STL70RBP	PL-3 connection	10
YEL	LOW PARKIN	NG/TURN SIGNAL - 56 DIODES	
STL70AB	STL70ABP	PL-3 connection	10
FMVSS MATERIALS VOLT/AMP WT/DIMS WARRANTY	Polycarbo Red: Yellow: .353 lbs. /	P2; Yellow I P2 P mate lens and housing 12.8VDC362 Stop/Turn, .013A Tail 12.8VDC400 Turn, .046A Parking 6.5" x 2.25" x 1.125" ED Warranty	
	STL572 &	STL70 ACCESSORIES	
A70GB	A70GBP	Grommet	50
A45PB	A45PBP	Pigtail, 3-wire PL-3	100
A47PB	A47PBP	Right angle pigtail, 3-wire PL-3	100
BK70BB	BK70BBP	Black steel bracket	10

Gray, flat design steel bracket

STL175 SERIES

GloLight® 6" Oval Sealed LED E Rated Mid-Ship Turn Signal and Intermediate Marker Light

PATENTED TECHNOLOGY

- · Sonically sealed, waterproof
- SAE "E" compliant—meets California requirements for mid-ship turn signal on vehicles 30 feet or longer
- Weathertight connection standard

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	E RATE	ED - 10 DIODES		
STL175AMFB	STL175AMFBP	Weathertight connection	10	
	ACCESSORIES			
A45PMB	A45PMBP	Weathertight pigtail	100	
AL45PWTB	AL45PWTBP	Weathertight to PL-3 adaptor	50	
BK70BB	BK70BBP	Black steel bracket	10	
A77S1B	A77S1BP	Gray, flat design steel bracket	50	
A7TRSSB	A7TRSSBP	Stainless steel flange cover	20	

FMVSS	E P2
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC59 Stop/Turn, .11A Marker
WT/DIMS	.35 lbs. / 7.875" x 3.33" x 2.52"
WARRANTY	Lifetime LED Warranty








Marker



STL175AMFB Turn













STL71AMB






HOLE CUT-OUT: 6.85" X 2.5" (1.25" R)





STL75AMFB



HOLE CUT-OUT: 6.85" X 2.5" (1.25" R)

STL71/75 SERIES

6" Oval Sealed LED E Rated Mid-Ship Turn Signal and Intermediate Marker Light

- · Sonically sealed, waterproof
- SAE "E" compliant—meets California requirements for mid-ship turn signal on vehicles 30 feet or longer
- Weathertight connection standard

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	E RATI	ED - 10 DIODES	
STL71AMB	STL71AMBP	Weathertight connection	10
STL71AKMB	STL71AKMBP	Kit: STL71AMB, A70GB	10
STL75AMFB	STL75AMFBP	Flange, weathertight connection	10
	AC	CESSORIES	
A70GB	A70GBP	Grommet	50
A45PMB	A45PMBP	Weathertight pigtail	100
AL45PWTB	AL45PWTBP	Weathertight to PL-3 adaptor	50
BK70BB	BK70BBP	Black steel bracket	10
A77S1B	A77S1BP	Gray, flat design steel bracket	50
A7TRSSB	A7TRSSBP	Stainless steel flange cover	20

FMVSS	 P2
FIVI V SS	 P_{I}

WATERIALS Polycarbonate lens and housing
VOLT/AMP 12.8VDC - .201A Turn, .054 Marker

WT/DIMS Grommet Mount: .309 lbs. / 6.5" x 2.375" x 2.5"


Flange Mount: .309 lbs. / 7.875" x 3.313" x 2.5"

WARRANTY Lifetime LED Warranty

STL75 SERIES

6" Oval Sealed LED E2 Rated Mid-Ship Turn Signal and Intermediate Marker Light

- Sonically sealed, waterproof
- "E2" rated for vehicles less than 30 feet in length
- Available with standard PL-3 or optional weathertight connection

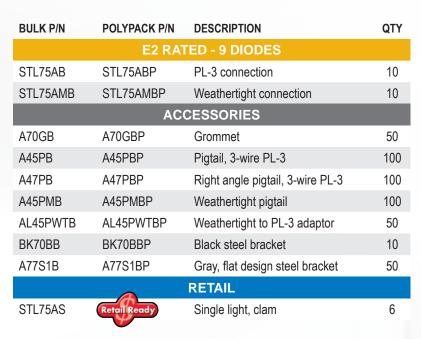


FMVSS	A E2 P2
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC141A Turn, .060 Marker
WT/DIMS	PL-3 Connection: .309 lbs. / 6.5" x 2.313" x 2.75"
	Weathertight: .309 lbs. / 6.5" x 2.313" x 2.58"
WARRANTY	Lifetime LED Warranty





STL75AB



HOLE CUT-OUT: 6.85" X 2.5" (1.25" R)












STL33 SERIES

Sealed Rectangular LED Stop/Turn/Tail Lights

- Sonically sealed, waterproof
- Accepts standard PL-3 plugs

١	BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
i	RED STOP/TURN/TAIL - 12 DIODES			
	STL33RB	STL33RBP	Grommet mount, PL-3 connection	10
	STL34RB	STL34RBP	Kit: STL33RB, A33GB & A45PB	10
	ACCESSORIES			
	A33GB	A33GBP	Grommet	50
	A45PB	A45PBP	Pigtail, 3-wire PL-3	100
	A47PB	A47PBP	Right angle pigtail, 3-wire PL-3	100



HOLE CUT-OUT: 5.453" X 3.578" (1" R)

FMVSS	S2 T2 I6
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC405 Stop/Turn, .038A Tail
WT/DIMS	.309 lbs. / 5.313" x 3.438" x 1.938"
WARRANTY	Lifetime LED Warranty




STL35 SERIES

Sealed Rectangular LED Lights

- Sonically sealed, waterproof
- Accepts standard PL-3 plugs
- Available in red and amber
- Miro-Flex[™] combines smooth lens and faceted reflector design for a contemporary automotive appearance

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
RED STOP/TURN/TAIL - 16 DIODES			
STL35RB	STL35RBP	PL-3 connection	10
STL24RB	STL24RBP	PL-3 connection, 12-24V	10
STL35CCRB	STL35CCRBP	Clear lens, red diodes, PL-3 connection	10
YEL	LOW PARKIN	IG/TURN SIGNAL - 16 DIODES	
STL35AB	STL35ABP	PL-3 connection	10
STL24AB	STL24ABP	PL-3 connection, 12-24V	10
STL35ACB	STL35ACBP	Clear lens, yellow diodes, PL-3 connection	10
	A	CCESSORIES	
A33GB	A33GBP	Grommet	50
A45PB	A45PBP	Pigtail, 3-wire PL-3	100
A47PB	A47PBP	Right angle pigtail, 3-wire PL-3	100

FMVSS	STL35RB:	S2 T2 I6
	STL35AB:	16 P
MATERIALS	Polycarbona	ate lens and housing
VOLT/AMP	STL35RB:	12.8VDC301 Stop/Turn, .020A Tail
	STL35AB:	12.8VDC301 Turn, .020A Parking
WT/DIMS	.309 lbs. / 5.	313" x 3.438" x 2.313"
WARRANTY	Lifetime LED) Warranty







STL35RB



STL35CCRB



STL35AB










STL63 SERIES

Thinline LED Stop/Turn/Tail Lights



- Sonically sealed, waterproof
- Low profile design—only 5/8" thick
- Surface mount on 14-1/8" centers
- Hard wired with separate ground wire
- Available with tinted or clear lens



STL63CRB

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
RED	STOP/TURN/TAI	L LIGHTS - 9 DIODES	
STL63RB	STL63RBP	Red	10
STL63CRB	STL63CRBP	Clear lens, red diodes	10
FMVSS	STI		
MATERIALS	Polycarbonate I	ens and housing	
VOLT/AMP	12.8VDC350	Stop/Turn, .022A Tail	
WT/DIMS	.275 lbs. / 15" x	1.625" x .75"	
WARRANTY	Lifetime LED W	arranty	

STL69 SERIES

Thinline Sealed LED Stop/Turn/Tail Lights

- Sonically sealed, waterproof
- Low profile design—only 5/8" thick
- Surface mount on 14-1/8" centers; optional gasket
- STL69RRXB meets SAE S2T2I6 for over 80" wide vehicles and has built-in reflex meeting SAE A
- Hard wired with separate ground wire; available with optional molded plugs





STL69RB



STL69RCB




STL	69	R	RX
-----	----	---	----

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
RE	D STOP/TURN/TA	AIL LIGHTS - 11 DIODES	
STL69RB	STL69RBP	Red, hard wired	10
STL69RPG	STL69RPGP	Red, .180 molded bullets	10
STL69R2PG	STL69R2PGP	Red, .156 molded barrels	10
STL69RCB	STL69RCBP	Clear lens, red diodes	10
STL69CRPG	STL69CRPGP	Clear lens, red diodes, .180 male bullets	10
STL69RRXB	STL69RRXBP	Built-in reflex	10
STL69RRXBPG	STL69RRXBPGP	Red, hard wired, .156 female barrels	10
STL69RRXPG	STL69RRXPGP	Red, hard wired .180 male bullets	10
	ACCE	SSORIES	
A69GB	A69GBP	Gasket	10
A69CB	A69CBP	Chrome base for STL69	10
A69RXCB	A69RXCBP	Chrome base for STL69RRXB	10
	R	ETAIL	
STL69RS		STL69RB light only, clam	6
STL69RK	Retail Ready	STL69RB with A69CB, clam	6


STL69RRXB with A69RXCB, clam

6




STL69RB/RCB





FMVSS	STL69:	STI
	STL69RRXB:	S2 T2 I6 A
MATERIALS	Polycarbonate	lens and housing
VOLT/AMP	STL69:	.350A Stop, .022 Tail
	STL69RRXB:	.161A Stop, .013A Tail
WT/DIMS	STL69:	.441 lbs. / 15" x 1.375" x .625"
	STL69RRXB:	.445 lbs. / 15" x 1.625" x .625"
WARRANTY	Lifetime LED V	Varranty





STL69RRXCS





STL179 SERIES

GloLight® Streamline LED Light



STL179RB

PATENTED TECHNOLOGY

- Sonically sealed, waterproof
- Low profile design—only 1-3/8" high x 1" thick
 - Surface mount on 16-1/8" centers
- Hard wired with separate ground wire


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	TURN/TAIL - 28 DIODES		
STL179RB	STL179RBP	Stop/turn/tail light	10
	CCESSORIES		
A79CB	A79CBP	Chrome mounting base	10



A79CB

FMVSS MATERIALS Polycarbonate lens and housing VOLT/AMP 12.8VDC - .634 Stop/Turn, .445A Tail WT/DIMS .353 lbs. / 17" x 1.375" x 1"

Lifetime LED Warranty

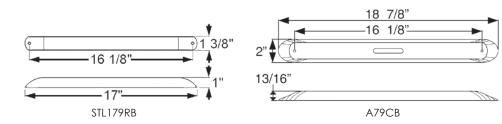

WARRANTY

STL79 SERIES

Streamline Sealed LED Lights






STL79RB/80RB



STL89RCB

- Sonically sealed, waterproof
- Low profile design—only 1-3/8" high x 1" thick
- Surface mount on 16-1/8" centers
- · Available as stop/turn/tail lights and third brake lights
- · Hard wired with separate ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	RED STOP/	TURN/TAIL - 11 DIODES	
STL79RB	STL79RBP	Stop/turn/tail light, hard wired	10
STL79RPG	STL79RPGP	Stop/turn/tail light, .180 male bullets	10
STL80RB	STL80RBP	Third brake light, hard wired	10
STL89RCB	STL89RCBP	Clear lens stop/turn/tail light, hard wired	10
	A	CCESSORIES	
A79CB	A79CBP	Chrome mounting base	10
		RETAIL	
STL79RS	Retail Ready	Stop/turn/tail light, clam	6
FMVSS	STL79/89:	STI	
	STL80:	U	
MATERIALS	Polycarbor	nate lens and housing	
VOLT/AMP	STL79/89:	'	
WT/DIMS	STL80:	12.8VDC216 Stop 17" x 1.375" x 1"	
WARRANTY	.000.00.7	ED Warranty	
MAINTAINT	Lifetille LL	.b wanany	
			*
	(0	•)1	3/8"








STL76 SERIES

Thinline Sealed LED
Stop/Turn/Tail Light for Over 80"
Wide Applications

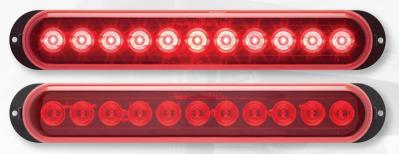

STL76RB

PATENTED TECHNOLOGY

- Replaceable, snap-on red lens
- Clear lens sonically sealed to housing making light completely waterproof
- Surface mount on 12-7/8" centers
- Meets SAE S2T2I6 for over 80" wide vehicles
- Hard wired with separate ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
1	RED STOP/TUR	N/TAIL LIGHT - 11 DIODES	
STL76RB	STL76RBP	Stop/turn/tail light	10


FMVSS S2 T2 I6

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8V / .275A Stop, .022A Tail

WT/DIMS .529 lbs. / 13.26" x 2.13" x 1.42"

WARRANTY Lifetime LED Warranty



STL59 SERIES

Thinline Sealed LED Stop/Turn/Tail Lights

- Sonically sealed, waterproof
- Low profile design-only 1/2" thick
- Surface mount on 11-3/4" centers
- Hard wired with separate ground wire







STL59RCB

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
REI	STOP/TURN/TAI	L LIGHTS - 9 DIODES	
STL59RB	STL59RBP	Red, hard wired	10
STL59RCB	STL59RCBP	Clear lens, red, hard wired	10

FMVSS	STI
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC2A Stop, .01A Tail
WT/DIMS	.441 lbs. / 12.625" x 1" x .5"
WARRANTY	Lifetime LED Warranty










STL64 SERIES

Thinline Sealed LED Stop/Turn/Tail Lights





STL64RCB



- Sonically sealed, waterproof
- Low profile design—only 3/4" thick
- Surface mount on 19-5/8" centers
- Hard wired with separate ground wire

	BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	R	RED STOP/TURN	I/TAIL - 15 DIODES	
	STL64RB	STL64RBP	Red, hard wired	10
	STL64RCB	STL64RCBP	Clear lens, red diodes, hard wired	10
ACCESSORIES				
	A64CRB	A64CRBP	Chrome bezel	50
	A64BB	A64BBP	Black bezel	50

FMVSS	S2 T2 I6
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC2A Stop, .01A Tail
WT/DIMS	.441 lbs. / 20.5" x 1" x .75"
WARRANTY	Lifetime LED Warranty



STL87 SERIES

Thinline Sealed LED Stop/Turn/Tail Lights

- · Sonically sealed, waterproof
- Low profile design-only 5/8" thick
- Surface mount on 14-9/16" centers
- Hard wired with separate ground wire






STI 87RCB

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
RED	STOP/TURN/TAIL	LIGHTS - 11 DIODES	
STL87RCB	STL87RCBP	Clear lens, red diodes	10
STL87RCPG	STL87RCPGP	Clear lens, red diodes .180 male bullets	10

S2 T2 I6
Polycarbonate lens and housing
12.8VDC2A Stop, .01A Tail
.441 lbs. / 16.188" x 1.25" x .688"
Lifetime LED Warranty











STL153 SERIES

GloLight® LED Dual Face **Pedestal Mount Lights**

PATENTED TECHNOLOGY

- 25 LEDs per side
- Ring illuminates for tail light function; inner LEDs light and ring brightens for brake/turn
- Includes built-in 3-LED yellow side marker with reflex
- Hard wired, includes separate ground wire



STL153ARPBB

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
DI	JAL FACE RED	YELLOW - 25 DIODES	
STL153ARDBB	STL153ARDBBP	Driver side	10
STL153ARPBB	STL153ARPBBP	Passenger side	10




FMVSS S2 T2 I6, I6 P, A P2

MATERIALS Chrome plastic housing, acrylic lens **VOLT/AMP** 12.8V / .360A Stop, .030A Tail WT/DIMS 1.477 lbs. / 4.688" x 4.875" x 2.438"

WARRANTY Lifetime LED Warranty





STL52/53 SERIES


LED Pedestal Mount Lights

- Lead wires exit through mounting post; separate ground wire
- 21 LEDs per side
- STL53 available in driver and passenger side models with built-in yellow side marker with reflex

POLYPACK P/N	DESCRIPTION	QTY	
DUAL FACE	RED YELLOW - 42 DIODES		
STL52ARBP	Round	10	
STL53ARPBP	Square, passenger side	10	
STL53ARDBP	Square, driver side	10	
RETAIL			
Retail Ready	Round, clam	6	
	DUAL FACE STL52ARBP STL53ARPBP STL53ARDBP	DUAL FACE RED YELLOW - 42 DIODES STL52ARBP Round STL53ARPBP Square, passenger side STL53ARDBP Square, driver side RETAIL	

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	DUAL FACE	RED YELLOW - 42 DIODES	
STL52ARB	STL52ARBP	Round	10
STL53ARPB	STL53ARPBP	Square, passenger side	10
STL53ARDB	STL53ARDBP	Square, driver side	10
RETAIL			
STL52ARS	Retail Ready	Round, clam	6

FMVSS	STL52:	STIP
	STL53:	Tail S T I P, Side Marker A P2
MATERIALS	STL52:	Die cast housing, polycarbonate lens
	STL53:	Polycarbonate lens and housing
VOLT/AMP	STL52:	12.8VDC360 Stop/Turn, .030A Tail
	STL53:	12.8VDC750 Stop/Turn, .114A Tail
WT/DIMS	STL52:	1.477 lbs. / 4.25" x 4.25" x 1.938"
	STL53:	.882 lb. / 4.5" x 4.75" x 2.25"
WARRANTY	Lifetime LE	ED Warranty





















GloLight® 7" LED Transit Lights

PATENTED TECHNOLOGY


- Sonically sealed, waterproof
- · Surface mount light with mounting gasket
- Built-in reflector meets reflex requirement "A"
- Hard wired with separate ground wire




STL190RB	
TAIL	
LIGHT	

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
RI	ED STOP/TURN	I/TAIL LIGHT - 32 DIODES	
STL190RB	STL190RBP	Stop/turn/tail light	5
STL190RPG	STL190RPGP	Stop/turn/tail light, amp plug	5
YELLOW PARKING/TURN SIGNAL - 32 DIODES			
STL190AB	STL190ABP	Parking/turn signal	5

FMVSS	Red S2 I6	6 T2 P2 A; Yellow I6 P2 A
MATERIALS	Polycarbo	onate lens and housing
VOLT/AMP	Red:	12.8VDC340A Stop/Turn, .135A Tail
	Yellow:	12.8VDC410A Turn, .072A Parking
WT/DIMS	.970 lb. /	7" x 7" x 1.625"
WARRANTY	Lifetime L	.ED Warranty






STL90 SERIES

7" Round LED Transit Lights

- Sonically sealed, waterproof
- Surface mount light with mounting gasket
- · Built in reflector meets reflex requirement "A"
- · Hard wired with separate ground wire
- Available in 12V and 12-24V models

POLYPACK P/N	DESCRIPTION	QTY
ED STOP/TURN	N/TAIL LIGHT - 31 DIODES	
STL90RBP	Stop/turn/tail light, 12V	5
STL90R24BP	Stop/turn/tail light, 12-24V	5
YELLOW TUR	N SIGNAL - 31 DIODES	
STL90ABP	Parking/turn signal, 12V	5
STL90A24BP	Parking/turn signal, 12-24V	5
	STL90RBP STL90R24BP YELLOW TUR STL90ABP	STL90RBP Stop/turn/tail light, 12V STL90R24BP Stop/turn/tail light, 12-24V YELLOW TURN SIGNAL - 31 DIODES STL90ABP Parking/turn signal, 12V

FMVSS	Red S2 I6	6 T2 P2 A; Yellow I6 P2 A
MATERIALS	Polycarbo	nate lens and housing
VOLT/AMP	Red:	12.8VDC243A Stop/Turn, .046A Tail
	Yellow:	12.8VDC275A Turn, .042A Parking
WT/DIMS	.970 lb. /	7" x 7" x 1.438"
WARRANTY	Lifetime L	ED Warranty















GloLight



TAIL LIGHT

STOP/TURN/BACK-UP



STL161RB

STL161 SERIES

GloLight® LED Combination Tail Lights

PATENTED TECHNOLOGY

- Stud mount stop/turn/tail light with built-in back-up light and reflex
- 30-LED tail light; 6-LED back-up light
- · Driver side light also includes 3-LED license light
- Hard wired; wire exits through back of housing
- · Includes ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
GLO	LIGHT® COMI	BINATION TAIL LIGHTS - 36 DIODES	
STL161RB	STL161RBP	Passenger side, 30-LED tail, 6-LED back-up	5
STL161RLB	STL161RLBP	Driver side with 3-LED license light	5

FMVSS STL161RB: A I6 (2)R S2 (3)T


STL161RLB: A I6 (2)R S2 (3)T L


MATERIALS Acrylic lens, plastic housing

VOLT/AMP 12.8VDC - Tail .19A, Stop/Turn .30A, Back-up .21A

WT/DIMS .882 lb. / 5.813" x 6.75" x 2.688"

WARRANTY Lifetime LED Warranty





STL60/61 SERIES

LED Combination Tail Lights

- Stud mount stop/turn/tail lights with built-in back-up light and reflex
- Choose from Optronics® LED 52-diode and FLEET Count™ 15-diode tail lights
- Hard wired; wire exits through back of housing
- Includes ground wire

POLYPACK P/N	DESCRIPTION	QTY
RONICS® CON	IBINATION TAIL LIGHTS - 52 DIODES	
STL60RBP	Passenger side, 16-LED tail, 36-LED back-up	5
STL60RLBP	Driver side with 5-LED license light	5
COUNT™ CO	MBINATION TAIL LIGHTS - 15 DIODE	S
STL61RBP	Passenger side, 9-LED tail, 6-LED back-up	5
STL61RLBP	Driver side with 3-LED license light	5
	STL60RBP STL60RLBP COUNT™ CO	STL60RLBP Driver side with 5-LED license light COUNT™ COMBINATION TAIL LIGHTS - 15 DIODE STL61RBP Passenger side, 9-LED tail, 6-LED back-up







STL60RB







STL61RB

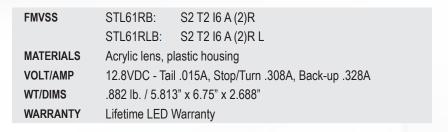

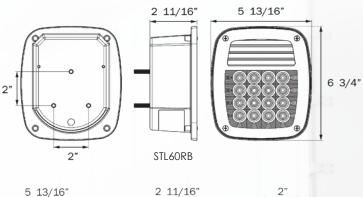















STL82RB

STL82/83 SERIES

LED Combination Tail Lights

- · Low profile style fits standard footprint
- Meets requirements for over and under 80" wide trailers
- SMD LED technology for reliable, waterproof performance
- Stud mount lights mount on 2" centers
- Hard wired, with separate ground wire
- 7-function: stop, turn, tail, rear clearance, rear reflex, side marker and side reflex
- · Driver side light also includes license illuminator




BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	COMBINA	TION TAIL LIGHTS	
STL82RB	STL82RBP	Passenger side, 11 diodes	10
STL83RB	STL83RBP	Driver side, 14 diodes	10



STL83RB

FMVSS	Stop/Tail S2 T2 I6 A, Side Marker A PC, License L
MATERIALS	Acrylic lens and plastic housing
VOLT/AMP	12.8VDC - Stop/Turn .163A, Marker .095A, Tail/License .163A
WT/DIMS	.45 lb. / 5.25" x 4.5" x 1.75"
WARRANTY	Lifetime LED Warranty

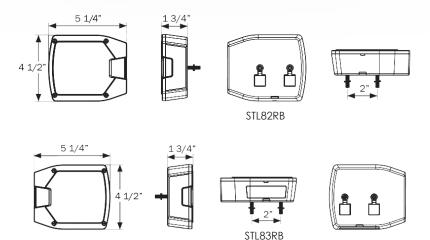

STL108/109 SERIES


GloLight® LED Combination Tail Lights




PATENTED TECHNOLOGY

- Traditional style fits many applications
- Stud mount lights mount on 2" centers
- Hard wired, with separate ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	COMBINATION 1	TAIL LIGHTS - 25 DIODES	
STL108RB	STL108RBP	Passenger side	10
STL109RB	STL109RBP	Driver side, 3-LED license light	10
RETAIL			
TLL190RK		STL109RB, mounting Retail Ready Repackage, clam	2









TAIL LIGHT



STL108/109RB



TLL190RK





COTTONICS Laboratoria



STL39RB



STL38RB



TLL9RK



TLL90RK

STL38/39 SERIES

Waterproof LED Combination Tail Lights


- Traditional style fits many applications
- SMD LED technology for reliable, waterproof performance
- Stud mount lights mount on 2" centers
- · Hard wired, with separate ground wire
- · Available in bulk, polypack and retail packaging

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	COMBINATION	TAIL LIGHTS - 7 DIODES	
STL38RB	STL38RBP	Passenger side	10
STL39RB	STL39RBP	Driver side, 3-LED license light	10
		RETAIL	
STL6RS	Passenger side,	clam	6
STL7RS	Driver side with 3	-LED license light, clam	6
TLL9RK	Kit: STL38RB, ST bracket, mounting	TL39RB, 25-ft harness, license plate g hardware, clam	2
TLL90RK	Set: STL38RB, S	TL39RB, mounting hardware, clam	2

FMVSS	Stop/Tail A I S T, Side Marker A PC, License L
MATERIALS	Acrylic lens and plastic housing

VOLT/AMP 12.8VDC - Stop/Turn .19A, Marker .065A

WT/DIMS .970 lb. / 5" x 4.5" x 2.688"
WARRANTY Lifetime LED Warranty





STL8/9 SERIES

LED Combination Tail Lights



- Stud mount lights mount on 2" centers
- Hard wired, with separate ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	COMBINATION T	TAIL LIGHTS - 11 DIODES	
STL8RB	STL8RBP	Passenger side	10
STL8R3B	STL8R3BP	Passenger side, female PL-3 plug	10
STL8RGB	STL8RGBP	Passenger side, self-grounding	10
STL9RB	STL9RBP	Driver side, 3-LED license light	10
STL9R3B	STL9R3BP	Driver side, 3-LED license light, female PL-3 plug	10
STL9RGB	STL9RGBP	Driver side, 3-LED license light, self-grounding	10

STL8RB	STL8RBP	Passenger side	10
STL8R3B	STL8R3BP	Passenger side, female PL-3 plug	10
STL8RGB	STL8RGBP	Passenger side, self-grounding	10
STL9RB	STL9RBP	Driver side, 3-LED license light	10
STL9R3B	STL9R3BP	Driver side, 3-LED license light, female PL-3 plug	10
STL9RGB	STL9RGBP	Driver side, 3-LED license light, self-grounding	10


FMVSS	Stop/Tail A I S T, Side Marker A P2, License L
MATERIALS	Acrylic lens and plastic housing
VOLT/AMP	12.8VDC - Stop/Turn .259A, Marker .062A
WT/DIMS	.970 lb. / 5.25" x 4.75" x 2.688"
WARRANTY	Lifetime LED Warranty







STL8/9RB








COTTONICS [L = D]



CTI 2DD



STL2RB





STL2/3 SERIES

LED Combination Tail Lights for Over 80" Applications

- Designed for over 80" wide applications
- Stud mount lights mount on 2" centers
- · Hard wired, with separate ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
OVE	R 80 COMBIN	ATION TAIL LIGHTS - 18 DIODES	
STL2RB	STL2RBP	Passenger side	10
STL2RGB	STL2RGBP	Passender side, self-grounding	10
STL3RB	STL3RBP	Driver side, license light	10
STL3RGB	STL3RGBP	Driver side, license light, self-grounding	10

FMVSS	Stop/Tail S2 T2 I6 A. Side Mark	er PC A. License L

MATERIALS Acrylic lens and plastic housing

VOLT/AMP 12.8VDC - Stop/Turn .268A, Marker .059A

WT/DIMS .970 lb. / 6.25" x 4.75" x 2.688"
WARRANTY Lifetime LED Warranty



STL008/009 SERIESONE™ LED Combination Tail Lights

- · Sealed, waterproof design
- · Traditional style fits many applications
- Stud mount lights mount on 2" centers
- · Hard wired with separate ground wire


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	COMBINATION	TAIL LIGHTS - 1 DIODE	
STL008RB	STL008RBP	Passenger side	10
STL009RB	STL009RBP	Driver side	10
STL008RPG	STL008RPGP	Passenger side, .180 bullets	10
STL009RPG	STL009RPGP Driver side, .180 bullets		10
		RETAIL	
STL008RS	Passenger side	Retail Ready	6
STL009RS	Driver side with 3	B-LED license light	6
TLL008RK	Set: STL008RB,	STL009RB, mounting hardware, clam	2





STL008RB






MATERIALS Acrylic lens and plastic housing

VOLT/AMP 12.8VDC - Stop/Turn .25A, Marker .062A

WT/DIMS .970 lb. / 5.063" x 4.563" x 2.875"

WARRANTY Lifetime LED Warranty





TLL008RK





MIRO-FLEX




STL29RB



STL28RB



TLL29RK



STL28/29 SERIES

Miro-Flex™ LED Combination Tail Lights

- Chrome-plated, multi-faceted reflector paired with smooth lens offers unique automotive appearance
- Universal design fits many applications
- SMD LED technology for reliable, waterproof performance
- Stud mount lights mount on 2" centers
- · Hard wired with separate ground wire
- STL28 is 6-function: stop, turn, tail, rear reflex, side marker and side reflex
- STL29 is 7-function: above plus license illuminator

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
COMBINATION TAIL LIGHTS - 15 DIODES			
STL28RB	STL28RBP	Passenger side	10
STL29RB	STL29RBP	STL29RBP Driver side, with 5-LED license light	
Retail Ready RETAIL			
TLL28RK	Set: STL28RB, S	TL29RB, mounting hardware; clam	2
TLL29RK	Kit: STL28RB, STL29RB, 25-ft harness, license plate bracket, mounting hardware; clam		2

STL28: Stop/Tail A I S T, Side Marker A P2		
STL29:	Stop/Tail A I S T, Side Marker A P2, License L	
Acrylic lens and plastic housing		
STL28: 12.8VDC174A Stop/Turn, .054A Marker		
STL29:	12.8VDC174A Stop/Turn, .054A Marker	
.750 lb. / 5.25" x 5" x 2.625"		
Lifetime LED Warranty		
	STL29: Acrylic le STL28: STL29: .750 lb. /	

STL116/117 SERIES GloLight® LED Low Profile **Combination Tail Lights**

PATENTED TECHNOLOGY

- PATENTED TECHNOLOGY
- Designed for marine trailer application
- Sealed, waterproof construction
- Universal mount
- Hard wired, with separate ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
COMBINATION TAIL LIGHTS - 28 DIODES				
STL116RB	STL116RBP	Passenger side	10	
STL117RB	STL117RBP	Driver side, with 6-LED license light	10	
		RETAIL		
TLL170RK	Set: STL116RB, Try Me package	STL117RB, mounting hardware, e	2	

FMVSS STL116: A S T, P2 A; STL117: A S T, P2 A,	FMVSS	STL116: A I S T. P2 A	: STL117: A I S T. P2 A. L
--	-------	-----------------------	----------------------------

MATERIALS Acrylic lens and plastic housing

VOLT/AMP 12.8VDC - Stop/Turn .252A, Marker .135A

WT/DIMS .816 lb. / 8" x 2.9" x 2.6" WARRANTY Lifetime LED Warranty





TAIL LIGHT

STL116RB




STOP/TURN

STL117RB



TLL170RK Try Me Kit







IGHTGUIDE



TAIL LIGHT

STL616NTRB



STOP/TURN


STL617NTRB

STL616/617 SERIESLightGuide™ LED Combination Stop/Turn/Tail Light

PATENTED TECHNOLOGY

- Central X-shaped feature illuminates for tail light function
- Surrounding diodes light for stop and turn functions
- Designed for marine trailer application
- Sealed, waterproof construction
- Universal mount
- Hard wired, with separate ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
COMBINATION TAIL LIGHTS - 16 DIODES				
STL616NTRB	STL616NTRBP	Passenger side	10	
STL617NTRB	STL617NTRBP	Driver side, with 3-LED license light	10	



FMVSS	S T I A P2, P2 A, L
MATERIALS	Acrylic lens and plastic housing
VOLT/AMP	12.8VDC - Stop .259/Tail .062
WT/DIMS	.816 lb. / 8.063" x 2.875" x 2.813"
WARRANTY	Lifetime LED Warranty




STL16/17 SERIES

LED Combination Tail Lights

- Designed for marine trailer application
- Sealed, waterproof construction
- Universal mount
- · Hard wired, with separate ground wire
- STL16/17NTRB feature light tube technology and SMD LED

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
COMBINATION TAIL LIGHTS - 18 DIODES			
STL16RB	STL16RBP	Passenger side	10
STL17RB	STL17RBP	Driver side, with 4-LED license light	10
STL16NTRB	STL16NTRB	Passenger side, SMD LED	10
STL17NTRB	STL17NTRB	Driver side, SMD LED with 4-LED license light	10
ACCESSORIES			
AL16RB	AL16RBP	Tail light lens for STL16/17RB	50
AL17RB	AL17RBP	Side marker lens STL16/17RB	50
RETAIL			
STL16RS	Passenger side,	stainless hardware	6
STL17RS	Driver side with 4	-LED license light, stainless hardware	6
TLL160RK	Set: STL16RB, S	TL17RB, mounting hardware; clam	2
TLL16RK		TL17RB, 25-ft harness, license plate steel mounting hardware; clam	2

FMVSS	STL16: Stop/Tail A I S T P2 PC, Side Marker A P2		
	STL17:	Stop/Tail A I S T P2 PC, Side Marker A P2, License L	
MATERIALS	Acrylic lens and plastic housing		
VOLT/AMP	STL16:	12.8VDC259A Stop/Turn, .062A Marker	
	STL17:	12.8VDC268A Stop/Turn, .059A Marker	
WT/DIMS	.816 lb. / 8.063" x 2.875" x 2.813"		
WARRANTY	Lifetime LED Warranty		









STL17RB





STL16NTRB





TLL16RK








FLEET COUNT



STL15RB



STL14RB





STL14/15 SERIESFLEET Count™ LED Low Profile **Combination Tail Lights**

- Designed for marine trailer application
- Sealed, waterproof construction
- Universal mount
- Hard wired, with separate ground wire

POLYPACK P/N	DESCRIPTION	QTY		
COMBINATION TAIL LIGHTS - 12 DIODES				
STL14RBP	Passenger side	10		
STL14R1BP	Passenger side, 16-in. leads	10		
STL15RBP	Driver side, with 6-LED license light	10		
STL15R1BP	Driver side, with 6-LED license light, 16-in. leads	10		
	COMBINATION STL14RBP STL14R1BP STL15RBP	COMBINATION TAIL LIGHTS - 12 DIODES STL14RBP Passenger side STL14R1BP Passenger side, 16-in. leads STL15RBP Driver side, with 6-LED license light STL15R1BP Driver side, with 6-LED license light,		

FMVSS	STL14: A S T, P2 A; STL15: A S T, P2 A, L			
MATERIALS	Acrylic lens and plastic housing			
VOLT/AMP	12.8VDC - Stop/Turn .252A. Marker .135A			
WT/DIMS	.816 lb. / 8" x 2.875" x 2.813"			
WARRANTY	Lifetime LED Warranty			

STL0016/0017 SERIES ONE™ LED Combination Tail Lights

- Designed for marine trailer application
- Sealed, waterproof construction
- Universal mount
- Hard wired, with separate ground wire





SΤ	L00	16RB




STL0017RB



TLL0016RK

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
COMBINATION TAIL LIGHTS				
STL0016RB	STL0016RBP	Passenger side	10	
STL0017RB	STL0017RBP	Driver side, with license light	10	
STL0016RP2G	STL0016RP2GP	Passenger side, 2-pin male/female plug, ring terminal on ground	10	
STL0017RP2G	STL0017RP2GP	Driver side, with license light, 2-pin male/ female plug, ring terminal on ground	10	
		RETAIL		
STL0016RS	Passenger side, clam		6	
STL0017RS	Driver side with 4-LED license light, clam		6	
TLL0016RK	Set: STL0016RB, STL0017RB, mounting hardware, clam		2	
FMVSS STL0016: Stop/Tail A I S T P2, Side Marker A P2 STL0017: Stop/Tail A I S T P2, Side Marker A P2, License L				
MATERIALS	Acrylic lens and plastic housing			
VOLT/AMP	STL0016:12.8VD0	C31A Stop/Turn, .12A Marker		
		C32A Stop/Turn, .26A Marker		
WT/DIMS	.816 lb. / 8.0" x 2.9" x 2.6"			
WARRANTY	Lifetime LED Warr	anty		












STL26RB







STL27RB



TLL26RK


STL26/27 SERIES Miro-Flex[™] LED

Combination Tail Lights

- Designed for marine trailer application
- Sealed, waterproof construction
- Universal mount
- Hard wired, with separate ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	COMBINATION T	AIL LIGHTS - 14 DIODES	
STL26RB	STL26RBP	Passenger side	10
STL27RB	STL27RBP	Driver side with 4-LED license light	10
		RETAIL	
TLL26RK	Set: STL26RB, S	TL27RB, mounting hardware; clam	2
Retail	Ready		

FMVSS	STL26: S2 T2 I6 A PC
	STL27: S2 T2 I6 A PC L
MATERIALS	Acrylic lens and plastic housing
VOLT/AMP	STL26: 12.8VDC167A Stop/Turn, .054A Marker
	STL27: 12.8VDC167A Stop/Turn, .107A Marker/License
WT/DIMS	.882 lb. / 8.063" x 2.938" x 2.688"
WARRANTY	Lifetime LED Warranty




STL36/37 SERIES LED Combination Tail Lights

- Designed for marine trailer application
- Sealed, waterproof construction
- Universal mount
- Hard wired, with separate ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	COMBINATION	TAIL LIGHTS - 17 DIODES	
STL36RB	STL36RBP	Passenger side	20
STL36RPG	STL36RPGP	Passenger side, dual plug and ground eyelet	20
STL37RB	STL37RBP	Driver side, 6-LED license light	20
STL37RPG	STL37RPGP	Driver side, 6-LED license light, dual plug and ground eyelet	20
		RETAIL	
STL36RS	Passenger side	Retail Ready	6
STL37RS	Driver side with 4-	-LED license light	6
TLL36RK	marker lights with	L37RB, (2) MCL91AK sealed yellow chrome bases, 25-ft harness, license nless steel mounting hardware; clam	2

FMVSS	STL36:	Stop/Tail A S T I P2, Side Marker A PC	
	STL37:	Stop/Tail A S T I P2, Side Marker A PC, License L	
MATERIALS	Acrylic le	ens and plastic housing	
VOLT/AMP	12.8VDC181A Stop/Turn, .047A Marker		
WT/DIMS	.992 lb. / 7.875" x 3.25" x 2.875"		
WARRANTY	Lifetime	LED Warranty	











STL36/37RB



TLL36RK













STL56/57RB

STL56/57 SERIES

LED Combination Tail Lights


- Designed for marine trailer application
- Sealed, waterproof construction
- Universal mount
- · Hard wired, with separate ground wire
- Stainless steel hardware


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	COMBINATION	I TAIL LIGHTS - 18 DIODES	
STL56RB	STL56RBP	Passenger side	10
STL57RB	STL57RBP	Driver side, 5-LED license light	10
		RETAIL	
TLL56RK		L57RB, 25-ft harness, license plate steel mounting hardware; clam	2
Retail Re	ady		



TLL56RK



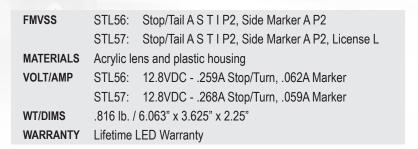



TLL21RK

LED Wireless Towing Light Kit

- Sonically sealed, waterpoof stop/turn/tail lights
- Magnetic base mounts securely on metal surfaces
- Wire harness connects to towing vehicle



BULK P/N POLYPACK P/N **DESCRIPTION** QTY **RETAIL**

TLL21RK Towing light kit with wiring harness, clam


FMVSS STI

MATERIALS Polycarbonate

12.8VDC - .360A Stop/Turn, .030A Tail VOLT/AMP WT/DIMS 2 lbs. / 3.938" x 5.875" x 2.186" WARRANTY Lifetime LED Warranty
















TLL31RK

LED Wireless Towing Light Kit

- Battery powered stop/turn/tail lights
- Sonically sealed, waterpoof
- Magnetic base mounts securely on metal surfaces
- Wireless design simplifies installation, includes wireless transmitter



BULK P/N	POLYPACK P/N	DESCRIPTION	Retail Ready	QTY
		RETAIL		
TLL31RK	LED wireless ma	gnet mount towing	light kit, clam	2
FMVSS	STI			
MATERIALS	Polycarbonate			
VOLT/AMP	12.8VDC360	A Stop/Turn, .030A	Tail	
WT/DIMS	2 lbs. / 3.938" x	6" x 2.188"		
WARRANTY	Lifetime LED W	arranty		



BUL603 SERIES

LightGuide™ 4" Round Sealed Back-Up Lights


PATENTED TECHNOLOGY

- Sonically sealed, waterproof
- Grommet mount
- Accepts industry standard PL-3 connector
- Central X-shaped feature illuminates for auxiliary tail light function (BUL603CRB only)




LIGHT GUIDE

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	CLEAR BACK	-UP LIGHTS - 12 DIODES		
BUL603CB	BUL603CBP	Clear lens, grommet mount, 2-pin connection	10	
BUL603CRB	BUL603CRBP	Clear lens, grommet mount, red auxiliary tail function, PL-3 connection	10	
	ACCESSORIES			
A45GB	A45GBP	Grommet	50	
A45CB	A45CBP	Pigtail, 2-wire	100	
A49PB	A49PBP	Right angle pigtail, 2-wire	100	
A45PB	A45PBP	Pigtail, 3-wire	100	
A47PB	A47PBP	Right angle pigtail, 3-wire	100	



FMVSS	(2) R
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 0.216A
WT/DIMS	.28 lbs. / 4.3" x 4.3" x 1.08"
WARRANTY	Lifetime LED Warranty








GloLight[®]





BUL101CB



HOLE CUT-OUT: 4.5"

BUL101 SERIES

GloLight® 4" Round Sealed DOT LED Back-Up Lights

- Sonically sealed, waterproof
- Certified for back-up light function when installed as pair in two-lamp system [SAE (2)R]

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	CLEAR BACK-	UP LIGHTS - 21 DIODES	
BUL101CB	BUL101CBP	Standard 2-pin connection	10
BUL101CKB	BUL101CKBP	Kit with A45GB and A49PB	10
	AC	CESSORIES	
A45GB	A45GBP	Grommet	50
A45CB	A45CBP	Pigtail, 2-wire	100
A49PB	A49PBP	Right angle pigtail, 2-wire	100
BK45BB	BK45BBP	Black steel bracket	10
A45BB	A45BBP	Black plastic flange	100
A45SB	A45SBP	Stainless steel mounting flange	20
A45CGB	A45CGBP	Chrome grommet cover	20

FMVSS	(2) R
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 0.425A
WT/DIMS	.309 lbs. / 4.313" x 4.313" x 1.625"
WARRANTY	Lifetime LED Warranty

BUL11 SERIES

RIII K P/N

4" Round Sealed Clear **DOT LED Back-Up Lights**

POLYPACK P/N

- Sonically sealed, waterproof
- Certified for back-up light function when installed as pair in two-lamp system [SAE (2)R]
- Available in grommet and flange mount models
- Grommet mount version available with standard 2-pin, or optional weathertight connection
- Grommet mount version available in 12V and 24V



BUL11CBX

OTV

DOLKTAN	I OLIT ACICT/III	DEGORII TION	QII
CLEAR BACK-UP LIGHTS - 10 DIODES			
BUL11CB	BUL11CBP	12V, two-pin connection	10
BUL11CKB	BUL11CKBP	12V kit: BUL11CB, A45GB & A49PB	10
BUL11CMB	BUL11CMBP	12V, weathertight connection	10
BUL11CM24B	BUL11CM24BP	24V, weathertight connection	10
CLEAD BACK-LID LIGHT WITH DEEL BY - 10 DIODES			

DESCRIPTION

BUL11CBX	BUL11CBXP	12V, two-pin connection	10
	AC	CESSORIES	
A45GB	A45GBP	Grommet	50
A45CB	A45CBP	Pigtail, 2-wire	100
A49PB	A49PBP	Right angle pigtail, 2-wire	100
A45PMB	A45PMBP	Weathertight pigtail	100
AL45PWTB	AL45PWTBP	Weathertight to PL-3 adaptor	50

FMVSS	(2) R
-------	-------

MATERIALS Polycarbonate lens and housing


VOLT/AMP 12.8VDC - 0.26A

WT/DIMS BUL11CB/CKB: .309 lbs. / 4.313" x 4.313" x 1.625"

> BUL11CMB/CM24B: .309 lbs. / 4.313" x 4.313" x 1.625"

BUL11CBX: .353 lbs. / 5.75" x 5.75" x 1.625"

WARRANTY Lifetime LED Warranty

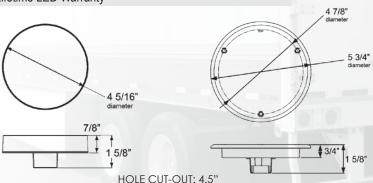





FLEET COUNT



BUL06CB



BUL06CFB

5 1/2" 4 1/4" 1 7/8" BUL06CFB

HOLE CUT-OUT: 4.579"


BULO6 SERIES

FLEET Count™ 4" Round Sealed DOT LED Back-Up Lights

- Sonically sealed, waterproof
- Certified for back-up light function when installed as pair in two-lamp system [SAE (2)R]

	BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		CLEAR BACK-	UP LIGHTS - 6 DIODES	
	BUL06CB	BUL06CBP	Grommet mount, 2-pin connection	10
	BUL06C1224B	BUL06C1224BP	Grommet mount, 2-pin connection, 12/24V	10
	BUL06CKB	BUL06CKBP	Kit with A45GB and A49PB, 2-pin	10
	BUL06CMB	BUL06CMBP	Grommet mount, weathertight connection	10
	BUL06CK1MB	BUL06CK1MBP	Kit: BUL06CMB with A45GB grommet, weathertight connection	10
	BUL06CFB	BUL06CFBP	Flange mount, 2-pin connection	10
	BUL06CFMB	BUL06CFMBP	Flange mount, weathertight connection	10
ACCESSORIE			CESSORIES	
	A45GB	A45GBP	Grommet	50
	A45CB	A45CBP	Pigtail, 2-wire	100
	A49PB	A49PBP	Right angle pigtail, 2-wire	100
	BK45BB	BK45BBP	Black steel bracket	10
	A45BB	A45BBP	Black plastic flange	100
	A45SB	A45SBP	Stainless steel mounting flange	20
	A45CGB	A45CGBP	Chrome grommet cover	20
	A45PMB	A45PMBP	Weathertight pigtail	100


FMVSS	(2) R
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 0.180A
WT/DIMS	Grommet mount: .309 lbs. / 4.25" x 4.25" x 1.625"
	Flange mount: .350 lbs. / 5.5" x 5.5" x 1.875"
WARRANTY	Lifetime LED Warranty



HOLE CUT-OUT: 4.528"



BUL003 SERIES ONE™ LED 4" Round Sealed **DOT Back-Up Lights**



Certified for back-up light function when installed as pair in two-lamp system [SAE (2)R]


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
CLEAR BACK-UP LIGHTS - 1 DIODE				
BUL003CB	BUL003CBP	Grommet mount, 2-pin connection	10	
BUL003CKB	BUL003CKBP	Kit with A45GB grommet and A45CB pigtail	10	
BUL003C1224B	BUL003C1224BP	Grommet mount, 2-pin connection 12-24V	50	
ACCESSORIES				
A45GB	A45GBP	Grommet	50	
A45CB	A45CBP	Pigtail, 2-wire	100	
A49PB	A49PBP	Right angle pigtail, 2-wire	100	

FMVSS	(2) R
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC26A
WT/DIMS	.22 lbs. / 4.313" x 4.313" x 1.688"
WARRANTY	Lifetime LED Warranty





BUL003CB
















BUL23/53 SERIES 4" Round Sealed Clear **DOT LED Back-Up Lights**



- Sonically sealed, waterproof
- Certified for back-up light function when installed as pair in two-lamp system [SAE (2)R]
- High diode count; choose from 27- or 36-LED models
- 27-LED version available in 12V and 12-24V

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	CLEAR BACK	(-UP LIGHTS - 27 DIODES	
BUL23CB	BUL23CBP	12V, 2-pin connection	10
BUL23C24B	BUL23C24BP	12-24V, 2-pin connection	10
	CLEAR BAC	K-UP LIGHT - 36 DIODES	
BUL53CB	BUL53CBP	12V, two-pin connection	10
ACCESSORIES			
A45GB	A45GBP	Grommet	50
A45CB	A45CBP	Pigtail, 2-wire	100
A49PB	A49PBP	Right angle pigtail, 2-wire	100

FMVSS	(2) R	
MATERIALS	Polycarbonate lens and housing	
VOLT/AMP	BUL23: 12.8VDC - 0.145A	
	BUL53: 12.8VDC - 0.275A	
WT/DIMS	.309 lbs. / 4.313" x 4.313" x 2"	
WARRANTY	Lifetime LED Warranty	

BUL602 SERIES

LightGuide™ 6" Oval Sealed DOT Back-Up Lights

PATENTED TECHNOLOGY (pat. D820,486)

- Sonically sealed, waterproof
- Grommet mount
- Certified for back-up light function when installed as pair in two-lamp system [SAE (2)R]
- BUL602CRB includes auxiliary tail light function

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	CLEAR BACK-	UP LIGHTS - 12 DIODES	
BUL602CB	BUL602CBP	Grommet mount, 2-pin connection	10
BUL602CRB	BUL602CRBP	Grommet mount, supplemental tail light function, PL-3 connection	10
ACCESSORIES			
A70GB	A70GBP	Grommet	50
A45PB	A45PBP	Pigtail, 3-wire	100
A47PB	A47PBP	Right angle pigtail, 3-wire	100
A45CB	A45CBP	Pigtail, 2-wire	100
A49PB	A49PBP	Right angle pigtail, 2-wire	100

FMVSS	(2) R
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 0.381A
WT/DIMS	.375 lbs. / 6.5" x 2.8" x 1.80"
WARRANTY	Lifetime LED Warranty








BUL602CB





BUL602CRB



HOLE CUT-OUT: 6.85" x 2.52" (1.26" R)














6.85" x 2.52" (1.26" R)

BUL111 SERIES

GloLight® 6" Oval Sealed DOT LED Back-Up Lights

- Sonically sealed, waterproof
- Certified for back-up light function when installed as pair in two-lamp system [SAE (2)R]

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	CLEAR BACK-	UP LIGHTS - 22 DIODES	
BUL111CB	BUL111CBP	Standard two-pin connection	10
	AC	CESSORIES	
A70GB	A70GBP	Grommet	50
A45CB	A45CBP	Pigtail, 2-wire	100
A49PB	A49PBP	Right angle pigtail, 2-wire	100
FMVSS	(2) R		
MATERIALS			
VOLT/AMP	12.8VDC - 0.386A		
WT/DIMS	.265 lbs. / 6.5	" x 2.375" x 1.75"	
WARRANTY	Lifetime LED Warranty		

BUL10/22/52 SERIES

6" Oval Sealed Clear DOT LED Back-Up Lights


- Sonically sealed, waterproof
- Certified for back-up light function when installed as pair in two-lamp system [SAE (2)R]
- Low to high diode count; choose from 10-, 27- or 36-LED models
- Accept standard two-pin plugs

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	CLEAR BACK-	JP LIGHT - 10 DIODES		
BUL10CB	BUL10CBP	Standard two-pin connection	10	
	CLEAR BACK-	JP LIGHT - 27 DIODES		
BUL22CB	BUL22CBP	Standard two-pin connection	10	
	CLEAR BACK-	JP LIGHT - 36 DIODES		
BUL52CB	BUL52CBP	Standard two-pin connection	10	
ACCESSORIES				
A70GB	A70GBP	Grommet	50	
A45CB	A45CBP	Pigtail, 2-wire	100	
A49PB	A49PBP	Right angle pigtail, 2-wire	100	

FMVSS	(2) R	
MATERIALS	Polycarbonate	e lens and housing
VOLT/AMP	BUL10:	12.8VDC - 0.260A
	BUL22:	12.8VDC - 0.125A
	BUL52:	12.8VDC - 0.275A
WT/DIMS	BUL10:	.265 lbs. / 6.438" x 2.25" x 1.75"
	BUL22/52:	.397 lbs. / 6.5" x 2.313" x 1.813"
WARRANTY	Lifetime LED	Warranty







HOLE CUT-OUT: 6.85" x 2.5" (1.25" R)










FLEET COUNT





BUL12CB




BUL12CFB









BUL12 SERIES

FLEET Count™ 6" Oval Sealed DOT LED Back-Up Lights

- Sonically sealed, waterproof
- Available with standard or weathertight connection
- Flange mount models available for recess or surface mount installation
- Certified for back-up light function when installed as pair in two-lamp system [SAE (2)R]

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
С	LEAR BACK-U	P LIGHTS - 6 DIODES	
BUL12CB	BUL12CBP	Recess mount, 2-pin	10
BUL12C1224B	BUL12C1224BP	Recess mount, 2-pin, 12/24V	10
BUL12CKB	BUL12CKBP	Kit with A70GB and A45CB, 2-pin	10
BUL12CFB	BUL12CFBP	Recess flange mount, 2-pin	10
BUL12CB1FPG	BUL12CB1FPGP	Kit: Hard wired recess mount light with black mounting flange, female PL-3 plug	10
BUL12CSB	BUL12CSBP	Surface flange mount, hard wired	10
	ACCE	ESSORIES	
A70GB	A70GBP	Grommet	50
A45CB	A45CBP	Pigtail, 2-wire	100
A49PB	A49PBP	Right angle pigtail, 2-wire	100
A45PMB	A45PMBP	Pigtail, weathertight	50
AL45PWTB	AL45PWTBP	Weathertight to PL-3 adaptor	50
A111TRSSB	A111TRSSBP	Stainless steel trim ring	50

FMVSS	(2) R
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 0.260A
WT/DIMS	.265 lbs. / 6.5" x 2.25" x 1.75"
WARRANTY	Lifetime LED Warranty




BUL002 SERIES

ONE™ LED 6" Oval Sealed DOT Back-Up Lights

- Sonically sealed, waterproof
- Certified for back-up light function when installed as pair in two-lamp system [SAE (2)R]

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	CLEAR BACK	-UP LIGHTS - 1 DIODE	
BUL002CB	BUL002CBP	Standard two-pin connection	10
BUL002CM3B	BUL002CM3BP	Weathertight connection, three-pin	10
	AC	CESSORIES	
A70GB	A70GBP	Grommet	50
A45CB	A45CBP	Pigtail, 2-wire	100
A49PB	A49PBP	Right angle pigtail, 2-wire	100
A45PMB	A45PMBP	Pigtail, weathertight	50
AL45PWTB	AL45PWTBP	Weathertight to PL-3 adaptor	50

FMVSS	(2) R
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 0.30A
WT/DIMS	.265 lbs. / 6.5" x 2.375" x 1.75"
WARRANTY	Lifetime LED Warranty



HOLE CUT-OUT: 6.85" x 2.52" (1.26" R)























HOLE CUT-OUT: 5.462" x 3.562" (1" R)





BUL35/90 SERIES Sealed Clear DOT LED

Sealed Clear DOT LED Back-Up Lights

- Sonically sealed, waterproof
- Certified for back-up light function when installed as pair in two-lamp system [SAE (2)R]
- BUL35 and BUL24 are 5.5" x 3.5" recess mount models that accept standard two-pin plugs
- BUL90 is 7" surface mount model, hard wired, with separate ground wire; designed for transit vehicles

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
CLEA	R 5.5" x 3.5"	BACK-UP LIGHTS - 16 DIODES	
BUL35CB	BUL35CBP	Standard two-pin connection, 12V	10
BUL24CB	BUL24CBP	Standard two-pin connection, 12-24V	10
С	LEAR 7" BAC	K-UP LIGHTS - 42 DIODES	
BUL90CB	BUL90CBP	12V, hard wired	5
BUL90C24B	BUL90C24BP	24V, hard wired	5
	A	CCESSORIES	
A33GB	A33GBP	Grommet for BUL35CB	50
A45CB	A45CBP	Pigtail, 2-wire	100
A49PB	A49PBP	Right angle pigtail, 2-wire	100
FMVSS	(2) R		
MATERIALS	Polycarbona	te lens and housing	
VOLT/AMP	BUL35:	12.8VDC - 0.295A	
	BUL24:	24.VDC - 0.198A	
	BUL90:	12.8VDC - 0.301A	
	BUL90:	24.0VDC - 0.089A	
WT/DIMS	BUL35/24:	.397 lbs. / 5.313" x 3.438" x 2.313"	
	BUL90:	.970 lbs. / 7" x 7" x 1.438"	
WARRANTY	Lifetime LED) Warranty	

SLL43 SERIES

4" Round Sealed LED Warning Lamps

- · Sonically sealed, waterproof
- Flashing lights with double-flash function, meeting SAE J595 and J845 standards for Class 2 and Class 3 directional warning lamps
- Use two Function 1 or Function 2 lights for synchronous flashing or pair a Function 1 with a Function 2 light for alternating flash pattern
- Accepts standard PL-3 plugs
- Operating voltage 9-30VDC, suitable for 12V or 24V systems

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
Υ	ELLOW WARN	ING LIGHTS - 22 DIODES	
SLL43AB1	SLL43AB1P	12V-24V Function 1	10
SLL43AB2	SLL43AB2P	12V-24V Function 2	10
SLL43AKB1	SLL43AKB1P	12V-24V Function 1, kit with A45GB & A45PB	10
SLL43AKB2	SLL43AKB2P	12V-24V Function 2, kit with A45GB & A45PB	10
	AC	CESSORIES	
A45GB	A45GBP	Grommet, 4" round	50
A45PB	A45PBP	Pigtail, 3-wire	100
A47PB	A47PBP	Right angle pigtail, 3-wire	100

FMVSS	W-2
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 0.56A
WT/DIMS	.60 lbs. / 4.25" x 4.25" x 1.75"
WARRANTY	Lifetime LED Warranty







SLL43AB1 SLL43AB2













SLL72AB1 SLL72AB2


SLL72 SERIES

6" Oval Sealed LED Warning Lamps

- Sonically sealed, waterproof
- Flashing lights with double-flash function, meeting SAE J595 and J845 standards for Class 2 and Class 3 directional warning lamps
- Use two Function 1 or Function 2 lights for synchronous flashing or pair a Function 1 with a Function 2 light for alternating flash pattern
- Accepts standard PL-3 plugs
- Operating voltage 9-30VDC, suitable for 12V or 24V systems

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
Υ	ELLOW WARN	IING LAMPS - 22 DIODES	
SLL72AB1	SLL72AB1P	12V-24V Function 1	10
SLL72AB2	SLL72AB2P	12V-24V Function 2	10
SLL72AKB1	SLL72AKB1P	12V-24V Function 1, kit with A70GB & A45PB	10
SLL72AKB2	SLL72AKB2P	12V-24V Function 2, kit with A70GB & A45PB	10
ACCESSORIES			
A70GB	A70GBP	Grommet, 6" oval	50
A45PB	A45PBP	Pigtail, 3-wire	100
A47PB	A47PBP	Right angle pigtail, 3-wire	100
FMVSS	W-2		

FMVSS	W-2
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 0.54A
WT/DIMS	.62 lbs. / 6.5" x 2.375" x 1.75"
WARRANTY	Lifetime LED Warranty



HOLE CUT-OUT: 6.85" x 2.5" (1.25" R)

SLL93 SERIES

7" Round LED Warning Lights for Surface Mount

- 8-LED school bus warning lights
- · Acrylic lens, die cast aluminum base plate
- Sealed, waterproof design


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	RED WARNIN	IG LIGHTS - 8 DIODES	
SLL93RB	SLL93RBP	Warning light, 12V	5
	YELLOW WARN	IING LIGHTS - 8 DIODES	
SLL93AB	SLL93ABP	Warning light, 12V	5
	AC	CESSORIES	
A94VB	A94VBP	Black Steel Visor	25

FMVSS W2 SAE J887

MATERIALS Acrylic len, die cast aluminum base

VOLT/AMP 12.8VDC - 2.0A

WT/DIMS 1.3875lb. / 7.25" x 7.25" x 1.9" **WARRANTY** Lifetime LED Warranty











SLL93AB with A94VB







RBL10CA




RBL10CC

RBL10C SERIES LED Dual-Function Strobe/Beacon

- Sonically sealed, waterproof
- Five flash patterns
- Surface mount design
- Operating voltage 9-36VDC
- SAE J845/EMC R10 approved

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELLOW BEAC	CON LIGHT - 12 DIODES	
RBL10CA	-	Clear lens, yellow diodes	1
	WHITE STRO	BE LIGHT - 12 DIODES	
RBL10CC	-	Clear lens, white diodes	1

FMVSS	SAE J845 WS3-2
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 1.04A / 36VDC36A
WT/DIMS	1.53 lbs. / 6.377" x 6.377" x 4.173"
WARRANTY	Lifetime LED Warranty




RBL10AS SERIES

LED Beacon

- 36-LED array produces bright yellow light
- Dual power: use with 12VDC or 24VDC systems
- Long lasting, energy efficient diodes last up to 50 times longer than incandescent, draw less than 1/2 amp
- Heavy duty magnetic base mounts securely to metal surfaces
- Durable ABS housing resists corrosion
- 12-ft coil cord with power plug

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELLOW B	EACON - 36 DIODES	
RBL10AS	-	Clam	2



MATERIALS ABS base, PMMA lens VOLT/AMP 10-30VDC - 0.5A


WT/DIMS .88 lbs - 5.125" x 5.125" x 3.5"
WARRANTY Lifetime LED Warranty





RBL10AS












RBL13/14 SERIES LED Surface Mount, Dual-Function Class 1 Beacon



- 30 selectable flash patterns
- Surface mount design
- Operating voltage 9-36VDC
- SAE J845 Class 1
- CA T13 Class B
- Packaged in color retail box



BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELLOW B	EACON - 12 DIODES	
RBL13AB	_	5.5", 12-ft. cord, dual switch	1
RBI 14AB	_	7" 12-ft cord dual switch	1



FMVSS	SAE J595 Class I
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 1.04A / 36VDC36A
WT/DIMS	RBL13 - 1.863 lbs. / 6.5" dia x 5.5"
	RBL14 - 1.863 lbs. / 6.5" dia x 7"
WARRANTY	Lifetime LED Warranty



SLL15 SERIES

Surface Mount LED Class 1 Directional Warning Lights

- Clear lens, ultrabright SMD LED's
- Surface mount design with gasket
- Operating voltage 10-30VDC
- Up to 133 selectable modes
- Synchronize up to eight units
- Meets SAE J595 for Class 1 vehicles
- IP67 rated for dust and water resistance
- Packaged in colorful retail boxes

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
١	ELLOW WARN	IING LIGHT - 6 DIODES	
SLL15AC1B	-	Single color - yellow	1
	WHITE WARNI	NG LIGHT - 6 DIODES	
SLL15C1B	-	Single color - white	1
YELL	OW/WHITE WA	<mark>RNI</mark> NG LIGHT - 12 DIODE:	S
SLL15ACC2B	3 -	Dual color - yellow/white	1
YELLO	<mark>W/R</mark> ED/WHITE I	WARNING L <mark>IGHT - 18 DIO</mark> I	DES
SLL15ARC3B	3 -	Triple color - red/yellow/white	1

FMVSS SAE J595 - Class 1

MATERIALS Polycarbonate lens, aluminum housing
VOLT/AMP 12.8VDC - 2.0A Max / 28.0VDC - 1.2A Max

WT/DIMS .2 lbs. / 5.13" x 0.87" x 0.74"
WARRANTY Lifetime LED Warranty





SLL15AC1B




SLL15C1B





SLL15ARC3B












SLL16C1B

SLL16 SERIES

Surface Mount LED, Class 1, Directional Warning Light

- Clear lens, ultrabright LED's
- Surface mount design with gasket
- Operating voltage 10-30VDC
- Up to 72 selectable modes
- Synchronize up to eight units
- Meets SAE J595 for Class 1 vehicles
- IP67 rated for dust and water resistance
- Packaged in colorful retail boxes

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	WHITE WARNI	NG LIGHT - 6 DIODES	
SLL16C1B	-	Clear lens, white diodes	1



FMVSS SAE J595 - Class 1

MATERIALS Polycarbonate lens, aluminum housing
VOLT/AMP 12.8VDC - 1.2A Max / 28.0VDC - 0.6A Max

 $\begin{array}{ll} \textbf{WT/DIMS} & .2 \text{ lbs.} \ / \ 5.13\text{"} \ x \ 0.87\text{"} \ x \ 0.74\text{"} \\ \textbf{WARRANTY} & \text{Lifetime LED Warranty} \end{array}$

SLL17 SERIES

Surface Mount LED Class 1 Directional Warning Lights

- Clear lens, ultrabright LED's
- · Surface mount design with gasket
- Operating voltage 10-30VDC
- Up to 133 selectable modes
- Synchronize up to eight units

FMVSS

- Meets SAE J595 for Class 1 vehicles
- IP67 rated for dust and water resistance
- Packaged in colorful retail boxes

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
Y	ELLOW WARN	IING LIGHT - 6 DIODES	
SLL17AC1B	-	Single color - yellow	1
	WHITE WARNI	NG LIGHT - 6 DIODES	
SLL17C1B	-	Single color - white	1
YELL	<mark>OW/W</mark> HITE WA	RNING LIGHT - 12 DIODES	
SLL17ACC2B	-	Dual color - yellow/white	1
YELLOV	<mark>V/R</mark> ED/WHITE \	<mark>WARNING L</mark> IGHT - 18 DIOD	ES
SLL17ARC3B	-	Triple color - red/yellow/white	1

	5/12 5555
MATERIALS	Polycarbonate lens, aluminum housing
VOLT/AMP	12.8VDC - 1.2A Max / 28.0VDC - 0.6A Max
WT/DIMS	.2 lbs. / 4.73" x 1.24" x 0.59"
WARRANTY	Lifetime LED Warranty

SAF J595 - Class 1







SLL17AC1B





SLL17C1B



SLL17ACC2B
















SLL22ACB

SLL22 SERIES

Surface Mount LED Directional Warning Light

- Sonically sealed, waterproof
- Compact, surface mount design with gasket
- 12 flash patterns and synchronization capability: random, steady, single, mega, double, triple, quad, quint, 8-flash, single-quad, single h/l and singletriple quint
- Operating voltage 9-36VDC
- Hard wired; 4-wire, 7" leads
- Wiring red: positive, black: negative, white: alternating flash, yellow: synchronization and flash pattern change
- Meets SAE J845 for Class II vehicles
- IP67 rating: protected from dust and capable of withstanding water immersion, offering increased reliability and service life



BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELLOW WAR	NING LIGHT - 3 DIODES	
SLL22ACB	SLL22ACBP	Clear lens, yellow diodes	1

FMVSS SAE J845 Class II

MATERIALS Polycarbonate lens, ABS trim ring

VOLT/AMP 13.5V - 0.45A

WT/DIMS .22 lbs / 4.70" x 1.04" x 1.84"

WARRANTY Lifetime LED Warranty

SLL51 SERIES

Surface Mount LED Directional Warning Light

- Sonically sealed, waterproof
- · Designed to flash simultaneously
- Operating voltage 9-36VDC
- · Surface mount design with gasket
- Hard wired; 3-wire, 7" leads
- Wiring red: positive, white: negative, yellow: sync
- Meets SAE J845 for Class II vehicles
- IP67 rating: protected from dust and capable of withstanding water immersion, offering increased reliability and service life

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELLOW WARN	IING LIGHT - 6 DIODES	
SLL51ACB	SLL51ACBP	Clear lens, yellow diodes	40
	WHITE WARNI	NG LIGHT - 6 DIODES	
SLL51CB	SLL51CBP	Clear lens, white diodes	40

FMVSS	SAF J845 Class II

MATERIALS Polycarbonate lens, ABS trim ring

VOLT/AMP 13.5V - 0.33A

WT/DIMS .49 lbs / 5.54" x 1.67" x 3.67"
WARRANTY Lifetime LED Warranty






SLL51ACB





SLL51CB













SLL81ACB





SLL81CB

SLL81 SERIES

Recess Mount LED Directional Warning Light

- Sonically sealed, waterproof
- Compact, surface mount design with gasket
- 12 flash patterns and synchronization capability: random, single flash, triple flash, mega, double, triplealt, quad, quintalt, flash, single-quad, single h/l and single-triple quint
- Operating voltage 9-36VDC
- Hard wired; 4-wire, 7" leads
- Wiring red: positive, black: negative, white: alternating flash, yellow: synchronization and flash pattern change
- Meets SAE J845 for Class II vehicles
- IP67 rating: protected from dust and capable of withstanding water immersion, offering increased reliability and service life

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELLOW WARN	ING LIGHT - 6 DIODES	
SLL81ACB	SLL81ACBP	Clear lens, yellow diodes	100
WHITE WARNING LIGHT - 6 DIODES			
SLL81CB	SLL81CBP	Clear lens, white diodes	100

FMVSS SAE J845 Class II

Polycarbonate lens, ABS trim ring **MATERIALS**

VOLT/AMP 13.5V - 1.3A

WT/DIMS 00.27 lb / 4.36" x 1.55" x 1.69"

WARRANTY Lifetime LED Warranty

GloLight® M1 SERIES 6.5" LED Marker/Clearance Lights

- · Sealed, waterproof design
- · Hard wired, includes separate ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YEL	LOW - 13 DIODES	
11212307B	11212355P	.180 male bullets	50
11212376B	11212356P	Clear lens, .180 male bullets	50
-	11212335P	Kit: .180 male bullets, chrome bezel	10
-	11212336P	Clear lens kit: .180 male bullets, chrome bezel	10
	R	ED - 13 DIODES	
11212309B	11212357P	.180 male bullets	50
11212378B	11212358P	Clear lens, .180 male bullets	50
-	11212337P	Kit: .180 male bullets, chrome bezel	10
-	11212338P	Cleanr lens kit: .180 male bullets, chrome bezel	10
	, and a second	ACCESSORIES	
00212317B	00212327P	Bezel	200/20

FMVSS	P2
MATERIALS	Polycarbonate lens, housing and bezel
VOLT/AMP	12.8VDC - 0.12A
WT/DIMS	.132 lbs. / 6.625" x 2.188" x 1"
WARRANTY	Three Year Warranty










M1 LED WITH BEZEL





M1 CLEAR LENS LED WITH BEZEL











GloLight® M3 SERIES 3" LED Marker/Clearance Lights

- Sealed, waterproof design
- Hard wired, includes separate ground wire




M3 LED WITH BEZEL



M3 CLEAR LENS LED WITH BEZEL

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YE	LLOW - 5 DIODES	
11212207B	11212255P	.180 male bullets	50
11212276B	11212256P	Clear lens, .180 male bullets	50
-	11212235P	Kit: .180 male bullets with chrome bezel	10
-	11212236P	Clear lens kit: .180 male bullets with chrome bezel	10
	1	RED - 5 DIODES	
11212209B	11212257P	.180 male bullets	50
11212278B	11212258P	Clear lens, .180 male bullets	50
-	11212237P	Kit: .180 male bullets with chrome bezel	10
-	11212238P	Clear lens kit: .180 male bullets with chrome bezel	10
		ACCESSORIES	
00212217B	00212227P	Bezel	500/20



HOLE CUT-OUT: 1.375"

FMVSS	P2
MATERIALS	Polycarbonate lens, housing and bezel
VOLT/AMP	12.8VDC - 0.12A
WT/DIMS	.132 lbs. / 3" x 2" x 1"
WARRANTY	Three Year Warranty



GloLight® M5 SERIES 4" LED Marker/Clearance Lights

- Sealed, waterproof design
- Hard wired, includes separate ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
YELLOW - 6 DIODES				
11212700B	11212708P	.180 male bullets	10	
11212700BB	11212700BBP	Blunt cut leads	10	
11212702B	11212710P	Clear lens, .180 male bullets	10	
-	11212704P	Kit: .180 male bullets with chrome bezel	10	
-	11212706P	Clear lens kit: .180 male bullets with chrome bezel	10	
	F	RED - 6 DIODES		
11212701B	11212709P	.180 male bullets	10	
11212703B	11212711P	Clear lens, .180 male bullets	10	
-	11212705P	Kit: .180 male bullets with chrome bezel	10	
-	11212707P	Clear lens kit: .180 male bullets with chrome bezel	10	
		ACCESSORIES		
00212717B	00212727P	Bezel	500/20	

	QTY
	10
	10
	10
	10
	10
	10
	10
	10
	40








M5 LED WITH BEZEL



M5 CLEAR LENS LED WITH BEZEL

FMVSS	P2
MATERIALS	Polycarbonate lens, housing and bezel
VOLT/AMP	12.8VDC - 0.033A
WT/DIMS	.066 lb. / 4.156" x 1.5" x .75"
WARRANTY	Three Year Warranty













M1 CLEAR LENS LED WITH BEZEL



M1 LED WITH BEZEL



M1 CLEAR LENS LED WITH BEZEL

M1 SERIES

Millennium Series® 6.5" Sealed LED Marker/Clearance Lights

- Sealed, waterproof design
- · Hard wired, includes separate ground wire
- Available with .180 male bullets or metripack connector
- Choose from light only or kit with chrome bezel

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
YELLOW - 4 DIODES			
00212307B	00212355P	.180 male bullets	50
-	00212335P	Kit: .180 male bullets, bezel	10
-	00212345P	Kit: Metripack connector, bezel	10
-	00212365P	Kit: Packard connector, bezel	10
00212376B	00212356P	Clear lens, .180 male bullets	10
-	00212336P	Kit: Clear lens, .180 male bullets, bezel	10
-	00212346P	Kit: Clear lens, metripack connector, bezel	10
		RED - 4 DIODES	
00212309B	00212357P	.180 male bullets	50
00212316B	00212367P	Metripack connector	100
-	00212337P	Kit: .180 male bullets, bezel	10
-	00212347P	Kit: Metripack connector, bezel	10
00212378B	00212358P	Clear lens, .180 male bullets	50
00212386B	00212368P	Clear lens, metripack connector	100
-	00212338P	Kit: Clear lens, .180 male bullets, bezel	10
		ACCESSORIES	
00212317B	00212327P	Bezel	200/20






FMVSS P2

MATERIALS Polycarbonate lens, housing and bezel

VOLT/AMP 12.8VDC - 0.12A

WT/DIMS .132 lbs. / 6.625" x 2.188" x 1"

WARRANTY Three Year Warranty



HOLE CUT-OUT: 1.5"


M3 SERIES

Millennium Series® 3" Sealed LED Marker/Clearance Lights

- · Sealed, waterproof design
- · Hard wired, includes separate ground wire
- Available with .180 male bullets or metripack connector
- Choose from light only or kit with chrome bezel

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
YELLOW - 2 DIODES			
00212207B	00212255P	.180 male bullets	50
-	00212235P	Kit: .180 male bullets, bezel	10
00212276B	00212256P	Clear lens, .180 male bullets	50
00212213B	00212263P	Clear lens, metripack connector	50
-	00212236P	Kit: Clear lens, .180 male bullets, bezel	10
		RED - 2 DIODES	
00212209B	00212257P	.180 male bullets	50
-	00212237P	Kit: .180 male bullets, bezel	10
00212278B	00212258P	Clear lens, .180 male bullets	50
-	00212238P	Kit: Clear lens, .180 male bullets, bezel	10
		ACCESSORIES	
00212217B	00212227P	Bezel	500/20

FMVSS	P2
MATERIALS	Polycarbonate lens, housing and bezel
VOLT/AMP	12.8VDC - 0.36A
WT/DIMS	.132 lbs. / 3" x 2" x 1"
WARRANTY	Three Year Warranty



HOLE CUT-OUT: 1.375"









M3 CLEAR LENS LED WITH BEZEL



M3 LED WITH BEZEL



M3 CLEAR LENS LED WITH BEZEL












M4 LED MARKER/CLEARANCE LIGHTS WITH BEZEL

M4 SERIES

Millennium Series® 9" Sealed LED Lights

- Sealed, waterproof design
- Hard wired, includes separate ground wire
- Chrome trim ring included in kits or available separately

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
YELL	YELLOW MARKER/CLEARANCE - 6 DIODES				
00212104B	00212155P	.180 male bullets	10		
-	00212135P	Kit: .180 male bullets, bezel	10		
RE	RED MARKER/CLEARANCE - 6 DIODES				
-	00212157P	.180 male bullets	10		
-	00212137P	Kit: .180 male bullets, bezel	10		
ACCESSORIES					
00212117B	00212127P	Bezel	70/20		



HOLE CUT-OUT: 2.5"

FMVSS P2

MATERIALS Polycarbonate lens, housing and bezel

12.8VDC - 0.090A **VOLT/AMP** WT/DIMS .132 lbs. / 9" x 3.25" x 1" WARRANTY Three Year Warranty



M5 SERIES

Millennium Series® 4" Sealed LED Marker/Clearance Lights

- · Sealed, waterproof design
- · Hard wired, includes separate ground wire
- Available with .180 male bullets or metripack connector
- · Choose from light only or kit with chrome bezel

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
YELLOW - 3 DIODES			
00212700B	00212708P	.180 male bullets	10
00212702B	00212710P	Clear lens, .180 male bullets	10
-	00212704P	Kit: .180 male bullets, bezel	10
-	00212706P	Kit: Clear lens, .180 male bullets, bezel	10
-	00212712P	Clear lens, metripack connector	10
		RED - 3 DIODES	
00212701B	00212709P	.180 male bullets	10
00212703B	00212711P	Clear lens, .180 male bullets	10
-	00212705P	Kit: .180 male bullets, bezel	10
-	00212707P	Kit: Clear lens, .180 male bullets, bezel	10
		ACCESSORIES	
00212717B	00212727P	Bezel	500/20





M5 LED WITH BEZEL



M5 CLEAR LENS LED WITH BEZEL



M5 LED WITH BEZEL



M5 CLEAR LENS LED WITH BEZEL

FMVSS P2

MATERIALS Polycarbonate lens, housing and bezel


VOLT/AMP 12.8VDC - 0.033A

WT/DIMS .066 lb. / 4.156" x 1.5" x .75"

WARRANTY Three Year Warranty













MCL11SAB





MCL11SRB





MCL11SACKB







MCL11SRCKB



MCL11S SERIES


3/4" Sealed LED Marker/Clearance **Lights with Theft-Deterrent Design**


PATENTED TECHNOLOGY



- Sealed, waterproof design
- Recess mount lights with theft-deterrent mounting design
- Easy to install: insert light into mounting hole and secure with locking ring
- PC rated: fulfills requirement for marker and clearance light when properly mounted

	BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	YELLOW - 1 DIODE				
	MCL11SAB	MCL11SABP	Light with gasket, .180 bullets	50	
	MCL11SAKB	MCL11SAKBP	Light with gasket & locking ring .180 bullets	50	
	MCL11SAK1B	MCL11AK1BP	Light with gasket and locking ring	50	
	MCL11SACKB	MCL11SACKBP	Clear lens, yellow diodes with gasket & locking ring, .180 bullets	50	
		REI) - 1 DIODE		
	MCL11SRB	MCL11SRBP	Light with gasket, .180 bullets	50	
	MCL11SRKB	MCL11SRKBP	Light with gasket & locking ring .180 bullets	50	
	MCL11SRK1B	MCL11SRK1BP	Light with gasket and locking ring	50	
	MCL11SRCKB	MCL11SRCKBP	Clear lens, red diodes with gasket & locking ring, .180 bullets	50	
		ACC	ESSORIES		
	A11SRB	A11SRBP	Stainless steel locking ring	100	
	FMVSS	PC			
MATERIALS Polycarbonate lens and housing, stainless steel lo ring, EPDM rubber gasket				ıg	
	VOLT/AMP	12.8VDC082	Α		
WT/DIMS .10 lbs. / 1" x 1" x .875"			x .875"		
	WARRANTY	WARRANTY Lifetime LED Warranty			





MCL110 SERIES

GloLight® Uni-Lite™ 3/4" LED Non-Directional Marker/Clearance Lights



PATENTED TECHNOLOGY

- Sealed, waterproof design
- PC rated when mounted in any direction 360 degrees!
- · Hard wired, includes separate ground wire
- Choose from light only or kit with A11GB grommet

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELLOW - I	PC RATED - 2 DIODES	
MCL110AB	MCL110ABP	Light only	50
MCL110AKB	MCL110AKBP	Light with A11GB grommet	50
MCL110AKBF	MCL110AKBFP	Light kit with grommet, .156 female barrels on 8" leads	50
RED - PC RATED - 2 DIODES			
MCL110RB	MCL110RBP	Light only	50
MCL110RKB	MCL110RKBP	Light with A11GB grommet	50
MCL110RKBF	MCL110RKBFP	Light kit with grommet, .156 female barrels on 8" leads	50
ACCESSORIES			
A11AXB	A11AXBP	Yellow reflector	100
AMADVD	AMANDAD	Dad vaflastav	100

	AC	CESSORIES	
A11AXB	A11AXBP	Yellow reflector	100
A11RXB	A11RXBP	Red reflector	100
A11GB	A11GBP	Grommet	100
A12GB	A12GBP	Sealing grommet, .070125"	100
A14GB	A14GBP	Sealing grommet, .125250"	100
A11PB	A11PBP	Black plastic snap-in flange	100
A11CRB	A11CRBP	Chrome finish grommet cover	120
A11SSB	A11SSBP	Stainless steel grommet cover	120


FMVSS	PC
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 0.052A
WT/DIMS	.022 lbs. / .073" x .073" x 0.938"
WARRANTY	Lifetime LED Warranty





















GloLight® Uni-Lite™ 3/4" Sealed **LED Marker/Clearance Lights**

MCL111AKB

PATENTED TECHNOLOGY

C Rated

QTY

- Sealed, waterproof design
- PC rated two diode models

BULK P/N

Hard wired, includes separate ground wire


POLYPACK P/N

- Choose from light only or kit with A11GB grommet
- Dual function models MCL121AK9PVG/RK9PVG provide a supplemental stop/turn function

DESCRIPTION



	YELLOW - PC	RATED - 2 DIODES	
MCL111AB	MCL111ABP	Light only	50
MCL111AKB	MCL111AKBP	Light with A11GB grommet	50
MCL111AKPG	MCL111AKPGP	Kit with .180 male bullets, A11GB	50
MCL121AK9PVG	MCL121AK9PVGP	Supplemental turn - kit with closed grommet, .180 male bullets	20
	RED - PC RA	ATED - 2 DIODES	
MCL111RB	MCL111RBP	Light only	50
MCL111RKB	MCL111RKBP	Light with A11GB grommet	50
MCL111RKPG	MCL111RKPGP	Kit with .180 male bullets, A11GB	50
MCL121RK9PVG	MCL121RK9PVGP	Supplemental turn - kit with closed grommet, .180 male bullets	20
	ACCE	SSORIES	
A11AXB	A11AXBP	Yellow reflector	100
A11RXB	A11RXBP	Red reflector	100
A11GB	A11GBP	Grommet	100
A12GB	A12GBP	Sealing grommet, .070125"	100
A14GB	A14GBP	Sealing grommet, .125250"	100
A11PB	A11PBP	Black plastic snap-in flange	100
A11CRB	A11CRBP	Chrome finish grommet cover	120
A11SSB	A11SSBP	Stainless steel grommet cover	120



FMVSS	PC
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 0.04A
WT/DIMS	.022 lbs. / .75" x .75" x 0.875"
WARRANTY	Lifetime LED Warranty



MCL112 SERIES

GloLight® Uni-Lite™ 3/4" Sealed LED Marker/Clearance Lights

PATENTED TECHNOLOGY

- Sealed, waterproof design
- P2 rated single diode models
- Hard wired, includes separate ground wire
- Choose from light only or kit with A11GB grommet


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
	YELLOW - P2 RATED - 1 DIODE				
MCL112AKB	MCL112AKBP	Light with A11GB grommet	50		
	RED - P2 I	RATED - 1 DIODE			
MCL112RB	MCL112RBP	Light only	50		
MCL112RKB	MCL112RKBP	Light with A11GB grommet	50		
	ACC	ESSORIES			
A11AXB	A11AXBP	Yellow reflector	100		
A11RXB	A11RXBP	Red reflector	100		
A11GB	A11GBP	Grommet	100		
A12GB	A12GBP	Sealing grommet, .070125"	100		
A14GB	A14GBP	Sealing grommet, .125250"	100		
A11PB	A11PBP	Black plastic snap-in flange	100		
A11CRB	A11CRBP	Chrome finish grommet cover	120		
A11SSB	A11SSBP	Stainless steel grommet cover	120		

GloLight





FMVSS	P2
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC075A
WT/DIMS	.022 lbs. / .75" x .75" x 0.875"
WARRANTY	Lifetime LED Warranty










MCL10 SERIES

Uni-Lite™ 3/4" LED Non-Directional Marker/Clearance Lights PC Rated





MCL10AB




- PC rated when mounted in any direction 360 degrees!
- Hard wired, includes separate ground wire





MCL10ACKB





HOLE CUT-OUT: .75"

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELLOW	- 1 DIODE	
MCL10AB	MCL10ABP	Light only	50
MCL10AKB	MCL10AKBP	Light with A11GB grommet	50
MCL10AK1224B	MCL10AK1224BP	Light with A11GB grommet, 12/24V	50
MCL10AKA12B	MCL10AKA12BP	Light with A12GB grommet, 7.5-in. leads	50
MCL10AKL12B	MCL10AKL12BP	Light with A12GB grommet, 12-in. leads	50
MCL10AK12JPG	MCL10AK12JPGP	Light with A11GB grommet, 12-in. leads, .156 male bullets	50
MCL10AKL12PG	MCL10AKL12PGP	Light with A11GB grommet, 12-in. leads, .180 male bullets	50
MCL10AKL12PGN	MCL10AKL12PGNP	Light with A12GB grommet, 12-in. leads, .180 male bullets	50
MCL10AKL18JPG	MCL10AKL18JPGP	Light with A12GB grommet, 18-in. leads, .180 male bullets	50
MCL10AKA10PG	MCL10AKA10PGP	Light with A10GB grommet, .180 male bullets	50
MCL10AK1FPG	MCL10AK1FPGP	Light with A12GB grommet, .156 female barrels	50
MCL10ACKB	MCL10ACKBP	Clear lens with A11GB grommet	50
MCL10ACKA12B	MCL10ACKA12BP	Clear lens with A12GB grommet	50
MCL10CAK14B	MCL10CAK14BP	Clear lens with grommet, 14-in. leads	50
MCL10ACKPG	MCL10ACKPGP	Clear lens with A11GB grommet .180 male bullets	50
MCL10ACKA12PG	MCL10ACKA12PGP	Clear lens with A12GB grommet, .180 male bullets	50
MCL10ACK12JPG	MCL10ACK12JPGP	Clear lens light with A11GB grommet, 12-in. leads, .156 male bullets	50
FMVSS MATERIALS	PC	d bb	

FMVSS	PC
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 0.52A
WT/DIMS	.022 lbs. / .073" x .073" x .938"
WARRANTY	Lifetime LED Warranty

MCL10 SERIES

Uni-Lite™ 3/4" LED Non-Directional NON Marker/Clearance Lights



- PC rated when mounted in any direction 360 degrees!
- Hard wired, includes separate ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	RED - 1	DIODE	
MCL10RB	MCL10RBP	Light only	50
MCL10RKB	MCL10RKBP	Light with A11GB grommet	50
MCL10RK1224B	MCL10RK1224BP	Light with A11GB grommet, 12/24V	50
MCL10RKA12B	MCL10RKA12BP	Light with A12GB grommet, 7.5-in. leads	50
MCL10RKL12B	MCL10RKL12BP	Light with A12GB grommet, 12-in. leads	50
MCL10RK12JPG	MCL10RK12JPGP	Light with A11GB grommet, 12-in. leads, .156 male bullets	50
MCL10RKL12PG	MCL10RKL12PGP	Light with A11GB grommet, 12-in. leads, .180 male bullets	50
MCL10RKL12PGN	MCL10RKL12PGNP	Light with A12GB grommet, 12-in. leads, .180 male bullets	50
MCL10RKL18JPG	MCL10RKL18JPGP	Light with A12GB grommet, 18-in. leads, .180 male bullets	50
MCL10RKA10PG	MCL10RKA10PGP	Light with A10GB grommet, .180 male bullets	50
MCL10RKDTPG	MCL10RKDTPGP	Light with A11GB grommet, .180 male bullets, three-wire	20
MCL10RK1FPG	MCL10RK1FPGP	Light with A12GB grommet, .156 female barrels	50
MCL10RCKB	MCL10RCKBP	Clear lens with A11GB grommet	50
MCL10RCKA12B	MCL10RCKA12BP	Clear lens with A12GB grommet	50
MCL10CRK14B	MCL10CRK14BP	Clear lens with grommet, 14-in. leads	50
MCL10RCKA12PG	MCL10RCKA12PGP	Clear lens with A12GB grommet, .180 male bullets	50
MCL10RCKPG	MCL10RCKPGP	Clear lens with A11GB grommet, .180 male bullets	50
MCL10RCK12JPG	MCL10RCK12JPGP	Clear lens light with A11GB grommet, 12-in. leads, .156 male bullets	50

FMVSS	PC
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 0.52A
WT/DIMS	.022 lbs. / .073" x .073" x .938"
WARRANTY	Lifetime LED Warranty





MCL10RB




MCL10RKB



MCL10RCKB





HOLE CUT-OUT: .75"














MCL11RKB



HOLE CUT-OUT: 0.75"

FMVSS PC
MATERIALS Polycarbonate lens and housing
VOLT/AMP 12.8VDC - 0.03A
WT/DIMS .022 lbs. / .074" x .074" x 0.90"
WARRANTY

Lifetime LED Warranty

MCL11 SERIES

Uni-Lite[™] 3/4" Sealed LED Marker/Clearance Lights

- Sealed, waterproof design
- Hard wired, includes separate ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELLOW -	PC RATED - 2 DIODES	
MCL11AB	MCL11ABP	Light only	50
MCL11APG	MCL11APGP	Light with .180 male bullets	50
MCL11AKB	MCL11AKBP	Kit with A11GB grommet	50
MCL11AK12B	MCL11AK12BP	Kit with A11GB grommet, 12" leads	50
MCL11A24KB	MCL11A24KBP	Kit with A11GB grommet, 24V, 24" leads	50
MCL11AHPG	MCL11AHPGP	Kit with .180 male bullets, A11GB	50
MCL11AKPVG	MCL11AKPVGP	Kit with sealed grommet, .180 male bullets	50
MCL11AK12PG	MCL11AK12PGP	Kit with 12" leads, A11GB, .156 male bullets	50
MCL11AKBF	MCL11AKBFP	Kit with .156 female barrels, A11GB	50
MCL11AKAB	MCL11AKABP	Kit with .156 female barrels, A11GB	50
MCL11AKPRB	MCL11AKPRBP	Kit with A11GB, .150 female barrels, 2.5" leads	50
MCL11CAB	MCL11CABP	Light only, clear lens	50
MCL11CAKB	MCL11CAKBP	Kit with A11GB, clear lens	50
MCL11CAKPG	MCL11CAKPGP	Kit with A11GB, clear lens, .180 male bullets	50
MCL11CAKBF	MCL11CAKBFP	Kit with A11GB, clear lens, .156 female barrels	50
MCL21AKRGVB	MCL21AKRGVBP	Assembly: (2) MCL11, sealing grommets, ring terminals on 262-in. 3-wire	10
MCL21AKRYVB	MCL21AKRYVBP	Assembly: (2) MCL11, sealing grommets, ring terminals on 190-in. 3-wire	10
	RED - PO	C RATED - 2 DIODES	
MCL11RB	MCL11RBP	Light only	50
MCL11RPG	MCL11RPGP	Light with .180 male bullets	50
MCL11RKB	MCL11RKBP	Kit with A11GB grommet	50
MCL11RK12B	MCL11RK12BP	Kit with 12" leads, A11GB	50
MCL11R24KB	MCL11R24KBP	Kit with A11GB grommet, 24V, 24" leads	50
MCL11RK12PG	MCL11RK12PGP	Kit with 12" leads, A11GB, .156 male bullets	50
MCL11RHPG	MCL11RHPG	Kit with .180 male bullets, A11GB	50
MCL11RKPVG	MCL11RKPVG	Kit with sealed grommet, .180 male bullets	50
MCL11RKBF	MCL11RKBFP	Kit with .156 female barrels, A11GB	50
MCL11RKAB	MCL11RKABP	Kit with .156 female connectors, A11GB	50
MCL11CRB	MCL11CRBP	Light only, clear lens	50
MCL11CRKB	MCL11CRKBP	Kit with A11GB, clear lens	50
MCL11CRKPG	MCL11CRKPGP	Kit with A11GB, clear lens, .180 male bullets	50
MCL11CRKBF	MCL11CRKBFP	Kit with A11GB, clear lens, .156 female barrels	50
MCL11RKPV4G	MCL11RKPV4GP	Kit with sealed grommet, female amp connector	50
MCL21RKPVG	MCL21RKPVGP	Kit with sealed grommet, 12-ft. leads, .180 male bullets	10
MCL21RKPV4G	MCL21RKPV4GP	Assembly: (2) MCL11, sealing grommets,	10

See Accessories section at back of catalog or listing on previous pages for additional mounting options

ring terminals on 262-in. 3-wire

MCL12 SERIES Uni-Lite™ 3/4" Sealed LED Marker/Clearance Lights - P2

- Sealed, waterproof, P2 rated single diode models
- Hard wired, includes separate ground wire
- Three-piece identification light harnesses available; optional supplemental turn function

• MCL	922RB is three	-piece identification light bar	
BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELLOW -	P2 RATED - 1 DIODE	
MCL12AB	MCL12ABP	Light only	50
MCL12AKB	MCL12AKBP	Light kit with A11GB	50
MCL12AKPG	MCL12AKPGP	Light kit with .180 male bullets, A11GB	50
	RED - P2	RATED - 1 DIODE	
MCL12RB	MCL12RBP	Light only	50
MCL12RKB	MCL12RKBP	Light kit with A11GB	50
MCL12RKPG	MCL12RKPGP	Light kit with .180 male bullets, A11GB	50
RED IDEN	ITIFICATION LIC	SHT KIT WITH MOLDED HARNES	SS
MCL12RK3B	MCL12RK3BP	(3) red MCL12 lights	20
MCL12RK3RMB	MCL12RK3RMBP	(3) red MCL12 lights, weathertight plug	20
MCL22RK3B	MCL22RK3BP	(3) red MCL12 lights, supplemental turn function	20
MCL22RK4B	MCL22RK4BP	(3) red MCL12 lights, supplemental turn function, amp connector	20
	RED IDENTI	FICATION LIGHT BAR	
MCL922RB	MCL922RBP	(3) red MCL12 lights, molded bar, black	10
	AC	CESSORIES	
Λ11 Λ V D	A 11 A V D D	Vallow reflector	100


MCL922RB	MCL922RBP	(3) red MCL12 lights, molded bar, black	10
	A	CCESSORIES	
A11AXB	A11AXBP	Yellow reflector	100
A11RXB	A11RXBP	Red reflector	100
A11GB	A11GBP	Grommet	100
A12GB	A12GBP	Sealing grommet, .070125"	100
A14GB	A14GBP	Sealing grommet, .125250"	100
A11PB	A11PBP	Black plastic snap-in flange	100
A11CRB	A11CRBP	Chrome finish grommet cover	120
A11SSB	A11SSBP	Stainless steel grommet cover	120
		RETAIL	
MCL12AK		Yellow light kit, card/slipover blister	12
MCL12RK	Retail Ready	Red light kit, card/slipover blister	12



MCL12RKB



MCL12RK3B



HOLE CUT-OUT: 0.75"

FMVSS P2
MATERIALS Polycarbonate lens and housing
VOLT/AMP 12.8VDC - 0.47A
WT/DIMS .022 lbs. / .074" x .074" x 0.90"
WARRANTY Lifetime LED Warranty












Uni-Lite™ 3/4" Sealed LED **Fender Lights**



- Hard wired, includes separate ground wire
- Available with clear or tinted lenses




d	

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELLOW /	RED FENDER LIGHTS	
MCL12ARLB	MCL12ARLBP	Driver side assembly, 2-wire	50
MCL12ARRB	MCL12ARRBP	Passenger side assembly, 2-wire	50
MCL12CA2RLB	MCL12CA2RLBP	Clear lens, driver side assembly, self grounding	50
MCL12CA2RRB	MCL12CA2RRBP	Clear lens, passenger side assembly, self grounding	50
	AC	CESSORIES	
A11GB	A11GBP	Grommet	100

FMVSS	P2
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 0.047A
WT/DIMS	.20 lbs. / 4.75" x 1.625" x 1.25"
WARRANTY	Lifetime LED Warranty







MCL21/23 SERIES 2" & 2.5" Sealed LED Beehive Style Marker/Clearance Lights

- Sonically sealed, waterproof
- Clearance, side marker, or rear tracking light applications
- Accepts standard two-pin PL-10 plug

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YE	ELLOW - 8 DIODES	
MCL21AB	MCL21ABP	2" light	20
MCL23AB	MCL23ABP	2.5" light	20
		RED - 8 DIODES	
MCL21RB	MCL21RBP	2" light	20
MCL23RB	MCL23RBP	2.5" light	20
		ACCESSORIES	
A46PB	A46PBP	Straight PL-10 plug, 6" lead	100
A86PB	A86PBP	Straight PL-10 plug, 18" lead	100
A54GB	A54GBP	2" Flush mount grommet	100
A54GK	A54GKP	2" Kit: A54GB and A46PB	100
A55CB	A55CBP	2" Chrome trim ring	20
A55GB	A55GBP	2.5" Flush mount grommet (open back)	50
A56GB	A56GBP	2.5" Recess mount grommet (closed back)	100
A57GB	A57GBP	2.5" Recess mount grommet (open back)	50
A55GK	A55GKP	2.5" Kit: A55GB and A46PB	100
A57GK	A57GKP	2.5" Kit: A57GB and A46PB	100
A57CB	A57CBP	2.5" Chrome trim ring	20
BK5557GB	BK5557GBP	2"/2.5" Cam-on mounting bracket	50

FMVSS	P2
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	MCL21: 12.8VDC - 0.061A
	MCL23: 12.8VDC - 0.051A
WT/DIMS	MCL21: .110 lbs. / 2" x 2" x 1.75"
	MCL23: .176 lbs. / 2.5" x 2.5" x 2.313"
WARRANTY	Lifetime LED Warranty













MCL23RB





MCL21 SERIES HOLE CUT-OUT: 2.313"









2 5/16"





MCL155AB



MCL155 SERIES


GloLight® 2" Round Sealed **LED Marker/Clearance Lights**

PATENTED TECHNOLOGY

- Sonically sealed, waterproof
- Accepts standard two-pin PL-10 plug
- Recess grommet mount design

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
YELLOW - 6 DIODES			
MCL155AB	MCL155ABP	Grommet mount	20
	RED -	- 6 DIODES	
MCL155RB	MCL155RBP	Grommet mount	20
ACCESSORIES			
A46PB	A46PBP	Straight PL-10 plug, 6" lead	100
A86PB	A86PBP	Straight PL-10 plug, 18" lead	100
A54GB	A54GBP	2" Flush mount grommet	100
A54GK	A54GKP	2" Kit: A54GB and A46PB	100
A55CB	A55CBP	2" Chrome trim ring	20
BK5557GB	BK5557GBP	Cam-on mounting bracket	50

FMVSS	P2
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 0.06A
WT/DIMS	Grommet Mount: .066 lbs. / 2" x 2" x 1"
	Flange Mount: .078 lbs. / 2.938" x 2.938" x .938"
WARRANTY	Lifetime LED Warranty



MCL155AB/RB HOLE CUT-OUT: 2.313"

MCL55 SERIES

2" Round Sealed LED Marker/Clearance Lights

- Sonically sealed, waterproof
- Accepts standard two-pin PL-10 plug
- Available in 12V and 12-24V models

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELLO	W - 3 DIODES	
MCL55AB	MCL55ABP	Grommet mount, 12V	20
MCL55ACB	MCL55ACBP	Clear lens grommet mount, 12V	20
MCL55A1224B	MCL55A1224BP	Grommet mount, 12-24V	20
	RED ·	- 3 DIODES	
MCL55RB	MCL55RBP	Grommet mount, 12V	20
MCL55RCB	MCL55RCBP	Clear lens grommet mount, 12V	20
MCL55R1224B	MCL55R1224BP	Grommet mount, 12-24V	20
MCL55FRB	MCL55FRBP	Flange mount, 12V	50
	UTILITY LI	GHT - 3 DIODES	
UCL55CB	UCL55CBP	White LED, 12V	20
	ACC	ESSORIES	
A46PB	A46PBP	Straight PL-10 plug, 6" lead	100
A86PB	A86PBP	Straight PL-10 plug, 18" lead	100
A54GB	A54GBP	2" Flush mount grommet	100
A54GK	A54GKP	2" Kit: A54GB and A46PB	100
A55CB	A55CBP	2" Chrome trim ring	20
BK5557GB	BK5557GBP	Cam-on mounting bracket	50
	F	RETAIL	
MCL55AK	Yellow kit with A54	IGB & A46PB, clam	12
MCL55RK	Red kit with A54G	B & A46PB, clam	12

FMVSS	P2	
MATERIALS	Polycarbonate lens and housing	
VOLT/AMP	12.8VDC - 0.06A	
WT/DIMS	MCL55:	.066 lbs. / 2" x 2" x 1"
	MCL55FRB:	.078 lbs. / 2.875" x 2.875" x 1"
WARRANTY	Lifetime LED Warranty	








MCL55RB








HOLE CUT-OUT: 2.313"



MCL55FRB




HOLE CUT-OUT: 2.313"







MCL505ABSB






HOLE CUT-OUT: 2.313"



MCL505GABSB



HOLE CUT-OUT: 2.313"

MCL505 SERIES 2" Round Sealed LED ABS Lights

- Sonically sealed, waterproof
- Accept standard two-pin PL-10 plugs
- Available in grommet and flange mount models
- MCL505GABSB includes A54GB grommet

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELLOW	- 3 DIODES	
MCL505ABSB	MCL505ABSBP	Flange mount	50
MCL505GABSB	MCL505GABSBP	Grommet mount kit, with A54GB grommet	20
	ACCE	SSORIES	
A46PB	A46PBP	Straight PL-10 plug, 6" lead	100
A86PB	A86PBP	Straight PL-10 plug, 18" lead	100

FMVSS	P2
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC06A
WT/DIMS	MCL505ABSB: .078 lbs. / 2.875" x 2.875" x 1"
	MCL505GABSB: .066 lbs. / 2" x 2" x 1"
WARRANTY	Lifetime LED Warranty



MCL56 SERIES

FLEET Count™ 2" Round Sealed LED Marker/Clearance Lights


- Sonically sealed, waterproof
- Accepts standard two-pin PL-10 plug
- · Multiple mounting options available


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YEI	LOW - 1 DIODE	
MCL56AB	MCL56ABP	Grommet mount, PL-10 connection	20
MCL56AFB	MCL56AFBP	Flange mount, PL-10 connection	20
MCL56AFMB	MCL56AFMBP	Flange mount, weathertight connection	20
	R	ED - 1 DIODE	
MCL56RB	MCL56RBP	Grommet mount, PL-10 connection	20
MCL56RMB	MCL56RMBP	Grommet mount, weathertight connection	20
MCL56RFB	MCL56RFBP	Flange mount, PL-10 connection	20
MCL56RFMB	MCL56RFMBP	Flange mount, weathertight connection	20
	Α	CCESSORIES	
A46PB	A46PBP	Straight PL-10 plug, 6" lead	100
A86PB	A86PBP	Straight PL-10 plug, 18" lead	100
A54GB	A54GBP	2" Flush mount grommet	100
A54GK	A54GKP	2" Kit: A54GB and A46PB	100
A55CB	A55CBP	2" Chrome trim ring	20
BK5557GB	BK5557GBP	Cam-on mounting bracket	50
		RETAIL	
MCL56AK		Yellow kit with A54GB & A46PB, clam	12
MCL56AK6	Retail Ready	Yellow kit with A54GB & A46PB, clam	6
MCL56AS		Yellow light only, clam	12
MCL56RK		Red kit with A54GB & A46PB, clam	12
MCL56RK6		Red kit with A54GB & A46PB, clam	6
MCL56RS		Red light only, clam	12

FMVSS	P2
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 0.045A
WT/DIMS	Grommet mount: .066 lbs. / 2" x 2" x 1"
	Flange mount: .071 lbs. / 2.938" x 2.938" x .938"
WARRANTY	Lifetime LED Warranty















MCL56AFMB



MCL56AFB



MCL56RFMB



MCL56RFB











MCL52AHXB


MCL52AHXB

2" Round Sealed LED Marker/Clearance Light with Reflex Lens and Flange

- Recess flange mount
- Sonically sealed, waterproof
- Hard wired, includes separate ground wire
- Built-in reflex eliminates the need for a separate reflector

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
YELLOW - 7 DIODES			
MCL52AHXB	MCL52AHXBP	Reflex flange	50

FMVSS	A P2
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 0.63A
WT/DIMS	.088 lbs. / 3.063" x 3.063" x .813"
WARRANTY	Lifetime LED Warranty



MCL50 SERIES Miro-Flex[™] 2" Round Sealed LED Marker/Clearance Lights

- Sonically sealed, waterproof
- Accepts standard two-pin PL-10 plug
- Multiple mounting options available

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	YELLOW - 9 DIODES			
MCL50AB	MCL50ABP	Light only	20	
	RE	ED - 9 DIODES		
MCL50RB	MCL50RBP	Light only	20	
ACCESSORIES				
A46PB	A46PBP	Straight PL-10 plug, 6" lead	100	
A86PB	A86PBP	Straight PL-10 plug, 18" lead	100	
A54GB	A54GBP	2" Flush mount grommet	100	
A54GK	A54GKP	2" Kit: A54GB and A46PB	100	
A55CB	A55CBP	2" Chrome trim ring	20	
BK5557GB	BK5557GBP	Cam-on mounting bracket	50	












FMVSS	P2

Polycarbonate lens and housing **MATERIALS**

VOLT/AMP 12.8VDC - 0.047A WT/DIMS .088 lbs. / 2" x 2" x 1.188"

WARRANTY Lifetime LED Warranty



HOLE CUT-OUT: 2.313"







MCL52/54 SERIES 2" Round Sealed LED Marker/Clearance Lights PCRated





MCL54AB


MCL52AB

MCL52RB



MCL54RB

- Sonically sealed, waterproof
- Available with standard PL-10 or optional weathertight connection
- PC rated: functions as both clearance and side marker light when properly mounted on a 45 degree angle
- Available in flange mount and grommet mount models

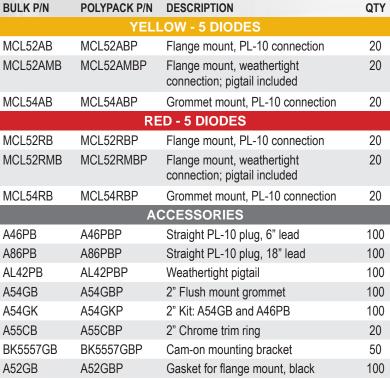


		connection; pigtail included
MCL54AB	MCL54ABP	Grommet mount, PL-10 connection
	RI	ED - 5 DIODES
MCL52RB	MCL52RBP	Flange mount, PL-10 connection
MCL52RMB	MCL52RMBP	Flange mount, weathertight connection; pigtail included
MCL54RB	MCL54RBP	Grommet mount, PL-10 connection
	А	CCESSORIES
A46PB	A46PBP	Straight PL-10 plug, 6" lead
A86PB	A86PBP	Straight PL-10 plug, 18" lead
AL42PB	AL42PBP	Weathertight pigtail
A54GB	A54GBP	2" Flush mount grommet
A54GK	A54GKP	2" Kit: A54GB and A46PB
A55CB	A55CBP	2" Chrome trim ring
BK5557GB	BK5557GBP	Cam-on mounting bracket
A52GB	A52GBP	Gasket for flange mount, black


detail of weathertight connection on MCL52AMB/RMB; pigtail included

← 2 1/4" ► -	15/16"
	2 15/16"
MCL5	52

HOLE CUT-OUT: 2.313"

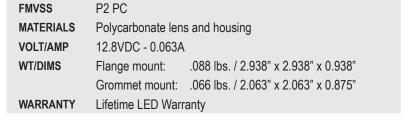

7/8"



MCL54

HOLE CUT-OUT: 2.313"

MCL157 SERIES

GloLight® 2.5" Round Sealed LED Marker/Clearance Lights

PATENTED TECHNOLOGY

- · Sonically sealed, waterproof
- Accepts standard two-pin PL-10 plug


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
YELLOW - 9 DIODES			
MCL157AB	MCL157ABP	Light only	20
	RI	ED - 9 DIODES	
MCL157RB	MCL157RBP	Light only	20
	Α	CCESSORIES	
A46PB	A46PBP	Straight PL-10 plug, 6" lead	100
A86PB	A86PBP	Straight PL-10 plug, 18" lead	100
A55GB	A55GBP	Flush mount grommet (open back)	50
A56GB	A56GBP	Recess mount grommet (closed back)	100
A57GB	A57GBP	Recess mount grommet (open back)	50
A55GK	A55GKP	Kit: A55GB and A46PB	100
A57GK	A57GKP	Kit: A57GB and A46PB	100
A57CB	A57CBP	Chrome trim ring	20
BK5557GB	BK5557GBP	Cam-on mounting bracket	50

FMVSS	P2
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 0.099A
WT/DIMS	.132 lbs. / 2.5" x 2.5" x 1.125"
WARRANTY	Lifetime LED Warranty









HOLE CUT-OUT: 2.75"










MCL57AB



MCL57RB



MCL57ACB/RCB



HOLE CUT-OUT: 2.75"

MCL57 SERIES

2.5" Round Sealed LED Marker/Clearance Lights

- Sonically sealed, waterproof
- Accepts standard two-pin PL-10 plug
- Available in 12V and 24V models

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	YELL	OW - 3 DIODES		
MCL57AB	MCL57ABP	Light only, 12V	20	
MCL57A24B	MCL57A24BP	Light only, 24V	20	
MCL57ACB	MCL57ACBP	Clear lens light only, 12V	20	
	REI	D - 3 DIODES		
MCL57RB	MCL57RBP	Light only, 12V	20	
MCL57RKB	MCL57RKBP	Kit with grommet and plug	20	
MCL57R1224B	MCL57R1224BP	Light only, 12-24V	20	
MCL57RCB	MCL57RCBP	Clear lens light only, 12V	20	
	AC	CESSORIES		
A46PB	A46PBP	Straight PL-10 plug, 6" lead	100	
A86PB	A86PBP	Straight PL-10 plug, 18" lead	100	
A55GB	A55GBP	Flush mount grommet (open back)	50	
A56GB	A56GBP	Recess mount grommet (closed back)	100	
A57GB	A57GBP	Recess mount grommet (open back)	50	
A55GK	A55GKP	Kit: A55GB and A46PB	100	
A57GK	A57GKP	Kit: A57GB and A46PB	100	
A57CB	A57CBP	Chrome trim ring	20	
BK5557GB	BK5557GBP	Cam-on mounting bracket	50	
RETAIL				
MCL57AK		Yellow kit with A55GB & A46PB, clam	12	
MCL57RK	Retail Ready	Red kit with A55GB & A46PB, clam	12	

FMVSS P2

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - 0.06A

WT/DIMS .132 lbs. / 2.5" x 2.5" x 1" Lifetime LED Warranty WARRANTY



MCL527 SERIES

FLEET Count™ 2.5" Round Sealed LED Marker/Clearance Lights

- Sonically sealed, waterproof
- Accepts standard two-pin PL-10 plug
- · Multiple mounting options available

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELI	LOW - 2 DIODES	
MCL527AB	MCL527ABP	Light only	20
MCL527AMB	MCL527AMBP	Light only, weathertight connection	20
MCL527AFB	MCL527AFBP	Flange mount	20
	RE	ED - 2 DIODES	
MCL527RB	MCL527RBP	Light only	20
MCL527RMB	MCL527RMBP	Light only, weathertight connection	20
MCL527RFB	MCL527RFBP	Flange mount	20
	A	CCESSORIES	
A46PB	A46PBP	Straight PL-10 plug, 6" lead	100
A86PB	A86PBP	Straight PL-10 plug, 18" lead	100
A55GB	A55GBP	Flush mount grommet (open back)	50
A56GB	A56GBP	Recess mount grommet (closed back)	100
A57GB	A57GBP	Recess mount grommet (open back)	50
A55GK	A55GKP	Kit: A55GB and A46PB	100
A57GK	A57GKP	Kit: A57GB and A46PB	100
A57CB	A57CBP	Chrome trim ring	20
BK5557GB	BK5557GBP	Cam-on mounting bracket	50
		RETAIL	
MCL527AK		Yellow kit with A57GB & A46PB, clam	12
MCL527AK6	Retail Ready	Yellow kit with A57GB & A46PB, clam	6
MCL527AS		Yellow light only, clam	12
MCL527RK		Red kit with A57GB & A46PB, clam	12
MCL527RK6		Red kit with A57GB & A46PB, clam	6
MCL527RS		Red light only, clam	12
FMVSS	P2		
MATERIALS	Polycarbona	te lens and housing	
VOLT/AMP	12.8VDC - 0	.034A	

Grommet Mount: .088 lbs. / 2.5" x 2.5" x 1.063"

Flange Mount: .088lbs. / 3.438" x 3.438" x .938"

Lifetime LED Warranty





WT/DIMS

WARRANTY



HOLE CUT-OUT: 2.75"

@OUTOWIE







MCL58RMFB

weathertight

connection:

MCL58APMB/RPMB



weathertight connection: MCL58AMFB/RMFB

MCL58 SERIES

2.5" Round Sealed LED Marker/Clearance Lights



- · Sonically sealed, waterproof
- Available with standard PL-10 or optional weathertight connection
- · Multiple mounting options available
- PC rated: functions as both clearance and side marker light when properly mounted on a 45 degree angle

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
YELLOW - 7 DIODES			
MCL58AB	MCL58ABP	Light only, PL-10	20
MCL58ACB	MCL58ACBP	Clear lens, yellow diodes, light only, PL-10	20
MCL58APMB	MCL58APMBP	Light only, weathertight connection	20
MCL58AMFB	MCL58AMFBP	Flange mount, weathertight connection	50
	RI	ED - 7 DIODES	
MCL58RB	MCL58RBP	Light only	20
MCL58RPMB	MCL58RPMBP	Light only, weathertight connection	20
MCL58RMFB	MCL58RMFBP	Flange mount, weathertight connection	50
	А	CCESSORIES	
A46PB	A46PBP	Straight PL-10 plug, 6" lead	100
A86PB	A86PBP	Straight PL-10 plug, 18" lead	100
AL42PB	AL42PBP	Weathertight pigtail	100
AL42PG	AL42PGP	Weathertight pigtail, .180 bullets	100
A55GB	A55GBP	Flush mount grommet (open back)	50
A56GB	A56GBP	Recess mount grommet (closed back)	100
A57GB	A57GBP	Recess mount grommet (open back)	50
A55GK	A55GKP	Kit: A55GB and A46PB	100
A57GK	A57GKP	Kit: A57GB and A46PB	100
A57CB	A57CBP	Chrome trim ring	20
BK5557GB	BK5557GBP	Cam-on mounting bracket	50

FMVSS P2 PC


MATERIALS Polycarbonate lens and housing


VOLT/AMP 12.8VDC - 0.057A

WT/DIMS Grommet Mount: .132 lbs. / 2.5" x 2.5" x 0.938"

Flange Mount: .112lbs. / 3.42" x 3.42" x 1.30"

WARRANTY Lifetime LED Warranty





MCL59 SERIES

2.5" Round Sealed LED Marker/ Clearance Lights with Reflex

- Sonically sealed, waterproof
- Accepts standard two-pin PL-10 plug
- · Multiple mounting options available
- Built-in reflex eliminates the need for a separate reflector


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELL	OW - 8 DIODES	
MCL59AB	MCL59ABP	Light only	20
MCL59A1224B	MCL59A1224B	Light only, 12/24V	20
	RE	D - 8 DIODES	
MCL59RB	MCL59RBP	Light only	20
MCL59R1224B	MCL59R1224B	Light only, 12/24V	20
	AC	CESSORIES	
A46PB	A46PBP	Straight PL-10 plug, 6" lead	100
A86PB	A86PBP	Straight PL-10 plug, 18" lead	100
A55GB	A55GBP	Flush mount grommet (open back)	50
A56GB	A56GBP	Recess mount grommet (closed back)	100
A57GB	A57GBP	Recess mount grommet (open back)	50
A55GK	A55GKP	Kit: A55GB and A46PB	100
A57GK	A57GKP	Kit: A57GB and A46PB	100
A57CB	A57CBP	Chrome trim ring	20
BK5557GB	BK5557GBP	Cam-on mounting bracket	50
FMVSS	AP2		
MATERIALS	Polycarbonate l	ens and housing	
VOLT/AMP	12.8VDC - 0.04	7A	
WT/DIMS	.088 lbs. / 2.5" x	2.5" x 1.063"	
WARRANTY	Lifetime LED W	arranty	





















MCL002AXB

MCL002 SERIES

2.5" Recess Flange Mount LED Marker/ Clearance Lights with Locking Clip

- Sonically sealed, waterproof
- Recess flange mount design fits 2.75" diameter hole cut-out
- Locking clip for PL-10 style plugs secures connection against road vibration
- Built-in reflex eliminates the need for a separate reflector
- Available in bulk and polypack packaging

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELLO	W - 1 DIODE	
MCL002AXB	MCL002AXBP	Reflex flange, locking clip	50
	RED	- 1 DIODE	
MCL002RXB	MCL002RXBP	Reflex flange, locking clip	50







FMVSS A P2


MATERIALS Polycarbonate lens and housing


VOLT/AMP 12.8VDC - 0.45A

WT/DIMS .112 lbs / 3.52" x 3.52" x 1.56"
WARRANTY Lifetime LED Warranty









AL91 SERIES

Mini Thinline Sealed LED Marker/Clearance Lights



- Standard models accept standard 1- or 2-wire plugs
- · Hard wired design available in 1- and 2-wire models
- Single wire design grounds through mounting hardware
- Two-wire design includes both lead and ground wire for mounting to all surfaces
- PC rated light functions as both clearance and side marker light when properly mounted on a 45 degree angle











AL91RB

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YEI	LLOW - 3 DIODES	
AL91AB	AL91ABP	PC rated	50
AL91CAB	AL91CABP	PC rated, clear lens	50
AL91A1224B	AL91A1224BP	PC rated, 12-24V	50
MCL91AB	MCL91ABP	Kit: AL91AB, A91CB & A91LW	50
AL82AB	AL82ABP	PC rated, hard wired, 2-wire	50
MCL96AB	MCL96ABP	P2 rated kit, hard wired, 1-wire, A91BB base	50
	F	RED - 3 DIODES	
AL91RB	AL91RBP	PC rated	50
MCL91RB	MCL91RBP	Kit: AL91RB, A91CB & A91LW	50
AL82RB	AL82RBP	PC rated, hard wired, 2-wire	50
MCL96RB	MCL96RBP	P2 rated kit, hard wired, 1-wire, A91BB base	50
	1	ACCESSORIES	
A46PB	A46PBP	2-wire PL-10 plug, 6" lead	100
A86PB	A86PBP	2-wire PL-10 plug, 18" lead	100
A90CB	A90CBP	Chrome snap-on cover	50
A91LW	A91LWP	1-wire plug, 12" lead	100
A91BB	A91BBP	Black base, self grounding	100
A91BOB	A91BOBP	Black base, open back	100
A91CB	A91CBP	Chrome base, self grounding	100
A910B	A91OBP	Chrome base, open back	100
A91GB	A91GBP	Grommet	100
		RETAIL	
MCL91AK		Yellow P2 kit with A91CB & A91LW, clam	12
MCL90AS		Yellow P2 light only, clam	12
MCL91RK	Retail Ready	Red P2 kit with A91CB & A91LW, clam	12
MCL90RS		Red P2 light only, clam	12















AL90AB






AL90RB



AL90RCB



AL90 SERIES

FLEET Count™ Mini Thinline Sealed **LED Marker/Clearance Light**

- Sonically sealed, waterproof
- Accept standard 1- or 2-wire plugs
- Single wire design grounds through mounting hardware
- Two-wire design includes both lead and ground wire for mounting to all surfaces

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
YELLOW - 1 DIODE				
AL90AB	AL90ABP	Light only	50	
		RED - 1 DIODE		
AL90RB	AL90RBP	Light only	50	
AL90RCB	AL90RCBP	Clear lens, red, light only	??	
		ACCESSORIES		
A46PB	A46PBP	2-wire PL-10 plug, 6" lead	100	
A86PB	A86PBP	2-wire PL-10 plug, 18" lead	100	
A90CB	A90CBP	Chrome snap-on cover	50	
A91LW	A91LWP	1-wire plug, 12" lead	100	
A91BB	A91BBP	Black base, self grounding	100	
A91BOB	A91BOBP	Black base, open back	100	
A91CB	A91CBP	Chrome base, self grounding	100	
A91OB	A91OBP	Chrome base, open back	100	
A91GB	A91GBP	Grommet	100	
		RETAIL		
AL90AK		Yellow kit with A91BB & A91LW, clam	12	
AL90AS	Retail Ready	Yellow light only, clam	12	
AL90RK		Red kit with A91BB & A91LW, clam	12	
AL90RS		Red light only, clam	12	

FMVSS	P
-------	---

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - 0.023A

.044 lbs. / 2.5" x 1.25" x 1" WT/DIMS Lifetime LED Warranty WARRANTY



MCL165 SERIES

GloLight® Thinline Sealed LED Marker/Clearance Lights

PATENTED TECHNOLOGY

- · Sonically sealed, waterproof
- Accept standard 1- or 2-wire plugs
- Single wire design grounds through mounting hardware
- Two-wire design includes both lead and ground wire for mounting to all surfaces


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELL	OW - 10 DIODES	
MCL165AB	MCL165ABP	Light only	20
	RE	D - 10 DIODES	
MCL165RB	MCL165RBP	Light only	20
	A	CCESSORIES	
A65B	A65BP	Black bracket	50
A65P	A65PP	Single wire plug, .156 male bullet	50
A65PB	A65PBP	Kit: A65B black bracket & A65P plug	50
A66PB	A66PBP	Kit: Gray bracket & A65P plug	50
A67CB	A67CBP	Kit: Chrome bracket & A65P plug	50
A68PB	A68PBP	Kit: Black bracket & 2-wire plug	50
		n mounting and wiring accessories, es section at back of catalog.	

FMVSS P2

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - 0.09A

WT/DIMS .066 lbs. / 3.875" x 1.25" x 1"
WARRANTY Lifetime LED Warranty









MCL165AB




MCL165RB









MCL65AB



MCL65RB



MCL75AB



MCL75RB



MCL77AB



MCL77RB

MCL65 SERIES

Thinline Sealed LED Marker/Clearance Lights

- Sonically sealed, waterproof
- Accept standard 1- or 2-wire plugs
- Single wire design grounds through mounting hardware
- Two-wire design includes both lead and ground wire for mounting to all surfaces

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		YELLOW	
MCL65AB	MCL65ABP	12V, 3 diodes	20
MCL65A24B	MCL65A24BP	24V, 3 diodes	20
MCL65CAB	MCL65CABP	12V, 3 diodes, clear lens	20
MCL65AKB	MCL65AKBP	12V, 3 diodes, kit with A67CB1, A68P	20
MCL67AB	MCL67ABP	12V, 3 diodes, kit with A65PB	20
MCL75AB	MCL75ABP	12V, 4 diodes	20
MCL77AB	MCL77ABP	12V, 4 diodes, kit with A65PB	20
		RED	
MCL65RB	MCL65RBP	12V, 3 diodes	20
MCL65R24B	MCL65R24BP	24V, 3 diodes	20
MCL65CRB	MCL65CRBP	12V, 3 diodes, clear lens	20
MCL65RKB	MCL65RKBP	12V, 3 diodes, kit with A67CB1, A68P	20
MCL67RB	MCL67RBP	12V, 3 diodes, kit with A65PB	20
MCL75RB	MCL75RBP	12V, 4 diodes	20
MCL77RB	MCL77RBP	12V, 4 diodes, kit with A65PB	20
	A	CCESSORIES	
A65B	A65BP	Black bracket	50
A65P	A65PP	Single wire plug, .156 male bullet	50
A68P	A68PP	Two wire plug, 6" lead	
A65PB	A65PBP	Kit: A65B black bracket & A65P plug	50
A66PB	A66PBP	Kit: Gray bracket & A65P plug	50
A67CB	A67CBP	Kit: Chrome bracket & A65P plug	50
A68PB	A68PBP	Kit: Black bracket & 2-wire plug	50
F	or more details or	n mounting and wiring accessories,	


see Accessories section at back of catalog.


FMVSS

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - 0.048A

WT/DIMS .066 lbs. / 3.938" x 1.25" x 1.25" WARRANTY Lifetime LED Warranty






MCL61 SERIES

FLEET Count™ Thinline Sealed LED Marker/Clearance Lights

- Sonically sealed, waterproof
- Accept standard 1- or 2-wire plugs
- Single wire design grounds through mounting hardware
- Two-wire design includes both lead and ground wire for mounting to all surfaces

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YEL	LOW - 2 DIODES	
MCL61AB	MCL61ABP	Light only	20
	RI	ED - 2 DIODES	
MCL61RB	MCL61RBP	Light only	20
	Α	CCESSORIES	
A65B	A65BP	Black bracket	50
A65P	A65PP	Single wire plug, .156 male bullet	50
A68P	A68PP	Two wire plug, 6" lead	
A65PB	A65PBP	Kit: A65B black bracket & A65P plug	50
A66PB	A66PBP	Kit: Gray bracket & A65P plug	50
A67CB	A67CBP	Kit: Chrome bracket & A65P plug	50
A68PB	A68PBP	Kit: Black bracket & 2-wire plug	50
F		mounting and wiring accessories,	
	see Accessori	es section at back of catalog.	
		RETAIL	
MCL61AK	Retail Ready	Yellow kit with A65PB, clam	12
MCL61RK		Red kit with A65PB, clam	12
MCL61AS		Yellow light only, clam	12
MCL61RS		Red light only, clam	12
FMVSS	P2		
MATERIALS	Polycarbonate le	ens and housing	
VOLT/AMP	12.8VDC - 0.051	1A	
WT/DIMS	.066 lbs. / 4" x 1	.25" x 1"	






MCL61AB





MCL61RB





Lifetime LED Warranty

WARRANTY









MCL63AB

MCL63CAB








MCL63CRB





MCL63RB



MCL63 SERIES

Miro-Flex™ Thinline Sealed LED Marker/Clearance Lights

- Sonically sealed, waterproof
- Accept standard 1- or 2-wire plugs
- Single wire design grounds through mounting hardware
- Two-wire design includes both lead and ground wire for mounting to all surfaces

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELI	LOW - 4 DIODES	
MCL63AB	MCL63ABP	Light only	20
MCL63CAB	MCL63CABP	Light only, clear lens	20
	RE	ED - 4 DIODES	
MCL63RB	MCL63RBP	Light only	20
MCL63CRB	MCL63CRBP	Light only, clear lens	20
	A	CCESSORIES	
A65B	A65BP	Black bracket	50
A65P	A65PP	Single wire plug, .156 male bullet	50
A68P	A68PP	Two wire plug, 6" lead	
A65PB	A65PBP	Kit: A65B black bracket & A65P plug	50
A66PB	A66PBP	Kit: Gray bracket & A65P plug	50
A67CB	A67CBP	Kit: Chrome bracket & A65P plug	50
A68PB	A68PBP	Kit: Black bracket & 2-wire plug	50
For more details on mounting and wiring accessories, see Accessories section at back of catalog.			

FMVSS P2

MATERIALS Polycarbonate lens and housing

 VOLT/AMP
 12.8VDC - 0.051A

 WT/DIMS
 .066 lbs. / 4" x 1.25" x 1"

 WARRANTY
 Lifetime LED Warranty

MCL61/65 SERIES

Thinline Sealed LED Fender Lights

- Sonically sealed, waterproof
- Accept standard 1- or 2-wire plugs
- Single wire design grounds through mounting hardware
- Two-wire design includes both lead and ground wire for mounting to all surfaces

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
D	UAL RED/YEL	LOW - 10 DIODES	
MCL65ARB	MCL65ARBP	Light only	20
MCL65CARB	MCL65CARBP	Light only, clear lens	20
MCL67ARB	MCL67ARBP	Kit with A65PB bracket & plug	20
D	UAL RED/YEL	LOW - 2 DIODES	
MCL61ARB	MCL61ARBP	Light only	20
MCL61AR26BK	MCL61AR26BKP	Kit with A67BB black base & 26" power wire with .150 male bullet	20
	ACC	ESSORIES	
A67BB	A67BBP	Black fender bracket	50
A67GB	A67GBP	Gray fender bracket	50
A67CVB	A67CVBP	Curved fender bracket, gray	50
A65B	A65BP	Black bracket	50
A65P	A65PP	Single wire plug, .156 male bullet	50
A68P	A68PP	Two wire plug, 6" lead	50
A65PB	A65PBP	Kit: A65B black bracket & A65P plug	50
A66PB	A66PBP	Kit: Gray bracket & A65P plug	50
A67CB	A67CBP	Kit: Chrome bracket & A65P plug	50
A68PB	A68PBP	Kit: Black bracket & 2-wire plug	50
For		ounting and wiring accessories, section at back of catalog.	


P2 **FMVSS**


MATERIALS Polycarbonate lens and housing

12.8VDC - 0.048A **VOLT/AMP**

WT/DIMS .066 lbs. / 3.875" x 1.25" x 0.875"

WARRANTY Lifetime LED Warranty












MCL65ARB



MCL65CARB





MCL61ARB













MCL99AB





MCL99RB





MCL99AC1B





MCL99RC1B


MCL99 SERIES

Mini Sealed LED Horizontal-Vertical Marker/Clearance Lights

- Sealed, waterproof design
- Surface mount installation at either horizontal or vertical
- Single wire design grounds through mounting hardware
- Two-wire design includes both lead and ground wire for mounting to all surfaces

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELLO	DW - 1 DIODE	
MCL99AB	MCL99ABP	2-wire	20
MCL99AC1B	MCL99AC1BP	Clear lens, single wire, self-grounding	50
	RED	- 1 DIODE	
MCL99RB	MCL99RBP	2-wire	20
MCL99RC1B	MCL99RC1BP	Clear lens, single wire, self-grounding	50


FMVSS	P2
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC06A
WT/DIMS	.088 lbs. / 2.5" x 1.125" x 0.625"
WARRANTY	Lifetime LED Warranty



MCL13 SERIES

Mini Sealed LED Surface Mount Marker/Clearance Lights

- Sonically sealed, waterproof
- Single wire design grounds through mounting hardware
- Two-wire design includes both lead and ground wire for mounting to all surfaces

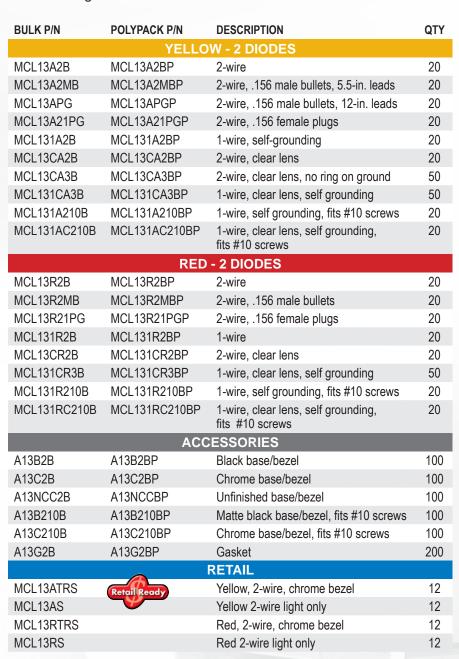





MCL13A2B




MCL13CA2B



MCL13CR2B



MCL13R2B





P2 P3 (except UCL13)

Lifetime LED Warranty

12.8VDC - 0.046A

Polycarbonate lens and housing

.088 lbs. / 2.5" x 1.063" x 0.688"

FMVSS

MATERIALS

VOLT/AMP

WARRANTY

WT/DIMS







MCL14AB



MCL14RB




MCL14CABF



MCL14CRBF



MCL14 clear lens, unlit



MCL14 SERIES

Mini Sealed LED Horizontal-Vertical Marker/Clearance Lights PC Rated

- Sonically sealed, waterproof
- Surface mount installation at either horizontal or vertical
- Single wire design grounds through mounting hardware
- Two-wire design includes both lead and ground wire for mounting to all surfaces
- · Available in red, yellow, and clear lens


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELL	OW - 3 DIODES	
MCL14AB	MCL14ABP	2-wire	20
MCL14ABF	MCL14ABFP	2-wire, female PL-10 plug	20
MCL14AGB	MCL14AGBP	1-wire, self grounding, 6-in. lead	20
MCL14A12GB	MCL14A12GBP	1-wire, self grounding, 12-in. lead	20
MCL14AGPB	MCL14AGPBP	1-wire, .180 male bullet	20
MCL14CABF	MCL14CABFP	Clear lens, 2-wire, .156 female barrels	20
MCL14CAGB	MCL14CAGBP	Clear lens, 1-wire, self grounding	20
	RE	D - 3 DIODES	
MCL14RB	MCL14RBP	2-wire	20
MCL14R2B	MCL14R2BP	2-wire, .180 male bullets	20
MCL14RBF	MCL14RBFP	2-wire, female plug	20
MCL14RGB	MCL14RGBP	1-wire, self grounding	20
MCL14RPG	MCL14RPGP	2-wire, .156 male bullets, 12-in. leads	20
MCL14CRGB	MCL14CRGBP	Clear lens, 1-wire, self grounding	20
MCL14CRBF	MCL14CRBFP	Clear lens, 2-wire, .156 female barrels	20
	AC	CESSORIES	
A13C2B	A13C2BP	Chrome base/bezel	100
A13B2B	A13B2BP	Black base/bezel	100
A13G2B	A13G2BP	Gasket	200
FMVSS	P2 PC		
MATERIALS	ALS Polycarbonate lens and housing		
VOLT/AMP	12.8VDC - 0.06A		
WT/DIMS	.088 lbs. / 2.5" x	1.125" x 0.625"	
WARRANTY	Lifetime LED Wa	rranty	



A13C2B

MCL15 SERIES

Surface Mount LED Marker/Clearance Lights



- Surface mount installation
- Hard wired, includes both lead and ground wire with molded .180 male bullets
- · Chrome finish ABS trim ring included with kits

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELLO	W - 2 DIODES	
MCL15APG	MCL15APGP	Light only, .180 male bullets	20
MCL15AKPG	MCL15AKPGP	Kit: MCL15APG, chrome trim ring	20
	RED	- 2 DIODES	
MCL15RPG	MCL15RPGP	Light only, .180 male bullets	20
MCL15RKPG	MCL15RKPGP	Kit: MCL15RPG, chrome trim ring	20
	ACC	ESSORIES	
A15CB	A15CBP	Chrome base/bezel	100
A15GB	A15GBP	Gasket	50
A15CGB	A15CGBP	Chrome base/bezel and gasket	100

EMM/CC	D0
FMVSS	P2

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - 0.047A

WT/DIMS Light: .088 lbs. / 2.625" x 1.375" x .563"

Kit: .092 lbs. / 3.938" x 1.344" x .688"

WARRANTY Lifetime LED Warranty





MCL15APG




MCL15AKPG




MCL15RPG



MCL15RKPG















MCL299AB





MCL299RB

MCL299 SERIES

Sealed LED Marker/Clearance Light

Sonically sealed, waterproof




Adhesive mount

Hard wired, includes separate ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELLO	DW - 1 DIODE	
MCL299AB	MCL299ABP	Light only	50
MCL290APG	MCL290APGP	Light, .180 male bullets	50
	RED) - 1 DIODE	
MCL299RB	MCL299RBP	Light only	50
MCL290RPG	MCL290RPGP	Light, .180 male bullets	50

FMVSS	PC
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	Yellow: 12.8VDC - 0.12A
	Red: 12.8V - 0.065A
WT/DIMS	.03 lbs. / 1.50" x .625" x .75"
WARRANTY	Lifetime LED Warranty





MCL17/19 SERIES Miro-Flex™ Surface Mount Sealed **LED Marker/Clearance Lights**

- Sonically sealed, waterproof
- Two-wire design includes both lead and ground wire for mounting to all surfaces
- Snap-on chrome trim ring included
- Available in 3-LED 4" model and 4-LED 6" model

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
		YELLOW			
MCL17AB	MCL17ABP	3-LED	20		
MCL17ABB	MCL17ABBP	3-LED, black trim ring	20		
MCL17CAB	MCL17CABP	3-LED, clear lens	20		
MCL19AB	MCL19ABP	4-LED	20		
MCL19CAB	MCL19CABP	4-LED, clear lens	20		
		RED			
MCL17RB	MCL17RBP	3-LED	20		
MCL17RBB	MCL17RBBP	3-LED, black trim ring	20		
MCL17CRB	MCL17CRBP	3-LED, clear lens	20		
MCL19RB	MCL19RBP	4-LED	20		
MCL19CRB	MCL19CRBP	4-LED, clear lens	20		
ACCESSORIES					
A17GB	A17GBP	Black gasket for 3-LED models	100		
A19CB	A19CBP	Chrome bezel	50		

P2		
Polycarbonate lens and housing		
MCL17:	12.8VDC - 0.047A	
MCL19:	12.8VDC - 0.051A	
MCL17:	.088 lbs. / 4.188" x 1.375" x .75"	
MCL19:	.132 lbs. / 5.75" x 1.563" x .75"	
Lifetime LED Warranty		
	Polycarbo MCL17: MCL19: MCL17: MCL19:	















MCL19AB



MCL19CAB/CRB



MCL19RB














MCL0030ABB





MCL0030RBB





MCL0030 SERIES

Surface Mount LED Marker/Clearance Lights with Reflex

- Ultrathin design only 3/8" thick
- Surface mount on 2.7" centers
- Snap-on lens with reflex eliminates the need for a separate reflector
- Hard wired

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELL	OW - 1 DIODE	
MCL0030ABB	MCL0030ABBP	Hard wired	20
	RE	D - 1 DIODE	
MCL0030RBB	MCL0030RBBP	Hard wired	20
ACCESSORIES			
A0028CRB	A0028CRBP	Chrome snap-on bezel	50

FMVSS AP2

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - 0.073A


WT/DIMS .08 lbs. / 3.77" x 1.79" x .36" WARRANTY Lifetime LED Warranty

MCL0039 SERIES


2.5" Round LED Marker/Clearance Lights with Reflex

- · Surface mount black base
- Snap-on lens with reflex eliminates the need for a separate reflector
- Hard wired with power and ground wires

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELL	.OW - 1 DIODE	
MCL0039ABB	MCL0039ABBP	Hard wired	20
	RE	D - 1 DIODE	
MCL0039RBB	MCL0039RBBP	Hard wired	20
FMVSS	AP2		
MATERIALS	Polycarbonate lens	s and housing	
VOLT/AMP	12.8VDC - 0.073A		
WT/DIMS	.08 lbs. / 2.5" x 2.5	" x .8"	
WARRANTY	Lifetime LED Warr	anty	
















MCL31AB





MCL31RB



MCL31 SERIES

Surface Mount LED Marker/ **Clearance Lights with Reflex**

- Snap-on, replaceable lens
- Lens with reflex eliminates need for separate reflector
- Two-wire design includes both lead and ground wire for mounting to all surfaces

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	YELLOW - 6 DIODES			
MCL31AB	MCL31ABP	Light only, white base	20	
RED - 6 DIODES				
MCL31RB	MCL31RBP	Light only, white base	20	
MCL31RPG	MCL31RPGP	Light only, white base, .180 male bullets	20	

FMVSS	AP2
MATERIALS	Acrylic lens, ABS housing
VOLT/AMP	12.8VDC - 0.040A
WT/DIMS	.132 lbs. / 4" x 2.063" x 1"
WARRANTY	Lifetime LED Warranty



MCL32 SERIES

Surface Mount LED Marker/ Clearance Lights with Reflex

- Snap-on, replaceable lens
- Lens with reflex eliminates need for separate reflector
- Two-wire design includes both lead and ground wire for mounting to all surfaces

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELI	LOW - 3 DIODES	
MCL32AB	MCL32ABP	Light only, white base	100
MCL32ATB	MCL32ATBP	Supplemental turn, white base	50
MCL32ABB	MCL32ABBP	Light only, black base	100
	RE	ED - 3 DIODES	
MCL32RB	MCL32RBP	Light only, white base	100
MCL32RBB	MCL32RBBP	Light only, black base	100
	A	CCESSORIES	
A32AB	A32ABP	Yellow replacement lens	10
A32RB	A32RBP	Red replacement lens	50
		RETAIL	
MCL32ABS		Yellow light with black base	12
MCL32RBS	Retail Ready	Red light with black base	12
MCL32AS		Yellow light with white base	12
MCL32RS		Red light with white base	12

FMVSS A

MATERIALS Acrylic lens, ABS housing

 VOLT/AMP
 12.8VDC - 0.6A

 WT/DIMS
 .132 lbs. / 4" x 2" x 1"

 WARRANTY
 Lifetime LED Warranty









MCL32AB





MCL32ABB





MCL32RB





MCL32RBB











MCL0032ABB





MCL0032RBB



MCL0032 SERIES

Surface Mount LED Marker/ Clearance Lights with Reflex

- Snap-on, replaceable lens
- Surface mount base, mounts on 3" centers
- Lens with reflex eliminates need for separate reflector
- Two-wire design includes both lead and ground wire for mounting to all surfaces

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELI	LOW - 1 DIODE	
MCL0032ABB	MCL0032ABBP	Light only, black base	100
	RE	ED - 1 DIODE	
MCL0032RBB	MCL0032RBBP	Light only, black base	100
	AC	CESSORIES	
A32AB	A32ABP	Yellow replacement lens	50
A32RB	A32RBP	Red replacement lens	50
RETAIL			
MCL0032ABS		Yellow light with black base, clam	12
MCL0032RBS	Retail Ready	Red light with black base, clam	12

FMVSS AP2

MATERIALS Acrylic lens, ABS housing

12.8VDC - 0.6A **VOLT/AMP** .132 lbs. / 4" x 2" x 1" WT/DIMS WARRANTY Lifetime LED Warranty

MCL35AEB

Surface Mount LED Marker/ Clearance Light with Reflex

- Surface ear mount black base, mounts on 3.25" centers
- Lens with reflex eliminates need for separate reflector
- Single wire design grounds through mounting hardware


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YEL	LOW - 3 DIODES	
MCL35AEB	MCL35AEBP	Light only	50
FMVSS	AP2		
MATERIALS	Acrylic lens, ABS	S housing	
VOLT/AMP	12.8VDC - 0.07A	4	
WT/DIMS	.132 lb / 3.75" x	2.03" x .96"	
WARRANTY	Lifetime LED Wa	arranty	







MCL35AEB



MCL35A32G

Surface Mount LED Marker/ Clearance Light with Reflex

- Surface mount black base, mounts on 3-5/16" centers
- Lens with reflex eliminates need for separate reflector
- Self grounding; 32" power wire with .180 male bullet

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YEL	LOW - 6 DIODES	
MCL35A32G	MCL35A32GP	Light, 32" lead with .180 male bullet	50

FMVSS A P2


MATERIALS Acrylic lens, ABS housing VOLT/AMP 12.8VDC - 0.165A

WT/DIMS .110 lbs. / 3.875" x 2.375" x 0.938"

WARRANTY Lifetime LED Warranty


















MCL36AB





MCL36RB

MCL36 SERIES

Stud Mount LED Marker/ Clearance Light with Reflex

- Stud mount black base; two-wire design
- Lens with reflex eliminates need for separate reflector


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YEL	LOW - 6 DIODES	
MCL36AB	MCL36ABP	Hard wired	20
RED - 6 DIODES			
MCL36RB	MCL36RBP	Hard wired	20
RETAIL			
MCL36AS		Yellow light with hardware, clam	12
MCL36AS6	Retail Ready	Yellow light with hardware, clam	6

AP2 **FMVSS**

Acrylic lens, ABS housing MATERIALS 12.8VDC - 0.054A **VOLT/AMP**

WT/DIMS .110 lbs. / 2.875" x 2.125" x .938"

WARRANTY Lifetime LED Warranty



MCL40/44 SERIES

Surface Mount LED Marker/ Clearance Lights with Reflex

- Select from 2-LED and 6-LED models in yellow and red
- Snap-on, replaceable lens
- Surface mount white base, mounts on 3" centers
- Lens with reflex eliminates need for separate reflector
- Single wire and two-wire designs available

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		YELLOW	
MCL40AB	MCL40ABP	2-LED, 2-wire, power and ground	20
MCL40APB	MCL40APBP	2-LED, 2-wire .180 male bullets	20
MCL44AB	MCL44ABP	6-LED, 2-wire, power and ground	20
MCL44AB1	MCL44AB1P	6-LED, 1-wire, self grounding	20
	RED		
MCL40RB	MCL40RBP	2-LED, 2-wire, power and ground	20
MCL44RB	MCL44RBP	6-LED, 2-wire, power and ground	20
MCL44RB1	MCL44RB1P	6-LED, 1-wire, self grounding	20
	Д	CCESSORIES	
A44AB	A44ABP	Yellow replacement lens	10
A44RB	A44RBP	Red replacement lens	10
RETAIL			
MCL40AS	Retail Ready	Yellow 2-LED, 2-wire, clam	12
MCL40RS	Merch and y	Red 2-LED, 2-wire, clam	12

FMVSS	P2 A
MATERIALS	Acrylic lens, ABS housing
VOLT/AMP	12.8VDC - 2-LED 0.040A; 6-LED .054A
WT/DIMS	.088 lbs. / 4" x 1.5" x 0.938"
WARRANTY	Lifetime LED Warranty










MCL40AB





MCL40RB







C Rated








MCL45/46AB






MCL45/46RB



MCL45/46 SERIES

LED Double Bullseye Style Marker/Clearance Lights

Snap-on, replaceable lens



Single wire and two-wire designs available

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELL	OW - 10 DIODES	
MCL45AB	MCL45ABP	1-wire, self grounding	20
MCL46AB	MCL46ABP	2-wire, power and ground	20
	RED - 10 DIODES		
MCL45RB	MCL45RBP	1-wire, self grounding	20
MCL46RB	MCL46RBP	2-wire, power and ground	20
	A	CCESSORIES	
AL46AB	AL46ABP	Yellow replacement lens	50
AL46RB	AL46RBP	Red replacement lens	50
		RETAIL	
MCL45AS	Retail Ready	Yellow 1-wire, clam	12
MCL45RS	Kerdil Keddy	Red 1-wire, clam	12

FMVSS P2 PC

MATERIALS Acrylic lens, ABS housing VOLT/AMP 12.8VDC - 0.087A

WT/DIMS .088 lbs. / 4.063" x 2.125" x 1.125"

WARRANTY Lifetime LED Warranty

MCL49 SERIES

Surface Mount Sealed LED Marker/Clearance Light

- Sonically sealed, waterproof
- Surface mount, mounts on 3" centers
- · Includes both lead and gound

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YEL	LOW - 14 DIODES	
MCL49AB	MCL49ABP	Light only	20
	RI	ED - 14 DIODES	
MCL49RB	MCL49RBP	Light only	20

PC Rated

FMVSS	P2 PC	
MATERIALS	Polycarbonate lens and housing	
VOLT/AMP	12.8VDC - 0.87A	
WT/DIMS	.132 lbs. / 3.875" x 2" x 1"	
WARRANTY	Lifetime LED Warranty	








MCL49AB





MCL49RB










MCL48AB






MCL48CAB









MCL73AB



MCL73RB

MCL48 SERIES

LED Intermediate Side Marker Light with Supplemental Mid-Ship Turn

- Sonically sealed, waterproof
- Surface mount, mounts on 4-13/16" centers
- Includes both lead and ground wires

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELL	OW - 16 DIODES	
MCL48AB	MCL48ABP	Light	20
MCL48CAB	MCL48CABP	Light, clear lens	20
MCL48AKB	MCL48AKBP	Kit: Light and A48CB	20
	A	CCESSORIES	
A48CB	A48CBP	Chrome bezel	50
FMVSS	P2		
MATERIALS	Polycarbonate lens and housing		
VOLT/AMP	12.8VDC - Side marker .074A; Turn signal .248A		
WT/DIMS	.221 lbs. / 6" x 2	.25" x 1.375"	
WARRANTY	Lifetime LED Warranty		

MCL73 SERIES

LED Surface Mount Marker/Clearance Lights



- Sonically sealed, waterproof
- Surface mount, mounts on 4-13/16" centers
- Includes both lead and ground wires

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELL	OW - 16 DIODES	
MCL73AB	MCL73ABP	Light	20
	RE	D - 16 DIODES	
MCL73RB	MCL73RBP	Light	20
	Α	CCESSORIES	
A48CB	A48CBP	Chrome bezel	50
FMVSS	P2 PC		
MATERIALS	Polycarbonate le	ens and housing	
VOLT/AMP	VOLT/AMP 12.8VDC248A		
WT/DIMS	.221 lbs. / 6" x 2	.25" x 1.375"	
WARRANTY	Lifetime LED Wa	arranty	

MCL66 SERIES

Sealed LED Surface Mount Marker/Clearance Lights

- · Sonically sealed, waterproof
- Surface mount, mounts on 3" centers
- Includes both lead and ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YEL	LOW - 6 DIODES	
MCL66AB	MCL66ABP	12V	20
MCL66APG	MCL66APGP	12V, .180 male bullets	20
MCL66A24B	MCL66A24BP	12-24V	20
MCL66CAB	MCL66CABP	12V, clear lens	20
	RE	ED - 6 DIODES	
MCL66RB	MCL66RBP	12V	20
MCL66RPG	MCL66RPGP	12V, .180 male bullets	20
MCL66R24B	MCL66R24BP	12-24V	20
MCL66CRB	MCL66CRBP	12V, clear lens	20
	Α	CCESSORIES	
A66GB	A66GBP	Gasket, black	100
BK66DB	BK66DBP	Heavy duty armored base, die cast metal	50
BK66D1B	BK66D1BP	Heavy duty armored base, metal, black finish, open design	50
		RETAIL	
MCL66AS	Retail Ready	Yellow 6-LED, 12V, clam	12
MCL66RS		Red 6-LED, 12V, clam	12

FMVSS	P2
LINI A 22	P/

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - 0.057A

WT/DIMS .088 lbs. / 4" x .875" x 1.188"
WARRANTY Lifetime LED Warranty





MCL66AB




MCL66RB



MCL66CAB



MCL66CRB












MCL71RB



MCL71 SERIES

Low Profile LED Marker/ Clearance Light

- Chrome plated housing, replaceable lens
- Includes both lead and ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	RED - 2 DIODES		
MCL71RB	MCL71RBP	Flush mount marker light	20
FMVSS	P2		
MATERIALS	Acrylic lens, chrome plated ABS bezel		
VOLT/AMP	12.8VDC - 0.054A		
WT/DIMS	.088 lbs. / 3.75" x 2.25" x 1/2"		
WARRANTY	VARRANTY Lifetime LED Warranty		



MCL76 SERIES

Sealed LED Surface Mount Marker/ Clearance Lights with Reflex




MCL76AB

- · Sonically sealed, waterproof
- Surface mount, mounts on 4-13/16" centers
- · Lens with reflex eliminates need for a separate reflector
- Includes weathertight pigtail with both lead and ground wire



MCL76RB



POLYPACK P/N	DESCRIPTION	QTY
YEL	LOW - 4 DIODES	
MCL76ABP	Light with reflex	20
RI	ED - 4 DIODES	
MCL76RBP	Light with reflex	20
	RETAIL	
	Yellow light, clam	6
Retail Ready	Red light, clam	6
	YEL MCL76ABP RI	YELLOW - 4 DIODES MCL76ABP Light with reflex RED - 4 DIODES MCL76RBP Light with reflex RETAIL Yellow light, clam

FMVSS	A P2
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 0.063A
WT/DIMS	.132 lbs. / 5.813" x 2" x 1.188"
WARRANTY	Lifetime LED Warranty

MCL82 SERIES

Flush Mount LED Marker/Clearance Lights with Reflex

- · Sonically sealed, waterproof
- · Low profile, flush mount design
- · Lens with reflex eliminates need for a separate reflector
- Hard wired, includes lead and ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YEL	LOW - 3 DIODES	
MCL82AB	MCL82ABP	Light only, 2-wire	50
	R	ED - 3 DIODES	
MCL82RB	MCL82RBP	Light only, 2-wire	50

FMVSS	AP2
FINI V O O	AFZ

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - 0.05A

WT/DIMS .09 lbs / 4.50" x 1.63" x .75"
WARRANTY Lifetime LED Warranty








MCL82AB





MCL82RB












MCL85AB



MCL85 SERIES

Sealed LED Surface Mount Marker/Clearance Lights

- Sonically sealed, waterproof
- Surface mount, mounts on 2-3/4" centers
- Single wire design grounds through mounting hardware

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY			
	YELLOW - 3 DIODES					
MCL85AB	MCL85ABP	Surface mount light	50			
		RETAIL				
MCL85AS	Retail Ready	Yellow light with hardware, clam	12			
MCL85RS		Red light with hardware, clam	12			
FMVSS	P2 P3					
MATERIALS	Polycarbonate le	ens and housing				
VOLT/AMP	12.8VDC - 0.066A					
WT/DIMS	.044 lbs. / 3.188" x 1.063" x 1.188"					
WARRANTY	Lifetime LED Wa	arranty				






MCL81AB



MCL81RB



MCL81 SERIES

Chrome Plated LED Marker/Clearance Lights

Chrome plated ABS housing



Includes both lead and ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELI	LOW - 6 DIODES	
MCL81AB	MCL81ABP	Light with ABS housing	20
	RE	ED - 6 DIODES	
MCL81RB	MCL81RBP	Light with ABS housing	20
FMVSS	P2 PC		
MATERIALS	Acrylic lens, chr	ome plated ABS bezel	
VOLT/AMP	12.8VDC - 0.15	3A	
WT/DIMS	.265 lbs. / 4.781	" x 2.125" x 1.375"	
WARRANTY	Lifetime LED Wa	arranty	

MCL86 SERIES

Armored Die Cast LED Marker/Clearance Lights




- Die cast steel housing, mounting gasket
- Surface mount, mounts on 3-7/8" centers
- Two-wire design with power and ground wires

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YELI	LOW - 6 DIODES	
MCL86AB	MCL86ABP	Light with steel housing	20
	RE	ED - 6 DIODES	
MCL86RB	MCL86RBP	Light with steel housing	20
FMVSS	P2 PC		
MATERIALS	Acrylic lens, stee	el housing	
VOLT/AMP	12.8VDC - 0.20A	4	
WT/DIMS	.463 lbs. / 4.5" x	2.25" x 1.5"	
WARRANTY	Lifetime LED Wa	arranty	







MCL95 SERIES

Sealed Stud Mount LED Marker/Clearance Lights

- Sonically sealed, waterproof
- Single wire design grounds through mounting hardware

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY			
	YELI	LOW - 3 DIODES				
MCL95AB	MCL95ABP	1-wire, 20" lead	50			
MCL95ABF	MCL95ABFP	2-wire, 5mm female barrels	50			
	RED - 3 DIODES					
MCL95RB	MCL95RBP	1-wire, 20" lead	50			
MCL95RBF	MCL95RBFP	2-wire, 5mm female barrels	50			
	RETAIL					
MCL95AS		Yellow, single wire, clam	12			
MCL95RS		Red, single wire, clam	12			
	Retail Ready					
FMVSS	P2 P3					

MATERIALS Polycarbonate lens and housing, plated steel stud

VOLT/AMP 12.8VDC - 0.051A

WT/DIMS .088 lbs. / 2.125" x 1.125" x 1.063"

WARRANTY Lifetime LED Warranty







MCL95AB



MCL95RB















CBL22 SERIES

Sealed LED Triangular Cab/Clearance Light



- Sonically sealed, waterproof
- Design includes lead and ground wire
- Mounting gasket included

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
YELLOW - 15 DIODES					
CBL22AB	CBL22ABP	Cab light	50		
CBL22CAB	CBL22CABP	Cab light, clear lens	50		
RED - 15 DIODES					
CBL22RB	CBL22RBP	Cab light	50		
RETAIL					
CBL22AS		Yellow cab light, clam	12		
	Retail Ready				


P2 PC **FMVSS**

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - 0.107A

WT/DIMS .176 lbs. / 3.5" x 2.75" x 1.688"

WARRANTY Lifetime LED Warranty




MCL180 SERIES

LED Fender Light Assembly

- Reversible one product can be used for either driver or passenger side of trailer
- · Sonically sealed, waterproof
- P2 rated
- Hard wired, includes separate ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
FENDER LIGHT - 2 DIODES					
MCL180ARB	MCL180ARBP	Amber/red, reversible	50		
	RETAIL				
MCL180ARFK	Retail Ready	Kit: (2) MCL180ARB, clam	2		

FMVSS	P2
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC033A
WT/DIMS	.05 lbs. / 8.50" x 1.688" x .813"
WARRANTY	Lifetime LED Warranty

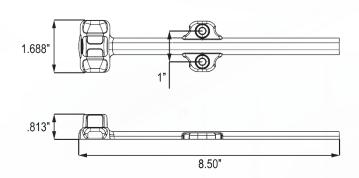











LED Fender Light Assembly




- Reversible one product can be used for both driver and passenger side of trailer
- Sonically sealed, waterproof
- Snap-on chrome-plated ABS trim ring
- Hard wired, includes separate ground wire






MCL181ARCRB

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	FENDER LIGH	<mark>T -</mark> 2 DIODES	
MCL181ARCRB	MCL181ARCRBP	Amber/red, reversible, 2-wire, 5.5-in. leads	50
MCL181ARCRL12B	MCL181ARCRL12BP	Amber/red, reversible, 2-wire, 12-in. leads	50
MCL181ARCRGB	MCL181ARCRGBP	Amber/red, reversible, single wire self-grounding, 9-in. lead	50







MCL10 SERIES

Sealed 3/4" LED Identification Lights for Over 80" Applications

- Three 3/4-inch lights with grommets and insulated wiring harness
- · Sonically sealed, waterproof
- · Design includes both lead and ground wire
- Available in bulk and polypack packaging





MCL10ACK3L12B



MCL10RCK3L12B

20

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
YELLOW ID LIGHTS - 3 DIODES				
MCL10ACK3L12B	MCL10ACK3L12BP	Clear lens (3) MCL10 lights, A12GB grommets, 29-in. molded harness	20	
RED ID LIGHTS - 3 DIODES				

Clear lens (3) MCL10 lights, A12GB

grommets, 29-in. molded harness

FMVSS P2

MATERIALS Polycarbonate lens and housing

MCL10RCK3L12B MCL10RCK3L12BP

VOLT/AMP 12.8VDC - 0.022A

WT/DIMS .25 lbs. / 0.75" x 0.75" x 0.95"
WARRANTY Lifetime LED Warranty









MCL12/22/122 SERIES

Sealed 3/4" LED Identification **Lights for Over 80" Applications**

- Sonically sealed, waterproof
- Design includes both lead and ground wire

RED ID MCL12RK3BP		HTS - 3 DIODES	
MCL12RK3BP			
		(3) red MCL12 lights, molded harness	20
MCL12RK3RN	1BP	(3) red MCL12 lights, molded harness, weathertight plug	50
MCL122RK3BF)	(3) red MCL12 lights, supplemental turn function, .180 male bullets	20
MCL22RK4BP		(3) red MCL12 lights, supplemental turn function, amp connector	20
MCL22RK5BP		(3) red MCL12 lights, supplemental turn function, amp connector, 48-in. leads	20
FMVSS	P2		
MATERIALS VOLT/AMP WT/DIMS WARRANTY	12.8\ .25 lk	VDC - 0.022A os. / 0.75" x 0.75" x 0.95"	
	MCL12RK3RM MCL122RK3BF MCL22RK4BP MCL22RK5BP FMVSS MATERIALS VOLT/AMP MT/DIMS	MCL12RK3RMBP MCL122RK3BP MCL22RK4BP MCL22RK5BP FMVSS P2 MATERIALS Polyo VOLT/AMP 12.81 WT/DIMS .25 lb	MCL12RK3RMBP (3) red MCL12 lights, molded harness, weathertight plug MCL122RK3BP (3) red MCL12 lights, supplemental turn function, .180 male bullets MCL22RK4BP (3) red MCL12 lights, supplemental turn function, amp connector MCL22RK5BP (3) red MCL12 lights, supplemental turn function, amp connector, 48-in. leads FMVSS P2 MATERIALS Polycarbonate lens and housing VOLT/AMP 12.8VDC - 0.022A MT/DIMS .25 lbs. / 0.75" x 0.75" x 0.95"



MCL922 SERIES

Sealed 3/4" LED Identification Light **Bar for Over 80" Applications**



- Three 3/4-inch lights installed in a corrosion proof ABS base
- Sonically sealed, waterproof
- Design includes both lead and ground wire

		14 15/16"		
	-	8 1/2"	-	+
0	0	0	ф	0 1 3/16"
				Ī
_				1"
				+

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	RED ID LIG	HTS - 3 DIODES	
MCL922RB	MCL922RBP	ID light bar, molded black base	10

FMVSS

MATERIALS Polycarbonate lens and housing

12.8VDC - 0.022A **VOLT/AMP**

WT/DIMS MCL922RB: .441 lb. / 14.875" x 1.25" x 1"


WARRANTY Lifetime LED Warranty

MCL98 SERIES

Sealed LED Identification Light Bar for Over 80" Applications



- Sonically sealed, waterproof
- Compact 14.25" x 1.125"
- Design includes both lead and ground wire



ИC	·LY	SKB

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
RED ID LIGHT BAR - 3 DIODES				
MCL98RB	MCL98RBP	ID light bar, 6-in. leads	10	
MCL98RBTKPG	MCL98RBTKPGP	ID light bar, .156 bullets, 48-in. leads	20	
MCL98RL60B	MCL98RL60BP	ID light bar, 60-in. leads	10	
MCL98RL601B	MCL98RL601BP	ID light bar, 60-in. power lead, 10-in. ground lead	10	
		RETAIL		
MCL98RK	Retail Ready	Light bar, slipover blister	6	


FMVSS	P2
-------	----

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - 0.020A

WT/DIMS .243 lb. / 14.25" x 1.125" x .875"

WARRANTY Lifetime LED Warranty






MCL98RK





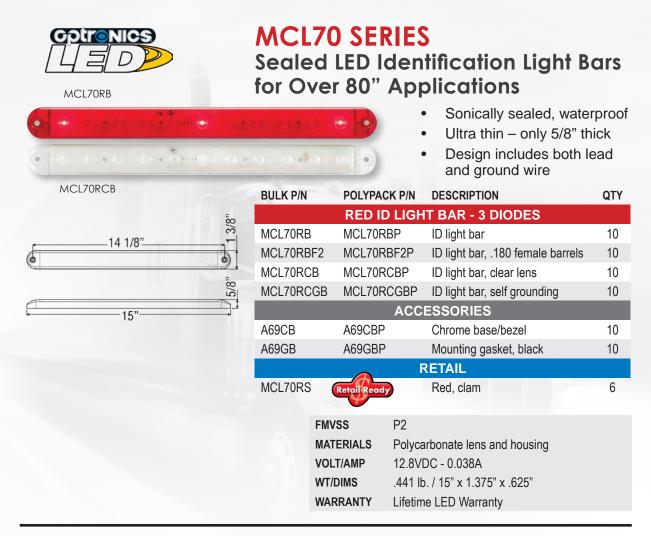



MCL78/88 SERIES

Sealed LED Identification Light Bars for Over 80" Applications



- Sonically sealed, waterproof
- Ultra thin only 1" thick
- Design includes both lead and ground wire

16 1/8"	•)1 3/8" →
17"	1"

MCI88RCB

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	RED ID LI	GHT BAR - 3 DIODES		
MCL78RB	MCL78RBP	ID light bar	10	
MCL88RCB	MCL88RCBP	ID light bar, clear lens	10	
	A	CCESSORIES		
A79CB	A79CBP	Chrome base/bezel	10	
FMVSS	P2			
MATERIALS	MATERIALS Polycarbonate lens and housing			
VOLT/AMP	VOLT/AMP 12.8VDC - 0.022A			
WT/DIMS	WT/DIMS .441 lb. / 17" x 1.375" x 1"			
WARRANTY	WARRANTY Lifetime LED Warranty			

MCL964 SERIES

Sealed LED Identification Light Bar for Over 80" Applications



- Sonically sealed, waterproof
- Low profile only 0.79" thick
- Design includes both lead and ground wire



•	19.64"	1.17"
•	20.51"	0.7

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	RED ID LIGHT	BAR - 3 DIODES	
MCL964RB	MCL964RBP	ID light bar	10
	ACCES	SSORIES	
A64CRB	A64CRBP	Chrome base/bezel	50
	B0		

FMVSS P2

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC

WT/DIMS 0.441 / 20.56" x 1.09" x 0.79" **WARRANTY** Lifetime LED Warranty

MCL83 SERIES



FLEET Count™ Sealed LED Identification Light Bar for Over 80" Applications

- Sonically sealed, waterproof lights snap onto corrosion proof polycarbonate base
- Design includes both lead and ground wire



BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	RED ID LI	GHT BAR - 3 DIODES	
MCL83RB	MCL83RBP	3-LED ID light bar	10
AL90RB	AL90RBP	1-LED replacement light	50
		RETAIL	
MCL83RK	Retail Ready	3-LED ID light bar, slipover blister	6


FMVSS	P2
LIMIAOO	ГΖ

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - .069A

WT/DIMS .397 lb. / 15.938" x 1.469" x 1.625"

WARRANTY Lifetime LED Warranty










MCL93 SERIES

Sealed LED Identification Light Bar for Over 80" Applications



- Sonically sealed, waterproof lights snap onto corrosion proof polycarbonate base
- Design includes both lead and ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
	RED ID LIGHT BAR - 9 DIODES				
MCL93RB	MCL93RBP	9-LED ID light bar	10		
MCL93RPG	MCL93RPGP	9-LED ID light bar, .180 male bullet on power, eyelet on ground	10		
AL91RB	AL91RBP	3-LED replacement light	50		
	•	RETAIL			
MCL93RK	Retail Ready	9-LED ID light bar, slipover blister	6		



FMVSS P2

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - 0.153A

WT/DIMS .397 lb. / 15.938" x 1.469" x 1.625"

WARRANTY Lifetime LED Warranty




MCL914R1PG

Sealed LED Identification Light Bar for Over 80" Applications



- Sonically sealed, waterproof
- Hard wired, with .180 female barrels

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	RED ID LIG	SHT BAR - 9 DIODES	
MCL914R1PG	MCL914R1PGP	ID light bar, black base	10



FMVSS P2

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - 0.147A

WT/DIMS .397 lb. / .287 lbs / 17.32" x 1.25" x .95"

WARRANTY Lifetime LED Warranty

MCL84 SERIES

Sealed LED Identification Light Bar for Over 80" Applications



- Sonically sealed, waterproof lights snap onto stainless steel base
- Design includes both lead and ground wire



BULK P/N	POLYPACK P/N	DESCRIPTION	QTY			
	RED ID LI	GHT BAR - 9 DIODES				
MCL84RB	MCL84RBP	9-LED ID light bar	10			
AL91RB	AL91RBP	3-LED replacement light	50			
FMVSS	P2		<u>*</u>			
MATERIALS	Polycarbonate li	ight, stainless steel housing	1 3/8"		16 1/16"—	
VOLT/AMP	12.8VDC153	A	T.		10 1/10 —	*
WT/DIMS	.397 lb. / 16.5" x	(1.375" x 1.625"	11/16"		10.1/01	1.5/8"
WARRANTY	Lifetime LED Wa	arranty	1) '	-16 1/2" 	→ ' ↑

MCL97 SERIES

Sealed LED Identification Light Bar for Over 80" Applications




- Sealed, waterproof lights on stainless steel base
- Single wire, grounds through mounting hardware



BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
RED ID LIGHT BAR - 9 DIODES				
MCL97RB	MCL97RBP	9-LED ID light bar	10	
MCL97RPG	MCL97RPGP	9-LED ID light bar, .180 male bullet	10	
		RETAIL		
MCL97RK	Retail Ready	ID light bar, slipover blister	6	

FMVSS	P2 P3
MATERIALS	Polycarbonate light, stainless steel base
VOLT/AMP	12.8VDC153A
WT/DIMS	.287 lb. / 14.25" x 1.188" x 1.313"
WARRANTY	Lifetime LED Warranty














LPL11CB





HOLE CUT-OUT: 1.25"

LPL11 SERIES

Snap-In LED Mini License Plate Light

- Chrome-plated brass construction
- Easy snap-in mounting
- Sonically sealed, waterproof
- Two-wire design includes both lead and ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	LICEN	SE LIGHT - 2 DIODES	
LPL11CB	LPL11CBP	Snap-in, license light	50
LPL11CPG	LPL11CPGP	Snap-in, license light, .180 male bullets	50
FMVSS	(2) L		
MATERIALS	Polycarbor	nate lens and brass housing	
VOLT/AMP	12.8VDC -	.0306A	
WT/DIMS	.068lbs. / 1	l.5" x 1.5" x 1.125"	
WARRANTY	Lifetime LE	ED Warranty	



LPL12 SERIES

3/4" Sealed LED License Light



- Sealed, waterproof
- Meets SAE J587 when properly mounted using brackets listed below
- · Design includes both lead and ground wire



BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
LICENSE LIGHT - 2 DIODES				
LPL12CB	LPL12CBP	Light with .180 female barrels	20	
LPL12CPGB	LPL12CPGBP	Light with .180 male bullets	20	
LPL12CKM2B	LPL12CKM2BP	Kit: LPL12CPGB, A12B2LPB surface mount bracket, A12GLPB grommet	50	
LPL12CKMB	LPL12CKMBP	Kit: LPL12CPGB with A11BLPB bracket	20	
LPL12CKF2B	LPL12CKF2BP	Kit: LPL12CB, A12B2LPB surface mount bracket, A12GLPB grommet	50	
		ACCESSORIES		
A11BLPB	A11BLPBP	Black flush mount bracket	50	
A11GLPB	A11GLPBP	Gray flush mount bracket	50	
A12B2LPB	A12B2LPBP	Black vertical mount bracket	50	
A12GLPB	A12GLPBP	Grommet for A12B2LPB	50	



Kit with A12B2LPB bracket




LPL12CKMB


FMVSS L

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - 0.11A

WT/DIMS .022 lb. / 0.74" x 0.74" x .938" **WARRANTY** Lifetime LED Warranty

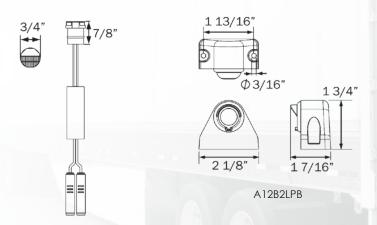






LPL12CB







LPL21 SERIES LED Heavy Duty License Plate Light

- Armored light made of durable, chrome plated steel
- Surface mount on 2" centers
- Design includes both lead and ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION		QTY		
	LICENSE LIGHT - 1 DIODE					
LPL21CB	LPL21CBP	Armored license light		20		
FMVSS	L					
MATERIALS	Steel, polycarbo	nate lens				
VOLT/AMP	12.8VDC - 0.05	4A				
WT/DIMS	.132 lb. / 2.5" x	1.813" x 2"				
WARRANTY	Lifetime LED Wa	arranty				






LPL31CB

LPL31 SERIES Mini LED License Light

- Polished, chrome plated housing
- Surface mount on 2" centers
- Design includes both lead and ground wire
- Two LPL31CB/CEZB required to meet DOT requirements, mounted on each side
- Single LPL31CSB required to meet DOT requirements, mounted at center



LPL31CSB



BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	LICENSE	LIGHT - 2 DIODES	
LPL31CB	LPL31CBP	License light	20
LPL31C1PG	LPL31C1PGP	License light, .180 male bullets	20
LPL31CPG	LP31CPGP	License light, .156 female barrels	20
LPL31CEZB	LPL31CEZBP	License light, .180 female barrels	20
LPL31CSB	LPL31CSBP	Light with spacer	50
LPLB31CPG	LPLB31CPGP	Light with black bracket, .156 female barrels	25
		RETAIL	
LPL31CS	Retail Ready	Light with mounting hardware, clam	12
FMVSS	(2) L		
MATERIALS	Polycarbonate lens	s, chrome plated stainless steel bezel	
VOLT/AMP	12.8VDC - 0.027A		
WT/DIMS	.066 lb. / 2.72" x 1	•	
WARRANTY	Lifetime LED Warr	anty	

LPL41/42/43 SERIES Surface Mount LED License Light

- Armored housing
- · Surface mount using stainless steel ears or studs
- Design includes both lead and ground wire


POLYPACK P/N	DESCRIPTION	QTY
LIC	ENSE LIGHT	
LPL41CBP	5-LED ear mount license light, chrome finish housing	20
LPL42CBFP	5-LED stud mount license light, chrome finish housing	20
LPL43CBP	3-LED ear mount license light, stainless steel base	20
LPL43CGBFP	3-LED stud mount license light, self grounding	20
FMVSS L MATERIALS Polycarbonate lens, chrome plated plastic housing, stainless steel base		
12.8VDC - 0.054A .176 lb. / 4" x 2.188" x 1.563" Lifetime LED Warranty		
	LIC LPL41CBP LPL42CBFP LPL43CBP LPL43CGBFP L Polycarbonate le steel base 12.8VDC - 0.054 .176 lb. / 4" x 2.1	LICENSE LIGHT LPL41CBP 5-LED ear mount license light, chrome finish housing LPL42CBFP 5-LED stud mount license light, chrome finish housing LPL43CBP 3-LED ear mount license light, stainless steel base LPL43CGBFP 3-LED stud mount license light, stainless steel base LPL43CGBFP 3-LED stud mount license light, self grounding L Polycarbonate lens, chrome plated plastic housing, stateel base 12.8VDC - 0.054A .176 lb. / 4" x 2.188" x 1.563"





LPL41CB









1.75" Center, Stainless Steel

LPL55/56 SERIES LED License Light with Bracket

- Light attached to corrosion proof black bracket
- Surface mount on 3-1/4" centers
- · Design includes both lead and ground wire





BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
LICENSE LIGHT - 5 DIODES				
LPL55CB	LPL55CBP	Light with ABS bracket	10	
LPL55CPG	LPL55CPGP	Light with ABS bracket, female PL-10 plug	10	
LPL55CKB	LPL55CKBP	Light/bracket, gasket and hardware	10	
LPL56CB	LPL56CBP	Light with steel bracket and gasket	10	
END/00				


FMVSS L

MATERIALS Polycarbonate lens and housing, plastic bracket

VOLT/AMP 12.8VDC - 0.045A

WT/DIMS .198 lb. / 8.625" x 3.25" x 2.375"

WARRANTY Lifetime LED Warranty











LED License Light with Bracket



- Surface mount, low profile
- Hard wired, with both lead and ground wires





BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	LICE	NSE LIGHT - 1 DIODE	
LPL57CB	LPL57CBP	Light with bracket	10
LPL57CKB	LPL57CKBP	Kit: light with bracket, mounting hardware	10
		ACCESSORIES	
LP52HP	LP52HPP	Mounting hardware: two bolts, two washers, two weld nuts	50
	FMVSS MATERIALS VOLT/AMP WT/DIMS WARRANTY	L Polycarbonate lens and housing, plastic brace 12.8VDC - 0.054A .198 lb. / 8.6" x 2.5" x 2.6" Lifetime LED Warranty	ket

LPL58/59 SERIES

LED Single Piece Molded License Lights

- Stud mount and ear mount models available
- · Chrome finish plastic housing
- · Design includes both lead and ground wire
- Available in bulk and polypack packaging

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	LICEN	SE LIGHT - 1 DIODE	
LPL58CB	LPL58CBP	License light, 2-wire, stud mount	20
LPL59CB	LPL59CBP	License light, 2-wire, ear mount	20

FMVSS L

MATERIALS Chrome finish plastic housing, polycarbonate lens

VOLT/AMP 12VDC - .054A


WT/DIMS LPL58: .13lbs 2.55" x 2.88" x 1.47"

LPL59: .13lbs 4.13" x 2.71" x 1.88"

WARRANTY Lifetime LED Warranty





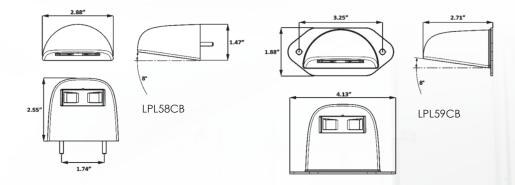












LPL61 SERIES LED License Light

- Sonically sealed, waterproof
- Dual power use with 12V and 24V systems
- Corrosion proof polycarbonate construction
- Design includes both lead and ground wire

DOLVDACK DIN DESCRIPTION

BULK P/N	POLYPACK P/N	DESCRIPTION	QIY		
	LICENSE LIGHT - 6 DIODES				
LPL61C24B	LPL61C24BP	LED license light, black housing, 12-24V	50		
LPL61C24PG	LPL61C24PGP	LED license light, black housing, 12-24V .156 female barrels	10		
FMVSS	L				
MATERIALS	Polycarbonate				
VOLT/AMP	12.8VDC - 0.02	A			
WT/DIMS	.132 lb. / 3.55"	x 1.2" x 1.82"			
WARRANTY	Lifetime LED W	arranty			








LPL65CB





LPL65CBB



LPL65 SERIES **LED License Light**

- Sonically sealed, waterproof
- Accept standard 1- or 2-wire plugs
- Single wire design grounds through mounting hardware
- Two-wire design includes both lead and ground wire for mounting to all surfaces

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	LICENSE	LIGHT - 3 DIODES	
LPL65CB	LPL65CBP	LED license light, gray housing	20
LPL65CBB	LPL65CBBP	LED license light, black housing	20
	AC	CESSORIES	
A65PB	A65PBP	Kit: A65B bracket, A65P plug	50
A66PB	A66PBP	Kit: grey bracket, A65P plug	50
A67CB	A67CBP	Kit: chrome bracket, A65P plug	50
A68PG	A68PBP	Kit: A65B bracket, A68P plug	50

L
Polycarbonate lens and housing
12.8VDC - 0.052A
.089 lb. / 3.9" x 1.3" x 1.2"
Lifetime LED Warranty

LPL81 SERIES

Sealed LED Ear Mount License Light

- Sealed, waterproof electronics
- Surface ear mount
- · Design includes both lead and ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
LICENSE LIGHT - 3 DIODES				
LPL81CB	LPL81CBP	License light, stainless steel mounting ears	20	



MATERIALS Polycarbonate lens, ABS housing, stainless steel base

 VOLT/AMP
 12.8VDC - 0.035A


 WT/DIMS
 .162 lbs / 4" x 2" x 1.91"

 WARRANTY
 Lifetime LED Warranty











LPL82 SERIES

Sealed LED Stud Mount License Light

- Sealed, waterproof electronics
- Stud mount on 1.75" centers
- · Design includes both lead and ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
LICENSE LIGHT - 3 DIODES			
LPL82CB	LPL82CBP	License light, stud mount grey housing	20
LPL82CBB	LPL82CBBP	License light, stud mount black housing	20

FMVSS L

MATERIALS Polycarbonate lens and housing


VOLT/AMP 12.8VDC - 0.035A

WT/DIMS .131 lbs / 2.87" x 2" x 1.91"
WARRANTY Lifetime LED Warranty





















LPL26SKB








LPL91

LPL91 SERIES


Sealed LED License Light

- Sonically sealed, waterproof
- Use with LP25SB bracket and designated license plate brackets
- Design includes both lead and ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	LICENSE	LIGHT - 2 DIODES	
LPL91CB	LPL91CBP	License light	50
LPL91CAB	LPL91CABP	License light, .156 female plugs	50
LPL91CPG	LPL91CPGP	License light, female PL-10 connector	50
LPL91CKALPB	LPL91CKALPBP	License light, .150 female barrels, black light bracket, gasket	50
LPL26SKB	LPL26SKBP	License light, .180 male bullets, gray light bracket	50
	LICENSE	PLATE BRACKETS	
LP25SB	LP25SBP	Bracket, black coated	100
LP25SGGB	LP25SGGBP	Bracket, gray coated	
LP5SB	LP5SBP	Straight license plate bracket	100
LP15SB	LP15SBP	Zinc license plate bracket	12
LP35BB	LP35BBP	License plate holder	25
	AC	CESSORIES	
A91BB	A91BBP	Black base, self grounding	100
A91BOB	A91BOBP	Black base, open back	100
A91CB	A91CBP	Chrome base, self grounding	100
A91OB	A91OBP	Chrome base, open back	100
A91GB	A91GBP	Grommet	100
RETAIL			
LPL91CS	Retail Ready	Light, clam	12
FMVSS	L		
MATERIALS	Polycarbonate lens	and housing	
VOLT/AMP	/AMP 12.8VDC - 0.027A		
WT/DIMS	.066 lb. / 2.5" x 1.25" x 0.813"		



WARRANTY



Lifetime LED Warranty

BUL13 SERIES

4" Round Sealed LED Utility Light


- Miro-Flex[™] design with Crystal Clear[™] lens
- Sonically sealed, waterproof
- · Accepts standard two-pin plugs

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
UTILITY LIGHT - 12 DIODES			
BUL13CB	BUL13CBP	Utility light	10
ACCESSORIES			
A45GB	A45GBP	Grommet	50
A45CB	A45CBP	Pigtail, 2-wire	100
A49PB	A49PBP	Right angle pigtail, 2-wire	100
MATERIALS Polycarbonate lens and housing			
VOLT/AMP	12.8VDC - 0.074A		
WT/DIMS	.331 lb. / 4.313" x 4.313" x 2.375"		
WARRANTY	Lifetime LED Warranty		





BUL13CB



BUL43 SERIES

4" Round Sealed LED Utility Light


- Crystal Clear[™] lens
- · Sonically sealed, waterproof
- Accepts standard two-pin plugs

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	UTILITY LIGHT - 10 DIODES			
BUL43CB	BUL43CBP	Utility light	10	
BUL43CBK	BUL43CBKP	Kit with A45GB grommet and A45CB pigtail	10	
	ACCESSORIES			
A45GB	A45GBP	Grommet	50	
A45CB	A45CBP	Pigtail, 2-wire	100	
A49PB	A49PBP	Right angle pigtail, 2-wire	100	
MATERIALS	Polycarbonate lens and housing			
VOLT/AMP	12.8VDC - 0.275A			
WT/DIMS	.529 lb. / 4.313" x 4.313" x 1.938"			
WARRANTY	Lifetime LED Warr	anty		





BUL43CB









BUL69 SERIES

Sealed LED Thinline Utility Light



- Sonically sealed, waterproof
- Ultra thin only 5/8" thick
- Design includes both lead and ground wire

BUL69CB	BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		UTILITY L	IGHT - 11 DIODES	
	BUL69CB	BUL69CBP	Utility light	10
	BUL69CPG	BUL69CPGP	Light with .180 male bullets	10
	BUL69CBMCV2B	BUL69CBMCV2BP	Kit: 2-wire female PL-3, A69CB base	10
		ACC	CESSORIES	
	A69CB	A69CBP	Chrome base/bezel	10
	A69GB	A69GBP	Gasket	50
14 1/8"	♦ . 3/8"	MATERIALS VOLT/AMP	Polycarbonate lens and housing 12.8VDC - 0.025A	
15"	→ 5/8"	WT/DIMS	.265 lb. / 15" x 1.375" x .625"	
13	5, 5	WARRANTY	Lifetime LED Warranty	



BUL72 SERIES


6" Oval Sealed LED Utility Lights



- BUL72CB
- BUL72CBGK

- Crystal Clear[™] lens Sonically sealed, waterproof
- Accepts standard two-pin plugs

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	UTILITY I	LIGHT - 10 DIODES	
BUL72CB	BUL72CBP	Utility light	10
BUL72CBGK	BUL72CBGKP	Utility light with A70GB grommet	50
BUL74CBK	BUL74CBKP	Utility light with A70GB & A49PB	50
	AC	CESSORIES	
A70GB	A70GBP	Grommet	50
A45CB	A45CBP	Pigtail, 2-wire	100
A49PB	A49PBP	Right angle pigtail, 2-wire	100



MATERIALS Polycarbonate lens and housing **VOLT/AMP** 12.8VDC - 0.080A WT/DIMS .529 lb. / 6.438" x 2.313" x 1.75" WARRANTY Lifetime LED Warranty


BUL73 SERIES

FLEET Count™ 6" Oval Sealed LED Utility Light for Surface Mount

- Sonically sealed, waterproof
- Surface flange mount no panel cutout required
- · Design includes both lead and ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	UTILITY LIGHT - 6 DIODES			
BUL73CB	BUL73CBP	Utility light	10	
	A	CCESSORIES		
A78CB1	A78CB1P	Chrome snap-on trim ring	25	
MATERIALS	Polycarbonate le	ens and housing		
VOLT/AMP	12.8VDC - 0.054	4A		
WT/DIMS	.265 lb. / 7.563"	x 3.313" x .75"		
WARRANTY	Lifetime LED Wa	arranty		





BUL78 SERIES

6" Oval Sealed LED Utility Light for Surface Mount

- Sonically sealed, waterproof
- Surface flange mount no panel cutout required
- · Design includes both lead and ground wire


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	UTILITY	LIGHT - 10 DIODES	
BUL78CB	BUL78CBP	Utility light	10
BUL78CEZB	BUL78CEZBP	Utility light with 2-way female PL-3	10
BUL78C3MB	BUL78C3MBP	Utility light with 2-way female PL-3 plug, adhesive back	10
BUL28CLPB	BUL28CLPBP	Low profile utility light with 2-way female PL-3 connector and gasket	10
	AC	CCESSORIES	
A78CB1	A78CB1P	Chrome snap-on trim ring	25
A78RXB	A78RXBP	Red reflex snap-on trim ring	25
A178TRSSB	A178TRSSBP	Stainless steel screw mount trim ring	50
MATERIALS	Polycarbonate le	ns and housing	
VOLT/AMP	12.8VDC - 0.054	A	
WT/DIMS	BUL78: .265 lb. /	7.563" x 3.313" x .75"	
	BUL28: .255 lb.	/ 7.50" x 3.313" x .5625"	
WARRANTY	Lifetime LED Wa	rranty	







7 9/16" 3 5/16" 2 3/4"













ILLO1 SERIES

3/4" LED Emergency Egress Light

- 3/4" recess mount light for use in transit vehicles
- Hard wired, includes lead and ground with female Staykon connectors
- Sealed, waterproof construction maintenance free
- Snap-in design for quick and easy installation

BULK P/N	BOX/UPC P/N	DESCRIP	TION	QTY
	EGRES	S LIGHT -	1 DIODE	
ILL01RB	ILL01RBP	3/4" egres	ss light	50
	S. MA	ATERIALS	Polycarbonate lens and	housing
13/16"	9/16"	OLT/AMP	12.8VDC1A	
13/16		T/DIMS	0.018 lb. / .695" x .695"	x .81"
1/2"	Ø ~11/16" (17.78mm)	ARRANTY	Lifetime LED Warranty	
19/32"				






LT09COR



ILL06/07 SERIES Opti-Brite™ LED Mini Dome Light

- Compact 11-inch dome light fits many applications
- Design includes 6-inch, 16-gauge power and ground wires with tinned ends
- Available with neutral white or cool white LEDs

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY			
	COOL WHITE - 16 DIODES					
ILL06COB	ILL06COBP	Dome light, white trim ring	12			
	NEUTRAL WHITE - 16 DIODES					
ILL07COB	ILL07COBP	Neutral white LEDs	12			
ACCESSORIES						
A06TR	A06TRP	White trim ring	50			





Raw lumen output: 643 lm Effective lumen output: 354 lm

MATERIALS Polycarbonate lens and housing
VOLT/AMP 12.8VDC - .48A
WT/DIMS .05 lbs. / 11" x 4" x .94"

Lifetime LED Warranty

WARRANTY

ILL08/ILL28 SERIES

Opti-Brite™ LED Dome Lights

- Designed for use in extreme temperatures; ideal for refrigerated trucks and trailers (-40 to 140 degrees F)
- Operating voltage 7-30VDC; voltage cut-off at 7VDC prevents battery drain
- Use with both 12VDC and 24VDC systems; light output remains consistent at all operating voltages (no dimming), cutting off when voltage is outside range
- Design includes 16-inch, 16-gauge power and ground wires with tinned ends



ILL08COB




ILL28CMB

ILL10CCB

BULK P/N	BOX/UPC P/N	DESCRIPTION	QTY		
DOME LIGHT - 8 DIODES					
ILL08COB	ILL08COBP	Light	6		
ILL08COPG	ILL08COPGP	Light, .180 male bullets	6		
MOTION SENSOR DOME LIGHT - 8 DIODES					
ILL28CMB	ILL28CMBP	Light with motion sensor	6		
ILL28CMPG	ILL28CMPGP	Light with motion sensor, .180 male bullets	6		

Raw lumen output: 1400 lm Effective lumen output: 990 lm

MATERIALSPolycarbonate lens and housingVOLT/AMP12.8VDC - 1.61A; 24VDC - 0.80AWT/DIMS1 lb. / 18.25" x 5.75" x 1.078"WARRANTYLifetime LED Warranty



ILL10 SERIES

Opti-Brite™ LED Dome Light

For 12VDC systems, general applications


BULK P/N	BOX/UPC P/N	DESCRIPTION	QTY		
DOME LIGHT - 10 DIODES					
ILL10CCB	ILL10CCBP	11-16VDC Dome light	6		

Raw lumen output: 1100 lm **Effective lumen output:** 880 lm

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - 1.8A

WT/DIMS 1 lb. / 18.25" x 5.75" x 1.078" **WARRANTY** Lifetime LED Warranty














ILL11 SERIES

Opti-Brite™ LED Dome Lights

- Designed for extreme temperatures; ideal for refrigerated trucks and trailers (-40 to 185 degrees F)
- Color temperature of light: 5300-7000K
- Design includes 18-inch, 16-gauge power and ground wires with tinned ends

BULK P/N	BOX/UPC P/N	DESCRIPTION	QTY
	DOME LIG	HT - 10 DIODES	
ILL11CCB	ILL11CCBP	Light	6

Raw lumen output: 1100 lm **Effective lumen output:** 880 lm

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - 1.33A


WT/DIMS 1.43 lbs / 18.25" x 5.75" x 1.09"

WARRANTY Lifetime LED Warranty

ILL21 SERIES

Opti-Brite™ LED 6" Dome Light

- Low profile dome light less than 5/8" thick
- Operating voltage 12-24VDC; use with both 12VDC and 24VDC systems
- Low voltage cut-off at 11VDC, prevents battery drain
- Sealed, waterproof

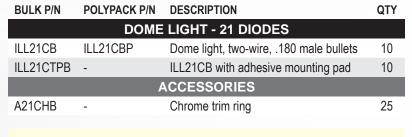

Raw lumen output: 250 lm Effective lumen output: 214 lm

MATERIALS Polycarbonate lens and housing


VOLT/AMP 12.8VDC - .408A; 24VDC - .385A

WT/DIMS .250 lb. / 6.0938" x 6.0938" x .625"

WARRANTY Lifetime LED Warranty







Opti-Brite

ILL22CBB

ILL22 SERIES

Sealed LED Dome Lights

- Low profile dome lights only 1" thick
- Sealed, waterproof design
- Hard wired with 6" power and ground wires




BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
	DOME LIGHT - 18 DIODES				
ILL22CB	ILL22CBP	Dome light, on/off switch	10		
ILL22C1224B	ILL22C1224BP	Dome light, on/off switch,12/24V	10		
ILL22CBB	ILLCBBP	Dome light, on/off switch, black circuit board	10		
ILL22CHB	ILL22CHBP	Dome light, no switch	10		
		RETAIL			
ILL22CFS	Retail Ready	Dome light, clam	12		
Raw lumen output: 1044 lm					

Raw lumen output: 1044 lm **Effective lumen output:** 810 lm

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - .7A

WT/DIMS .182 lb. / 4.5" x 2.875" x 1"
WARRANTY Lifetime LED Warranty











ILL124CPG





ILL124 SERIES

Opti-Brite™ LED 6" Dome Light

- Low profile dome lights only 7/8" thick
- Sealed, waterproof
- Hard wired design includes power and ground wires

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	DOME	LIGHT - 36 DIODES	
ILL124CPG	ILL124CPGP	Dome light, .180 male bullets	10

Raw lumen output: 585 lm **Effective lumen output:** 431 lm

Polycarbonate lens and housing **MATERIALS**

VOLT/AMP 12.8VDC - 0.127A

WT/DIMS .353 lb. / 6.125" x 6.125" x 0.875"


WARRANTY Lifetime LED Warranty





ILL24 SERIES

Sealed LED 6" Dome Light



Sealed, waterproof

Hard wired design includes power and ground wires



ILL24CB

BULK P/N	POLYPACK P/N	I DESCRIPTION	QTY
	DOME	LIGHT - 36 DIODES	
ILL24CB	ILL24CBP	Dome light	10
ILL24CPG	ILL24CPGP	Dome light, .180 male bullets	10

Raw lumen output: 585 lm **Effective lumen output:** 453 lm



MATERIALS Polycarbonate lens and housing VOLT/AMP 12.8VDC - .127A

WT/DIMS .353 lb. / 6.125" x 6.125" x 0.875"

WARRANTY Lifetime LED Warranty

ILL29 Series

Opti-Brite™ 4" LED Dome Lights

- Sonically sealed, waterproof
- · Recess mount design
- Available in grommet and flange mount models
- Hard wired with .180 male bullets

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	DOM	E LIGHT - 7 DIODES	
ILL29CB	ILL29CBP	Dome light, grommet mount	10
ILL29CFB	ILL29CFBP	Dome light, flange mount	10
		ACCESSORIES	
A45GB	A45GBP	PVC grommet	50
A46GB	A46GBP	PVC grommet, new design	50

Raw lumen output: 500 lm **Effective lumen output:** 360 lm


MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - 0.3A

WT/DIMS Grommet: .26 lb / 4.25" x 4.25" x .9"

Flange: .3 lb / 5.5" x 5.5" x .9"

WARRANTY Lifetime LED Warranty

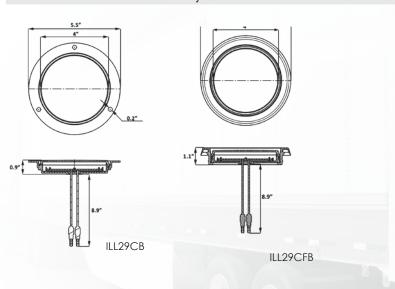

















ILL30CBB SERIES

Constellation™ LED Bullet Light


- Surface mount fixture; trim ring covers mounting hardware
- Ratchet motion design with on/off switch
- Lightly frosted lens
- Hard wired design includes power and ground wires

BULK P/N	POLYPACK P/N	DESCRIPTION		QTY
	BULLE	T LIGHT - 1 I	DIODE	
ILL30CBB	ILL30CBBP	Bullet light		25
MATERIALS	Plastic housing			
VOLT/AMP	12.8VDC288	A		
WT/DIMS	.250 lb. / 3.75"	x 1.938" x 3.5"		
WARRANTY	Lifetime LED W	arranty		





ILL31CB







ILL31/32/35 SERIES LED Low Profile Dome Lights

- · Low profile dome lights for semi-recess or surface mount
- Durable steel housing and replaceable polycarbonate lens
- Hard wired design includes power and ground wires
- Select from standard diode or SMD LED models

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
R	ECESS MOUN	T DOME LIGHT - 10 DIODES	
ILL31CB	ILL31CBP	Standard LED	10
ILL35CB	-	SMD LED	10
SL	JRFACE MOUN	IT DOME LIGHT - 10 DIODES	
ILL32CB	ILL32CBP	SMD LED	10
ILL32CPG	-	SMD LED, .180 male bullets	10

Raw lumen output: 70 lm Effective lumen output: 53 lm

MATERIALS Polycarbonate lens, plated steel housing

VOLT/AMP 12.8VDC - .024A

WT/DIMS ILL31/35: .243 lb. / 5.75" x 2.75" x .938"

ILL32: .243 lb. / 5.75" x 2.75" x .75"

WARRANTY Lifetime LED Warranty

ILL33 SERIES

Opti-Brite™ LED Sealed Dome Light

- Low profile surface mount design less than 3/4" thick
- Hard wired design includes 18-gauge lead wires
- · Sealed, waterproof

BULK P/N	POLYPACK P/N	N DESCRIPTION	QTY
	DOME	LIGHT - 10 DIODES	
ILL33CB	ILL33CBP	Dome light	10

Raw lumen output: 210 lm Effective lumen output: 160 lm

MATERIALS Polycarbonate lens and housing


VOLT/AMP 12.8VDC - .147A

WT/DIMS .154 lb. / 5.125" x 2.25" x .75" **WARRANTY** Lifetime LED Warranty





ILL33CB





ILL36 SERIES

Opti-Brite™ LED Sealed Dome Light

- Low profile surface mount design less than 3/4" thick
- · Sealed, waterproof
- Durable polycarbonate construction

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	DOM	E LIGHT - 9 DIODES	
ILL36CB	ILL36CBP	Dome light	10
ILL36CPG	ILL36CPGP	Dome light, .180 male bullets	10

Raw lumen output: 400 lm Effective lumen output: 227 lm

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - .33A

WT/DIMS .154 lb. / 5.75" x 2.75" x .688" **WARRANTY** Lifetime LED Warranty





ILL36CB









ILL38CMB

LED Corner Mount Interior Lamp



- Modular design with PIR-based motion sensor for interior cargo applications
- 30 ultra-bright white SMD LED's
- Dual power 12/24VDC
- Operating environment -4° to 140° F
- 16-inch leads

POLYPACK P/N	DESCRIPTION	QTY
INTERIOR	LIGHT - 30 DIODES	
ILL38CMBP	Corner mount interior lamp, hard wired	20
	INTERIOR	INTERIOR LIGHT - 30 DIODES ILL38CMBP Corner mount interior lamp,

MATERIALS Polycarbonate lens, metal housing with white finish

VOLT/AMP 12/24VDC

.89 lb. / 17.72" x 2.45" x 2.22" WT/DIMS WARRANTY Lifetime LED Warranty



ILL39 SERIES

Opti-Brite™ LED 7" Dome Light

- Low profile dome light less than 5/8" thick
- Operating voltage 12-24VDC; use with both 12VDC and 24VDC systems
- Low voltage cut-off at 11VDC, prevents battery drain
- Hard wired design includes 16-gauge power and ground wires with .180 male bullets
- · Sealed, waterproof

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	DOME	LIGHT - 39 DIODES	
ILL39CB	ILL39CBP	Dome light	5/10
ILL39RCB	ILL39RCBP	Dome light, red diodes, .180 male bullets, 11V voltage cut-off	5


Raw lumen output: 460 lm Effective lumen output: 390 lm

MATERIALSPolycarbonate lens and housingVOLT/AMP12.8VDC - .669A; 24VDC - .217AWT/DIMS.350 lb. / 6.969" x 6.969" x .625"WARRANTYLifetime LED Warranty









ILL45 SERIES

Opti-Brite™ LED Interior Light

- Low profile surface mount design less than 1" thick
- Durable polycarbonate construction

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	INTERIOF	R LIGHT - 42 DIODES	
ILL45CB	ILL45CBP	Interior light	50

Raw lumen output: 300 lm Effective lumen output: 260 lm


MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - .37A

WT/DIMS .206 lbs. / 4.625" x 4.625" x .79"

WARRANTY Lifetime LED Warranty











ILL46 SERIES

Opti-Brite™ Sealed LED Dome Light

- Low profile surface mount design less than 3/4" thick
- Sealed, waterproof
- Durable polycarbonate construction

BULK P/N	POLYPACK P/N	DESC	RIPTION		QTY
	DOME L	IGHT -	- 9 DIOD	ES	
ILL46CB	ILL46CBP	Dome	light		10
Raw lum	en output:		540 lm		
Effective	lumen outpu	ut:	380 lm		
MATERIALS	Polycarbonate	lens an	d housing		
VOLT/AMP	12.8VDC33A				
WT/DIMS	.154 lbs. / 5.75	" x 2.75	" x .688"		
WARRANTY	Lifetime LED V	Varranty	,		



2 3/4"

ILL48 SERIES

Opti-Brite™ Sealed LED Dome Light



- · Low profile surface mount design
- · Sealed, waterproof
- Durable polycarbonate construction
- · Hard wired with both power and ground wire
- Available in bulk and polypack packaging



BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	DOME I	_IGHT - 9 DIODES	
ILL48CB	ILL48CBP	Dome light, 5-in. lead, black base	50


Raw lumen output: 540 lm
Effective lumen output: 380 lm

ILL48CB	
	*
11.	/16"
5 3/4"	4
5"	3/4"
MOUNT ON 4.68" CENTERS	

MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC33A
WT/DIMS	.154 lbs. / 5.75" x 2.75" x .69"
WARRANTY	Lifetime LED Warranty

ILL70/71/72 SERIES

Opti-Brite[™] LED Interior Strip Lights for Surface Mount



- Hard wired design includes both lead and ground wires
- Select from 9-inch, 16-inch and 22-inch models
- Sealed, waterproof



10000000000

9 5/8" 9 3/32

ILL70

15 3/4"

15 3/16'

ILL70CB

10000000000000000000

ILL71CB

ILL72CB

Ø 5/32"

5/8"

Ø 5/32"

5/8"

Ø 5/32"

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
!	9" WHITE LED STR	RIP LIGHT - 9 DIODES	
ILL70CB	ILL70CBP	Strip light	20/10
ILL70CSB	ILL70CSBP	Strip light with on/off switch	10
ILL70C24B	ILL70C24BP	Strip light, 24-in. leads	10

Raw lumen output: 189 lm Effective lumen output: 171 lm

16" WHITE LED STRIP LIGHT - 18 DIODES				
ILL71CB	ILL71CBP	Strip light	20/10	
ILL71CSB	ILL71CSBP	Strip light with on/off switch	10	
ILL71CPG	ILL71CPGP	Strip light, .180 male bullets	10	

Raw lumen output: 370 lm Effective lumen output: 342 lm

1" ILL71 100 0 0 21 7/8" 21 9/32" 1" ILL72

22" WHITE LED STRIP LIGHT - 27 DIODES

ILL72CB ILL72CBP Strip light 20/10

Raw lumen output: 567 lm Effective lumen output: 513 lm

MATERIALS

Polycarbonate lens and housing

VOLT/AMP

ILL70: 12.8VDC - .150A ILL71: 12.8VDC - .300A ILL72: 12.8VDC - .480A

WT/DIMS

ILL70: .154 lb. / 9.625" x 1" x .625" ILL71: .187 lb. / 15.75" x 1" x .625" ILL72: .210 lb. / 21.875" x 1" x .625"

WARRANTY

Lifetime LED Warranty







ILL70/71 AWNING SERIES

Opti-Brite[™] LED Awning Lights for Surface Mount




ILL71CBAWN


Low profile awning mount lights with wedge base that directs light at a 45-degree angle

Hard wired design includes both lead and ground wires

- Select from 11-inch and 18-inch models
- Available in amber and white LED
- Sealed, waterproof



BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	11" WHITE LE	D - 9 DIODES		
ILL70CBAWN	ILL70CBAWNP	No switch, chrome housing	10	
ILL70CBBAWN	ILL70CBBAWNP	No switch, black housing	10	
ILL70CBSBAWN	ILL70CBSBAWNP	On/off switch, black housing	10	
ILL70CCSBAWN	ILL70CCSBAWNP	On/off switch, chrome housing	10	
	11" AMBER LE	D - 9 DIODES		
ILL70ABBAWN	ILL70ABBAWNP	No switch, black housing	10	
	RETAIL			
ILL70CBAWNFS	Retail Ready	Light, no switch, chrome bezel	12	
Raw lumen output: 189 lm				
Effective lumen output: 171 lm				



BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	18" WHITE LE	ED - 18 DIODES		
ILL71CBAWN	ILL71CBAWNP	No switch, chrome housing	10	
ILL71C1BAWN	ILL71C1BAWNP	No switch, chrome housing, high lumen output	10	
	ACCES	SSORIES		
A71CBAWN	A71CBAWNP	Chrome base for ILL71CBAWN	10	
A71CCBWAN	A71CCBWANP	Chrome base and bezel for ILL71CBAWN	10	
A71C1BAWN	A71C1BAWNP	Chrome base for ILL71C1BAWN	25	
RETAIL				
ILL71CBAWNFS	Retail Ready	Light, no switch, chrome bezel	12	
Raw lumen output: 370 lm				
Effective lumen output: 342 lm				

IP67 rating: protected from dust and capable of withstanding water immersion, offering increased reliability and service life

MATERIALS Polycarbonate lens and housing VOLT/AMP ILL70: 12.8VDC - .150A

ILL71: 12.8VDC - .300A

WT/DIMS ILL70: .154 lb. / 11.313" x 1.625" x 1.125"


ILL71: .187 lb. / 18" x 2.125" x 1.063"

WARRANTY Lifetime LED Warranty

ILL85 SERIES

LED Exterior Step/Area Light


- Illuminate step well or pavement at base of steps or ramps
- Meets ADA lighting standard
- Surface mount, 3.662" mounting centers
- · Hard wired design includes both lead and ground wires
- Operating voltage 8-30VDC, for use with 12VDC or 24VDC systems
- Polycarbonate construction with polished chrome finish
- · Mounting gasket included

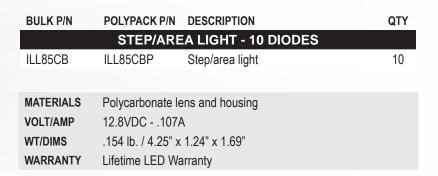










ILL86 SERIES

LED Exterior Step/Area Light

- · Illuminate step well or pavement at base of steps or ramps
- Meets ADA lighting standard
- Surface mount, 2.92" mounting centers
- Hard wired design includes both lead and ground wires
- Die cast aluminum housing coated for protection against corrosion and UV exposure; polycarbonate lens

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	STEP/AR	EA LIGHT - 5 DIODES	
ILL86CB	ILL86CBP	Step/area light, white finish	10
ILL86BCB	ILL86BCBP	Step/area light, black finish	10
MATERIALS	Die cast alumin	um housing, polycarbonate lens	
VOLT/AMP	12.8VDC25A		
WT/DIMS	.154 lb. / 4" x 2.	5" x 1.313"	
WARRANTY	Lifetime LED W	arranty	
	2 1/2"		1 5/16"










ILL86CB











ILL87 SERIES LED ADA Exterior Step/Area Light


- Illuminate step well or pavement at base of steps or ramps
- Meets ADA lighting standard
- Surface mount, 2.92" mounting centers
- Hard wired design includes both lead and ground wires

BULK P/N	POLYPACK P/N	DESCRIPTION		QTY
	STEP/AR	EA LIGHT - 5 D	OIODES	
ILL87CB	ILL87CBP	Step/area light		10
MATERIALS	Polycarbonate	lens and housing		
VOLT/AMP	12.8VDC17A	4		
WT/DIMS	.231 lbs / 4" x 2	2.5" x 1.29"		
WARRANTY	Lifetime LED V	/arranty		





ILL91CB



ILL91 SERIES

6" LED Interior Dome Light

- Surface mount steel base, chrome plated
- Hard wired design includes both lead and ground wires
- · Two diodes provide low amp draw, bright white light

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
DOME LIGHT - 6 DIODES			
ILL91CB	ILL91CBP	Dome light	50
ILL91CPG	ILL91CPGP	Dome light, .180 male bullets	50
Raw lumen output: 600 lm Effective lumen output: 540 lm			

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - .35A

WT/DIMS .154 lb. / 6.438" x 6.438" x 1.625"

WARRANTY Lifetime LED Warranty

LM SERIES LED Courtesy & Accent Lights

- LM315BB is semi-recess mount courtesy light
- LM835CB is eight-diode recess mount accent light with clear lens and chrome trim ring; screw mount
- · All models are hard wired with ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	COURTE	SY LIGHT - 3 DIODES	
LM315BB	LM315BBP	Courtesy light, black	50
	ACCE	NT LIGHT - 8 DIODE	
LM835CB	LM835CBP	Recess mount accent light	50
MATERIALS	Polycarbonate	lens and housing	
VOLT/AMP	LM315BB:	12.8VDC007A	
	LM835CB:	12.8VDC087A	
WT/DIMS	LM315BB:	.187 lb. / 2.25" x 2.25" x 1.625"	
	LM835CB:	.210 lb. / 3.75" x 3.75" x 0.75"	
WARRANTY	Lifetime LED W	/arranty	





LM315BB



LM835CB

UCL07 SERIES Silicone LED Rope Light

- Lumen rating: 1800 lm
- · Sonically sealed, waterproof
- Flexible silicone design
- · Surface adhesive mount
- Hard wired
- IP66 rating

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	STRIP LIGI	HT - 76 COB	
UCL07CB	UCL07CBP	Rope light, silicone color	1
MATERIALS	Polycarbonate lens	s and housing	
VOLT/AMP	12.8VDC892A		
WT/DIMS	33"		
WARRANTY	Lifetime LED Warr	anty	














UCL09 SERIES

3" Sealed LED Utility/Hitch Light for Surface Mount

- Designed to illuminate hitch area of trailer
- Sonically sealed, waterproof
- Flange surface mount no panel cutout required
- Design includes both lead and ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	WHITE UT	ILITY LIGHT - 9 DIODES		
UCL09CB	UCL09CBP	Utility light, 9 white LEDs	50	
	BLUE UT	LITY LIGHT - 9 DIODES		
UCL09CBB	UCL09CBBP	Utility light, 6 white, 3 blue LEDs, 3-wire	50	
	RED UTILITY LIGHT - 9 DIODES			
UCL09RCB	UCL09RCBP	Utility light, 9 red LEDs	50	
	ACCESSORIES			
A09BB	A09BBP	Black snap-on trim ring	50	
A09CB	A09CBP	Chrome snap-on trim ring	50	
A09WB	A09WBP	White snap-on trim ring	50	
A09GB	A09GBP	Black gasket	50	

MATERIALS	Polycarbonate lens and housing
VOLT/AMP	UCL09CB: 12.8VDC - 0.074A
	UCL09CBB: 12.8VDC - 0114A
WT/DIMS	.265 lb. / 3.25" x 3.25" x .813"
WARRANTY	Lifetime LED Warranty



UCL10 SERIES

3/4" Sealed LED Utility Light

- Sealed, waterproof
- Compact fits 3/4" hole
- Design includes both lead and ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	UTILITY	/ LIGHT - 1 DIODE	
UCL10CKB	UCL10CKBP	Clear utility light, A11GB	50
UCL10CK1B	UCL10CK1BP	Clear utility light, A11GB, .156 male bullets	50
	BL	UE - 1 DIODE	
UCL10BCKB	UCL10BCKBP	Blue utility light, A11GB	20
MATERIALS Polycarbonate lens and housing			
VOLT/AMP 12.8VDC - 0.054A			
WT/DIMS	.265 lb. / 0.74" x 0.74" x 0.938"		
WARRANTY	Lifetime LED Wa	rranty	








JCL10CKB





UCL10BCKB













UCL11 SERIES 3/4" Sealed LED Utility Light

- Sealed, waterproof
- Compact fits 3/4" hole
- Design includes both lead and ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	UTILITY	LIGHT - 2 DIODES	
UCL11CB	UCL11CBP	Utility light	50
UCL11CKB	UCL11CKBP	Kit: UCL11CB & A11GB grommet	50
UCL11CKPG	UCL11CKPGP	Kit: UCL11CB with .180 male bullets & A14GB grommet	50
	AC	CESSORIES	
A11GB	A11GBP	Grommet	100
A14GB	A14GBP	Sealing grommet, .125250" material	100
A11PB	A11PBP	Snap-in mounting flange	100
MATERIALS	Polycarbonate le	ns and housing	
VOLT/AMP	12.8VDC - 0.054	A	
WT/DIMS	.265 lb. / 0.74" x	0.74" x 0.938"	
WARRANTY	Lifetime LED Wa	rranty	






UCL13C2PG



UCL13CB2B



UCL13 SERIES Sealed LED Utility Light

- · Sealed, waterproof
- · Compact, surface mount design
- · Design includes both lead and ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
	WHITE UTILITY LIGHT - 2 DIODES				
UCL13C2PG	UCL13C2PGP	Utility light, .180 female barrels	20		
UCL13CPG	UCL13CPGP	Utility light, .156 male bullets	20		
	BLUE	- 2 DIODES			
UCL13CB2B	UCL13CB2BP	Blue LED utility light	20		
	ACC	ESSORIES			
A13C2B	A13C2BP	Chrome base/bezel	100		
A13B2B	A13B2BP	Black base/bezel	100		
A13G2B	A13G2BP	Gasket	200		
MATERIALS	Polycarbonate lens	and housing			
VOLT/AMP	12.8VDC - 0.020A				
WT/DIMS	.088 lb. / 2.5" x 1.063" x .688"				
WARRANTY	Lifetime LED Warra	anty			

UCL19 SERIES

Miro-Flex™ Sealed LED Utility Light


- Sealed, waterproof
- Surface mount, mounts on 4-5/8" centers
- Design includes both lead and ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
UTILITY LIGHT - 4 DIODES				
UCL19CB	UCL19CBP	Utility light	20	
	A	CCESSORIES		
A19CB	A19CBP	Chrome bezel	100	
MATERIALS	Polycarbonate	lens and housing		
VOLT/AMP 12.8VDC - 0.051A				
WT/DIMS .132 lb. / 5.75" x 1.563" x .75"				
WARRANTY	Lifetime LED W	/arranty		





UCL19CB




UCL41 SERIES

LED Low Profile Exterior Scene Light

- Sonically sealed, waterproof
- Low profile design with 45-degree downward angle (lens angle at 15 degrees)
- Surface flange mount on 7.875" centers
- Operating voltage 12-24VDC; use with both 12VDC and 24VDC systems
- IP67 Rated
- Hard wired with 6" lead and ground wires

BULK P/N	POLYPACK P/N	DESCRIPTION		QTY	
	UTILIT	Y LIGHT - 12 DIODES			
UCL41CB	UCL41CBP	Exterior scene light, 12V-24V		10	
	ACCESSORIES				
A41CBB	A41CBBP	Black plastic bezel		50	
A41CRB	A41CRBP	Chrome bezel		50	
Raw lumen output: 2400 lm					
Effective lumen output: 1200 lm					


MATERIALS	Aluminum base, polycarbonate lens
VOLT/AMP	12.8VDC - 2.07A / 24VDC - 0.96A
WT/DIMS	1 lb. / 8.7" x 2.95" x 1.59"






















UCL50CB



UCL50 SERIES


Miro-Flex[™] 2" Sealed LED Utility Light

- Miro-Flex[™] design with Crystal Clear[™] lens
- Operating voltage 12-24VDC
- Sonically sealed, waterproof
- · Accepts standard two-pin PL-10 plug

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	UTILITY	LIGHT - 9 DIODES	
UCL50CB	UCL50CBP	12-24VDC Utility light	20
	A	CCESSORIES	
A46PB	A46PBP	Straight plug, 6" lead	100
A86PB	A86PBP	Straight plug, 18" lead	100
A54GB	A54GBP	2" Flush mount grommet	100
A54GK	A54GKP	2" Kit: A54GB and A46PB	100
A55CB	A55CBP	2" Chrome trim ring	20
BK5557GB	BK5557GBP	Cam-on mounting bracket	50
MATERIALS	Polycarbonate le	ens and housing	
VOLT/AMP	12.8VDC - 0.013	3A	
WT/DIMS	.088 lb. / 2" x 2"	x 1.188"	
WARRANTY	Lifetime LED Wa	arranty	







UCL55 SERIES

2" Sealed LED Utility Light

- · Sonically sealed, waterproof
- · Accepts standard two-pin PL-10 plug

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
UTILITY LIGHT - 3 DIODES			
UCL55CB	UCL55CBP	Utility light	20
	A	CCESSORIES	
A46PB	A46PBP	Straight plug, 6" lead	100
A86PB	A86PBP	Straight plug, 18" lead	100
A54GB	A54GBP	2" Flush mount grommet	100
A54GK	A54GKP	2" Kit: A54GB and A46PB	100
A55CB	A55CBP	2" Chrome trim ring	20
BK5557GB	BK5557GBP	Cam-on mounting bracket	50
MATERIALS	Polycarbonate le	ens and housing	
VOLT/AMP	12.8VDC - 0.04	7A	
WT/DIMS	.088 lb. / 2" x 2" x 1"		
WARRANTY	Lifetime LED Warranty		

UCL59 SERIES

Thinline Sealed LED Utility Light





UCL59CB

- Sonically sealed, waterproof
- Low profile design less than 1/2" thick
- Surface mount on 11-3/4" centers
- · Hard wired with separate ground wire
- Available in bulk and polypack packaging


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
THINLINE UTILITY LIGHT - 9 DIODES				
UCL59CB	UCL59CBP	Bar style utility light, 2-wire	10	

Raw lumen output: 585 lm **Effective lumen output:** 386 lm

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - 0.22A

WT/DIMS 0.2 lbs. / 12.625" x 1" x .41"
WARRANTY Lifetime LED Warranty



















UCL60/160 SERIES Sealed LED Utility Light

- Sealed, waterproof
- Compact, surface mount design
- Design includes both lead and ground wire
- CSA certified for use in sleeping quarters
- Snap-on trim ring included, multiple finishes available

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
ТО	UCH SWITCH I	UTILITY LIGHT - 6 DIODES	
UCL60CSBB	UCL60CSBBP	Utility light, black trim ring	20
UCL60CSNB	UCL60CSNBP	Utility light, brushed nickel trim ring	20
UCL60CSWNB	UCL60CSWNBP	Utility light, warm white LED, brushed nickel trim ring	20
ι	JTILITY LIGHT,	NO SWITCH - 6 DIODES	
UCL60CB	UCL60CBP	Utility light, chrome trim ring	20
UCL60CBPG	UCL60CBPGP	Utility light, chrome trim ring, .180 female barrels	20
Raw lumen output: 224 lm Effective lumen output: 168 lm			
Lifective	idilicii odipo	100 1111	


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	GLOLIGHT™ UT	ILITY LIGHT - 6 DIODES	
UCL160CB	UCL160CBP	Utility light, chrome trim ring	20
	men output:	224 lm ut: 168 lm	

MATERIALS Polycarbonate lens and housing

 VOLT/AMP
 12.8VDC - 0.020A

 WT/DIMS
 .088 lb. / 3" x 3" x .375"

 WARRANTY
 Lifetime LED Warranty



UCL65 SERIES

Sealed LED Thinline Utility Light

- · Sealed, waterproof
- · Multiple mounting and wiring options available

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	UTILITY LIGHT - 6 DIODES			
UCL65CB	UCL65CBP	Utility light	20	
		ACCESSORIES		
A65B	A65BP	Black bracket	50	
A65P	A65PP	Single wire plug, .156 male bullet	50	
A65PB	A65PBP	Kit: A65B black bracket & A65P plug	50	
A66PB	A66PBP	Kit: Gray bracket & A65P plug	50	
A67CB	A67CBP	Kit: Chrome bracket & A65P plug	50	
A68PB	A68PBP	Kit: Black bracket & 2-wire plug	50	
For more details on mounting and wiring accessories, see Accessories section at back of catalog.				

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - 0.048A


WT/DIMS .066 lb. / 3.875" x 1.25" x 1.125"


WARRANTY Lifetime LED Warranty





UCL65CB







UCL66 SERIES

Sealed LED Surface Mount Utility Light

- Sonically sealed, waterproof
- Surface mount, mounts on 3" centers
- · Includes both lead and ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
GREEN UTILITY LIGHT - 6 DIODES				
UCL66GB	UCL66GBP	Utility light	20	


MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - 0.057A

WT/DIMS .088 lbs. / 4" x .875" x 1.188"
WARRANTY Lifetime LED Warranty




















UCL90 SERIES

LED Flexible Strip Lighting

- Cut to desired length
- Flexible design fits many applications
- Supplied in 17-ft rolls
- Adhesive mount
- Available with white or blue diodes

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY			
	WHITE STRIP LIGHT					
UCL90CB	UCL90CBP	17-foot roll	10			
	BLUE	STRIP LIGHT				
UCL90BCB	UCL90BCBP	17-foot roll	10			
	AC	CESSORIES				
A90PB	A90PBP	Snap-on connector, wire leads	20			
A90P1B	A90P1BP	Snap-on connector, strip-to-strip	20			
MATERIALS	Diodes, coppe	r, polyimide polymer, adhesive				
VOLT/AMP	12.8VDC					
WT/DIMS	Reel: .39 lbs /	6.10" x 6.10" x 0.48"				
	Strip: .39 lbs /	204" x 0.375" x 0.125"				
WARRANTY	Lifetime LED V	Varranty				

UCL91/92 SERIES LED Flexible Strip Lighting

- · Cut to desired length
- · Flexible design fits many applications
- Kits include strip light and two each snap-on connectors A90PB and A90P1B
- Supplied in rolls (17ft and 5ft)
- · 3M adhesive backing
- IP65 rated for dust and water resistance
- · Available with white or blue diodes
- · Supplied in color retail boxes






UCL91CB



BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	WHI	TE STRIP LIGHT		
UCL91CB	-	17-foot roll, color box	10	
UCL92CB	-	5-foot roll, color box	10	
UCL91CKB	-	Kit: 17-foot roll, color box	10	
UCL92CKB	-	Kit: 5-foot roll, color box	10	
	BLU	JE STRIP LIGHT		
UCL91BCB	-	17-foot roll, color box	10	
UCL92BCB	-	5-foot roll, color box	10	
UCL91BCKB	-	Kit: 17-foot roll, color box	10	
UCL92BCKB	-	Kit: 5-foot roll, color box	10	
ACCESSORIES				
A90PB	A90PBP	Snap-on connector, wire leads	20	
A90P1B	A90P1BP	Snap-on connector, strip-to-strip	20	




UCL92CB



UCL92BCB

MATERIALS	Diodes, copper, polyimide polymer, adhesive
VOLT/AMP	12.8VDC
WT/DIMS	.39 lbs / Reel: 6.10" x 6.10" x 0.48"
	Strip: 204" x 0.375" x 0.125"
WARRANTY	Lifetime LED Warranty





GloLight




Tail and Utility



Unlit



UCL178RFP2B Auxiliary



UCL178 SERIES

GloLight® 6" Oval Sealed LED Utility Lights for Surface Mount

- LED utility light with built-in auxiliary tail light
- Sonically sealed, waterproof
- Surface flange mount no panel cutout required
- Design includes both lead and ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	UTILITY LIC	SHT - 22 DIODES	
UCL178RFP2B	UCL178RFP2BP	Hard wired, female PL-3 connector	10
	ACCI	ESSORIES	
A78CB1	A78CB1P	Chrome flange cover	25
A78RXB	A78RXBP	Red reflex flange cover & gasket	25
A7TRSSB	A7TRSSBP	Stainless steel trim ring	100

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - 0.50A

WT/DIMS .265 lbs. / 7.5" x 3.25" x 1.25"
WARRANTY Lifetime LED Warranty



UCL299 SERIES Utility Light


- Sonically sealed, waterproof
- Adhesive mount
- Hard wired, includes separate ground wire
- Available in bulk and polypack packaging

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	UTILITY	LIGHT - 1 DIODE	
UCL299CPG	UCL299CPGP	Clear utility light, .180 male bullets	50



MATERIALS Polycarbonate lens and housing **VOLT/AMP** 12.8VDC - .12A

WT/DIMS .046 lb. / 1.53" x .73" x .5" WARRANTY Lifetime LED Warranty





ULL25CTB

ULL25 SERIES COB LED Utility Strip Light

- Waterproof
- Slim design only 5/8" wide and 3/16" thick
- Design includes both lead and ground wire



Ultrawhit	e – color temp	perature 6500K		
BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	STRIP L	IGHT - 76 COB		
LILL OF CTVDD	LILL OF CTV/DDD	10\/ atria limbt waltama manulatan	EO	

12V strip light, voltage regulator ULL25CTVRB ULL25CTVRBP ULL25CTB **ULL25CTBP** 12V strip light 50

> Raw lumen output: 380 lm Effective lumen output: 220 lm

MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12 8\/DC = 3A

WT/DIMS .25 lb. / 6.829" x .616" x 0.14" WARRANTY Lifetime LED Warranty








ULL69APG Thinline Sealed LED Utility Light



- Sonically sealed, waterproof
- Low profile design-only 5/8" thick
- Surface mount on 14-1/8" centers; optional gasket
- Three-wire design low and bright functions
- Hard wired with separate ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
	YELLOW - 11 DIODE				
ULL69APG	ULL69APGP	Bar style utility light, 2-wire	10		
	ACCESSORIES				
A69CB	A69CBP	Chrome base/bezel	10		
A69GB	A69GBP	Gasket	50		



MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8V - 0.28A/0.01A
WT/DIMS	.441 lbs. / 15" x 1.375" x .625"
WARRANTY	Lifetime LED Warranty

TLL149 SERIES

Opti-Brite™ LED Work Light

- Heavy duty design with powder coated, die cast aluminum housing and polycarbonate lens
- Dual power: use with 12VDC and 24VDC systems
- Stainless steel mounting hardware

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
FLOOD BEAM - 10 DIODES					
TLL149FB	TLL149FBP	Flood beam	1		
	Raw lume	n output: 2400 lm			
	Effective lun	nen output: 1680 lm			
MATERIALS	Polycarbonate le	ns, aluminum housing			
VOLT/AMP	13.5V at 2.05A±	0.18A, 28V at 0.97A±0.08A			
WT/DIMS	0.95 lbs. / 6.625"	x 3.5" x 2.665"			
WARRANTY	Lifetime LED Wa	rranty			

IP69K RATING

Highest designation available for water ingress testing, offering increased reliability and service life when subjected to severe environmental conditions or cleaning methods.

















TLL30 SERIES Opti-Brite™ LED Work Light

- Compact design only 3.25" diameter
- Die cast aluminum housing with powder coat finish
- Stainless steel hardware
- 16-gauge, 20" lead and ground wire; IP69K rating

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	FLOOD BI	EAM - 4 DIODES	
TLL30FB	TLL30FBP	Flood beam	1t
	Raw lume	n output: 960 lm	
	Effective lur	men output: 670 lm	
MATERIALS	Polycarbonate le	ns, aluminum housing	
VOLT/AMP	12.8VDC - 0.75A	, 24.0VDC - 0.37A	
WT/DIMS	1.468 lbs. / 3.27"	x 5.70" x 2.36"	
WARRANTY	Lifetime LED Wa	rranty	

IP69K RATING


Highest designation available for water ingress testing, offering increased reliability and service life when subjected to severe environmental conditions or cleaning methods.

TLL44/45 SERIES Opti-Brite™ LED Work Lights

- Heavy duty design with powder coated, die cast aluminum housing and polycarbonate lens
- Low profile design only 2 inches deep
- Dual power: use with 12VDC and 24VDC systems
- Stainless steel mounting hardware
- 14-gauge, 10" lead and ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
F	ROUND LED WO	ORK LIGHT - 6 DIODES			
TLL44FB	TLL44FBP	Flood beam	2		
		RETAIL			
TLL144FSL	Retail Ready	Flood beam, window box	3		
	Raw lume	n output: 1200 lm			
	Effective lumen output: 720 lm				
MATERIALS	Dolyaarhanata la	no oluminum housing			
WATERIALS	Polycarbonate le	ns, aluminum housing			
VOLT/AMP 12.8VDC - 1.1A, 24.0VDC - 0.48A					
WT/DIMS	WT/DIMS 0.98 lbs. / 4" x 6.281" x 2.375"				
WARRANTY	Lifetime LED Wa	rranty			





BULK P/N	POLYPACK P/N	DESCRIPTION	QTY				
ROUND LED WORK LIGHT - 8 DIODES							
TLL45FB	TLL45FBP	Flood beam	3				
Raw lumen output: 1600 lm							
Effective lumen output: 897 lm							
MATERIALS	Polycarbonate le	ns, aluminum housing					
VOLT/AMP	OLT/AMP 12.8VDC - 1.38A, 24.0VDC - 0.65A						
WT/DIMS	1.389 lbs. / 4.5" x 7" x 2"						
WARRANTY	Lifetime LED Wa	rranty					















TLL46 SERIES

Opti-Brite[™] LED Work Lights

- Heavy duty design with powder coated, die cast aluminum housing and polycarbonate lens
- Low profile design less than 2.5 inches deep
- Dual power: use with 12VDC and 24VDC systems
- Stainless steel mounting hardware
- 14-gauge, 10" lead and ground wire

200					
BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
FLOOD BEAM - 9 DIODES					
TLL46CFB	TLL46CFBP	Flood beam	3		
Raw lumen output: 2160 lm					
Effective lumen output: 1492 lm					
MATERIALS	Polycarbonate I	ens, aluminum housing			
VOLT/AMP	12.8VDC - 1.70A, 24.0VDC - 1.0A				
WT/DIMS	1.764 lbs. / 5" x 7" x 2.375"				
WARRANTY	Lifetime LED Warranty				
BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
TRAPEZOID BEAM - 9 DIODES					
TLL46TB	TLL46TBP	Trapezoid beam	3		
Raw lumen output: 1800 lm Effective lumen output: 707 lm					

Polycarbonate lens, aluminum housing

12.8VDC - 1.50A, 24.0VDC - 0.73A

1.764 lbs. / 5" x 7" x 2.375"

Lifetime LED Warranty


IP69K RATING Highest designation

MATERIALS

VOLT/AMP

WARRANTY

WT/DIMS



available for water ingress testing, offering increased reliability and service life when subjected to severe environmental conditions or cleaning methods.

TLL48 SERIES


Opti-Brite™ LED Work Light

- Heavy duty design with powder coated, die cast aluminum housing and polycarbonate lens
- Low profile design less than 2.5 inches deep
- Dual power: use with 12VDC and 24VDC systems
- Stainless steel mounting hardware
- 14-gauge, 10" lead and ground wire; IP69K rating

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY			
FLOOD BEAM - 6 DIODES						
TLL48FB	TLL48FBP	Flood beam	5			
Raw lumen output: 1200 lm Effective lumen output: 617 lm						
MATERIALS Polycarbonate lens, aluminum housing VOLT/AMP 12.8VDC - 1.52A, 24.0VDC - 0.65A WT/DIMS 1.14 lbs. / 4.15" x 6.375" x 2.14" WARRANTY Lifetime LED Warranty						



Opti-Brite



Opti-Brite

TLL50 SERIES

Opti-Brite™ LED Work Light

- Lightweight, compact LED work light
- Corrosion proof housing and polycarbonate lens
- Dual power: use with 12VDC and 24VDC systems
- 22-gauge, 10" lead and ground wire
- IP69K rating


IFOSKI	aurig				
BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		TLL50FB
	FLOOD BI	EAM - 9 DIODES		33 1	
TLL50FB	TLL50FBP	Flood beam	3		
		RETAIL			
TLL150FSL	Retail Ready	Flood beam, window box	х 3		
	Raw lume	n output: 324 lm			CED
	Effective lur	nen output: 252 lm			United States
MATERIALS	Polycarbonate le	ns and housing.	4 15/16"	2 3/8"	
	stainless steel ha	rdware			LED METHO
VOLT/AMP	12.8VDC - 1.50A	., 24.0VDC - 0.73A	(2*		RURIVERS
WT/DIMS	1 lbs. / 4.938" x 6	5.938" x 2.375"			UTILITY and WORK LIGHT
WARRANTY	Lifetime LED Wa	rranty		5 3/4"	
			6 15	/16"	TLL150FSL











TLL51 SERIES

Opti-Brite™ LED Work Light

- Heavy duty design with powder coated, die cast aluminum housing and polycarbonate lens
- Compact design only 2 inches square
- Dual power: use with 12VDC and 24VDC systems
- Stainless steel mounting hardware
- 14-gauge, 10" lead and ground wire; IP69K rating

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
	FLOOD I	BEAM - 1 DIODE			
TLL51FB	TLL51FBP	Flood beam	10		
TLL51FRPG	TLL51FRPGP	Flood beam, .180 male bullet on power, ring terminal on ground	10		
Raw lumen output: 800 lm					
	Effective lu	men output: 549 lm			
MATERIALS	Polycarbonate le	ns, aluminum housing			
VOLT/AMP 12.8VDC - 0.91A, 24.0VDC - 0.42A					
WT/DIMS	0.37 lbs. / 2" x 3"	x 2.5"			
WARRANTY	Lifetime LED Wa	rranty			








TLL52 SERIES

Opti-Brite™ LED Work Light

- Heavy duty design with powder coated, die cast aluminum housing and polycarbonate lens
- Compact design only 2.75 inches square
- Dual power: use with 12VDC and 24VDC systems
- Stainless steel mounting hardware
- 14-gauge, 10" lead and ground wire; IP69K rating

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	FLOOD B	BEAM - 3 DIODES	
TLL52FB	TLL52FBP	Flood beam, black housing	10
TLL52FWB	TLL52FWBP	Flood beam, white housing	10
		RETAIL	
TLL152FSL	Retail Ready	Flood beam, window box	3
	_		

Raw lumen output: 600 lm Effective lumen output: 325 lm



MATERIALS	Polycarbonate lens and housing, stainless steel hardware
VOLT/AMP	12.8VDC - 1.50A, 24.0VDC - 0.73A
WT/DIMS	.38 lbs. / 2.75" x 5.171" x 1.687"
WARRANTY	Lifetime LED Warranty

TLL152FSI

TLL54 SERIES


Opti-Brite™ LED Work Light

- Heavy duty design with powder coated, die cast aluminum housing and polycarbonate lens
- Low profile design less than 2.5 inches deep
- Dual power: use with 12VDC and 24VDC systems
- Stainless steel mounting hardware
- 14-gauge, 10" lead and ground wire; IP69K rating

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
	SPOT BE	AM - 9 DIODES			
TLL54TB	TLL54TBP	Spot beam	5		
Raw lumen output: 1800 lm Effective lumen output: 900 lm					
MATERIALS Polycarbonate lens, aluminum housing					
VOLT/AMP	P 12.8VDC - 1.50A, 24.0VDC - 0.73A				
WT/DIMS	WT/DIMS 1.51 lbs. / 5" x 7" x 2.375"				
WARRANTY	Lifetime LED Wa	rranty			







TLL55 SERIES

Opti-Brite™ LED Work Light



- Contoured lens for wide angle beam
- Die cast aluminum housing with powder coat finish
- Stainless steel hardware
- 14-gauge, 10" lead and ground wire; IP69K rating

BULK P/N	POLYPACK P/N	DESCRIPTION		QTY
	FLOOD B	EAM - 9 DIODE	S	
TLL55FB	TLL55FBP	Flood beam		1
	Raw lume	n output: 2160 lr	m	
Effective lumen output: 1512 lm				
MATERIALS	Polycarbonate le	ns, aluminum hous	sing	
VOLT/AMP	12.8VDC - 1.50A	, 24.0VDC - 0.73A		
WT/DIMS	1.35 lbs. / 4.87" x	x 6.90" x 2.03"		
WARRANTY	Lifetime LED Wa	rranty		















TLL56/57 SERIES Opti-Brite™ LED Work Lights

- Heavy duty design with powder coated, die cast aluminum housing and polycarbonate lens
- Dual power: use with 12VDC and 24VDC systems
- Stainless steel mounting hardware
- 16-gauge, 20" lead and ground wire; IP69K rating

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	FLOOD B	EAM - 8 DIODES		
TLL56FB	TLL56FBP	Flood beam	2	
TLL57FB	TLL57FBP	Flood beam, shock mount	2	
	Raw lume	n output: 4000 lm		
Effective lumen output: 2800 lm				
MATERIALS	MATERIALS Polycarbonate lens, aluminum housing			
VOLT/AMP	VOLT/AMP 12.8VDC - 5.0A, 24.0VDC - 2.5A			
WT/DIMS	WT/DIMS 3.53 lbs. / 7.161" x 9" x 4.313"			
WARRANTY Lifetime LED Warranty				







TLL60 SERIES Opti-Brite™ LED Work Light

- Heavy duty design with powder coated, die cast aluminum housing and polycarbonate lens
- Rectangular design 6 inches wide by 2 inches high
- Dual power: use with 12VDC and 24VDC systems
- Stainless steel mounting hardware
- 14-gauge, 10" lead and ground wire; IP69K rating

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY			
	FLOOD BEAM - 6 DIODES					
TLL60FB	TLL60FBP	Flood beam	5			
	Raw lumen output: 1200 lm Effective lumen output: 720 lm					
MATERIALS Polycarbonate lens, aluminum housing VOLT/AMP 12.8VDC - 1.1A, 24.0VDC - 0.48A WT/DIMS 0.95 lbs. / 6" x 4.5" x 2.4" WARRANTY Lifetime LED Warranty						

TLL64 SERIES


Opti-Brite™ LED Work Light

- Heavy duty design with powder coated, die cast aluminum housing and polycarbonate lens
- Ultrabright output in standard size light 2240 lumens
- Dual power: use with 12VDC and 24VDC systems
- Stainless steel mounting hardware
- 14-gauge, 10" lead and ground wire; IP69K rating

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
	FLOOD BEAM - 4 DIODES				
TLL64FB	TLL64FBP	Flood beam	2		
Raw lumen output: 3200 lm Effective lumen output: 2240 lm					
MATERIALS Polycarbonate lens, aluminum housing					
VOLT/AMP	12.8VDC - 3.16A, 24.0VDC - 1.41A				
WT/DIMS	WT/DIMS 1.41 lbs. / 4.187" x 6.5" x 3"				
WARRANTY	Lifetime LED Wa	rranty			







TLL70 SERIES

Opti-Brite™ LED Work Light



- Contoured lens for wide angle beam
- Heavy duty design with powder coated, die cast aluminum housing and polycarbonate lens
- Ultrabright output in standard size light 3360 lumens
- Dual power: use with 12VDC and 24VDC systems
- Stainless steel mounting hardware
- 14-gauge, 10" lead and ground wire; IP69K rating

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
FLOOD BEAM - 6 DIODES				
TLL70FB	TLL70FBP	Flood beam	2	
	Raw lume	n output: 4800 lm		
Effective lumen output: 3360 lm				
MATERIALS	ERIALS Polycarbonate lens, aluminum housing			
VOLT/AMP	12.8VDC - 2.8A, 24.0VDC - 1.43A			
WT/DIMS	1.41 lbs. / 5" x 4.375" x 2.625"			
WARRANTY	Lifetime LED Warranty			











TLL71 SERIES Opti-Brite™ LED Work Light

- Contoured lens for wide angle beam
- Heavy duty design with powder coated, die cast aluminum housing and polycarbonate lens
- Dual power: use with 12VDC and 24VDC systems
- Stainless steel mounting hardware
- 14-gauge, 10" lead and ground wire; IP69K rating

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	FLOOD BI	EAM - 9 DIODES		
TLL71FB	TLL71FBP	Flood beam	2	
	Raw lume	n output: 2160 lm		
Effective lumen output: 1492 lm				
MATERIALS	Polycarbonate le	ns, aluminum housing		
VOLT/AMP	12.8VDC - 1.43A	, 24.0VDC - 0.66A		
WT/DIMS	1.41 lbs / 4" x 5"	x 2.25"		
WARRANTY	Lifetime LED Wa	rranty		





TLL72 SERIES

Opti-Brite[™] LED Work Light

- · Contoured lens for wide angle beam
- Heavy duty design with powder coated, die cast aluminum housing and polycarbonate lens
- Dual power: use with 12VDC and 24VDC systems
- Stainless steel mounting hardware
- 14-gauge, 10" lead and ground wire; IP69K rating

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
	FLOOD BE	AM - 9 DIODES			
TLL72FB	TLL72FBP	Flood beam	2		
	Raw lumen output: 2160 lm Effective lumen output: 1492 lm				
MATERIALS VOLT/AMP WT/DIMS WARRANTY	•	· / = .= ·			


5 13/16

TLL73 SERIES

Opti-Brite[™] LED Work Light

- Heavy duty design with powder coated, die cast aluminum housing and polycarbonate lens
- Dual power: use with 12VDC and 24VDC systems
- Stainless steel mounting hardware; built in handle
- 14-gauge, 10" lead and ground wire; IP69K rating

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
FLOOD BEAM - 9 DIODES					
TLL73FB	TLL73FBP	Flood beam	3		
	Raw lume	n output: 2160 lm			
Effective lumen output: 1492 lm			1		
MATERIALS Polycarbonate lens, aluminum housing					
VOLT/AMP	MP 12.8VDC - 1.48A, 24.0VDC - 0.7A				
WT/DIMS	WT/DIMS 1.61 lbs / 5" x 7.5" x 3.25"				
WARRANTY	Lifetime LED Wa	rranty			














TLL80 SERIES

Opti-Brite™ LED Mini Flood Light

- Coated die cast aluminum housing, polycarbonate lens
- Compact design only 3 inches wide by 2 inches high
- Bright white SMD diodes for bright, dependable light

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	FLOOD B	EAM - 6 DIODES	
TLL80FB	TLL80FBP	Flood beam, black housing	5
		en output: 270 lm men output: 150 lm	





MATERIALS Polycarbonate lens, aluminum housing

 VOLT/AMP
 12.8VDC - .19A

 WT/DIMS
 .7 lbs. / 3" x 2" x 1.563"

 WARRANTY
 Lifetime LED Warranty






DLL25/50 SERIES LED Docking/Utility Lights

- Wide, low beam ideal for docking or loading applications
- Die cast aluminum housing coated for protection against corrosion and UV exposure; durable polycarbonate lens
- Sealed lens, gasket at wire entry; IP44 rating
- Dual power: use with 12VDC and 24VDC systems
- Stainless steel mounting hardware
- 20-gauge lead and ground wire with tinned ends

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	DOCKING/UTI	LITY LIGHTS - 2 DIODES	
DLL50CB	DLL50CBP	Black housing	10
		RETAIL	
TLL25FS	Retail Ready	Black housing, clam	3
DLL50CC	Keldil Keddy	Pair of lights, black housing, box	3

Raw lumen output: 440 lm Effective lumen output: 396 lm



MATERIALS Polycarbonate lens, aluminum housing

VOLT/AMP 12.8/24.0VDC - 0.683A

WT/DIMS DLL50CB: 1.23 lbs. / 5" x 4" x 3.5" DLL50CC: 3.00 lbs. / 5" x 4" x 3.5"

WARRANTY Lifetime LED Warranty

UCL20 SERIES

22" LED Spot/Flood Light Bar



- Heavy duty aluminum housing and polycarbonate lens
- Dual power: use with 12VDC and 24VDC systems
- IP65 rated for dust and water resistance
- · Hard wired
- Supplied in color retail window box







BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	FLOOD BE	AM - 40 DIODES	
UCL20CB	-	Spot/flood beam	1
	ACC	ESSORIES	
BK20BB	-	Mounting bracket kit	20
	Raw lume	n output: 7500 lm	
	Effective lun	nen output: 4521 lm	
MATERIALS	Die Cast Aluminu and Polycarbona	ım with Powder Coat Finish Housin te Lens	g
VOLT/AMP	12.8VDC - 6.8A/	24VDC - 3.1A	
WT/DIMS	4.8 lbs / 21.26" x	3.07" x 3.39"	
WARRANTY	Lifetime LED Wa	rranty	















UCL21 SERIES

13" LED Spot/Flood Light Bar

- Heavy duty aluminum housing and polycarbonate lens
- Dual power: use with 12VDC and 24VDC systems
- IP65 rated for dust and water resistance
- Hard wired
- Supplied in color retail window box

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	FLOOD BE	AM - 24 DIODES	
UCL21CB	-	Spot/flood beam	1
	ACC	ESSORIES	
BK20BB	-	Mounting bracket kit	20
	Raw lume	n output: 3700 lm	
	Effective lun	nen output: 2717 lm	
MATERIALS	Die Cast Aluminu and Polycarbona	ım with Powder Coat Finish Housin te Lens	g
VOLT/AMP	12.8VDC - 4A / 2	4VDC - 1.8A	
WT/DIMS	3.19 lbs / 13.58"	x 3.15" x 3.46"	
WARRANTY	Lifetime LED Wa	rranty	

UCL22 SERIES

33" LED Spot/Flood Light Bar





- Heavy duty aluminum housing and polycarbonate lens
- Dual power: use with 12VDC and 24VDC systems
- IP65 rated for dust and water resistance
- Hard wired
- Supplied in color retail window box





BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	FLOOD BE	AM - 60 DIODES	
UCL22CB	-	Spot/flood beam	1
	ACC	ESSORIES	
BK20BB	-	Mounting bracket kit	20
	Raw lumen	output: 12,600 lm	
	Effective lun	nen output: 6777 lm	
MATERIALS		ım with Powder Coat Finish Ho	ousing
	and Polycarbona	te relis	
VOLT/AMP	12VDC - 9.8A / 2	4VDC - 5.7A	
WT/DIMS	5.625 lbs / 33" x	3.15" x 3.46"	
WARRANTY	Lifetime LED Wa	rranty	



BK20BB







UCL23 SERIES

9" LED Spot/Flood Light Bar



- Heavy duty aluminum housing and polycarbonate lens
- Dual power: use with 12VDC and 24VDC systems
- IP65 rated for dust and water resistance
- Hard wired, 16-in leads
- Supplied in color retail window box



UCL23CB



BK20BB

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	FLOOD BE	AM - 12 DIODES	
UCL23CB	-	Spot/flood beam	1
	ACC	ESSORIES	
BK20BB	-	Mounting bracket kit	20
	Raw lume	n output: 2520 lm	
	Effective lumen output: 1550 lm		
/			
MATERIALS	Die Cast Aluminu and Polycarbona	ım with Powder Coat Finish Hous te Lens	ing
VOLT/AMP	12.8VDC - 3A / 2	4VDC - 1.5A	
WT/DIMS	2.4 lbs / 7.25" x 3	3" x 3.5"	
WARRANTY	Lifetime LED Wa	rranty	



UCL24 SERIES

3" LED Flood Lights

- 3" cube design fits many applications
- Post mount and recess flange mount models available
- Heavy duty aluminum housing and impact resistant polycarbonate lens
- IP65 rated for dust and water resistance
- Hard wired, 16" leads
- Packaged in full color retail box

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	FLOOD B	EAM - 6 DIODES	
UCL24CB	-	Flood beam, post mount	1
UCL24CFB	-	Flood beam, flange mount	1
		n output: 1800 lm men output: 780 lm	

MATERIALS	Die Cast Aluminum with Powder Coat Finish Housing and Polycarbonate Lens
VOLT/AMP	12.8VDC - 1.4A
WT/DIMS	Post: 1.2 lbs 3.25" x 3" x 2.75"
	Recess Flange: 1.2 lb / 4.25" x 3.625" x 2.75"
WARRANTY	Lifetime LED Warranty







UCL24CB





UCL24CFB



UCL24CB



UCL24CFB





UCL25 SERIES

50" LED Spot/Flood Light Bar





WT/DIMS


WARRANTY

- Heavy duty aluminum housing and polycarbonate lens
- Dual power use with 12VDC and 24VDC systems
- IP65 rated for dust and water resistance
- Hard wired
- Supplied in color retail window box



BK20BB

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	FLOOD BE	AM - 96 DIODES	
UCL25CB	-	Spot/flood beam	1
	ACC	ESSORIES	
BK20BB	-	Mounting bracket kit	20
	Raw lumen	output: 20,000 lm	
	Effective lum	en output: 11,600 lm	
MATERIALS	Die Cast Aluminu and Polycarbona	ım with Powder Coat Finish Hete Lens	ousing
VOLT/AMP	12.8VDC - 22.9A	./ 24VDC - 11.9A	

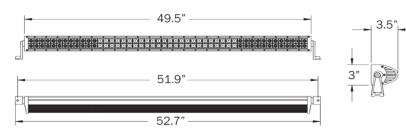

8.1 lbs. / 50" x 3" x 3.5"

Lifetime LED Warranty

UCL32 SERIES

30" LED Light Bar with Supplemental Turn Function





- Central white LEDs produce bright flood beam, red LEDs on left and right ends provide supplemental turn function (rear facing)
- White LEDs emit 6000K daylight white beam
- Dual power: use with 12VDC and 24VDC systems
- Heavy duty aluminum housing and polycarbonate lens
- Adjustable, sliding brackets for mounting versatility
- IP65 rated for dust and water resistance
- Hard wired with 24-in. leads (4-wire)
- Stainless steel mounting hardware

DESCRIPTION	QTY
FLOOD BEAM - 96 DIODES	
White flood beam, red supplemental turn	1
ACCESSORIES	
Mounting bracket kit	3
Raw lumen output: 7200 lm	
Effective lumen output: 4000 lm	
Die Cast Aluminum with Powder Coat Finish Housing and Polycarbonate Lens	g
12.8VDC - 6.8A / 24VDC - 3.1A	
4.8 lbs / 29.6" x 2.3" x 2.875"	
Lifetime LED Warranty	
	FLOOD BEAM - 96 DIODES White flood beam, red supplemental turn ACCESSORIES Mounting bracket kit Raw lumen output: 7200 lm Effective lumen output: 4000 lm Die Cast Aluminum with Powder Coat Finish Housing and Polycarbonate Lens 12.8VDC - 6.8A / 24VDC - 3.1A 4.8 lbs / 29.6" x 2.3" x 2.875"



BK21BB







ST45 SERIES

4" Round Sealed Lights


- Sonically sealed, waterproof
- Shock-proof socket guarantees long bulb life
- Accepts standard PL-3 plug
- Kits include grommet and plug

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	RED ST	OP/TURN/TAIL LIGHTS	
ST45RB	ST45RBP	Light with PL-3 connection	50
ST44RB	ST44RBP	Kit: ST45RB, A45GB & A45PB	10
ST45RGB	ST45RGBP	Light with male pin connection	50
ST46RB	ST46RBP	Light with reflex lens, PL-3 connection	50
	YELLOW P	ARKING/TURN SIGNALS	
ST45AB	ST45ABP	Light	50
ST44AB	ST44ABP	Kit: ST45AB, A45GB & A45PB	10
		ACCESSORIES	
A45GB	A45GBP	Grommet	50
A45PB	A45PBP	Pigtail, 3-wire	100
A47PB	A47PBP	Right angle pigtail, 3-wire	100
BK45BB	BK45BBP	Black steel bracket	10
		RETAIL	
ST45RK	Retail Ready	Kit: ST45RB, A45GB & A45PB, clam	6
ST45RS	Keddy	Light only, clam	6



ST45RGB male pin connection detail

FMVSS	ST45RB: STIP2	
	ST45AB: IPP2	
	ST46RB: STIP2A	
MATERIALS	Polycarbonate lens and housing	
VOLT/AMP	12.8VDC - 2.4A Stop/Turn, 0.49A Tail/Parking	
WT/DIMS	ST45/46: .221 lbs. / 4.25" x 4.25" x 2.063"	
WARRANTY	Three Year Warranty	



ST45AB/RB & 46RB

HOLE CUT-OUT:

SEALED STOP/TURN/TAIL & PARKING/TURN SIGNALS

ST47 Series

4" Flange Mount Stop/Turn/Tail Light

- Sonically sealed, waterproof
- Shock-proof socket guarantees long bulb life


PACK P/N DE	SCRIPTION	QTY			
RED STOP/TURN/TAIL LIGHT					
RBP Fla	ange mount, PL-3 connection, gray	50			
RKBP Ki	t: ST47RB & A45PB	10			
ACCE	ESSORIES				
BP Pi	gtail, 3-wire	100			
BP Ri	ght angle pigtail, 3-wire	100			
	RED STOP/T RBP Fla RKBP Ki ACCE BP Pi	RED STOP/TURN/TAIL LIGHT RBP Flange mount, PL-3 connection, gray RKBP Kit: ST47RB & A45PB ACCESSORIES BP Pigtail, 3-wire			

FMVSS	STIP2
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 2.4A Stop/Turn, .49A Tail
WT/DIMS	.617 lbs. / 5.50" x 5.50" x 2"
WARRANTY	Three Year Warranty





ST47RB



HOLE CUT-OUT: 4.5"

Gptronics



ST70RB

ST70/75 SERIES6" Oval Sealed Lights

- Sonically sealed, waterproof
- Shock-proof socket guarantees long bulb life
- Accepts standard PL-3 plug
- Kits include grommet and plug




ST70RBTK



ST70AB



ST75AB



)2	 2 5/16" ↓
-	— 6	1/2"	<u> </u>	→	Ť
				=	2 3/4" <u>↓</u>
		ST75	АВ		

HOLE CUT-OUT: 6.85" X 2.5" (1.25" R)

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	RED STO	DP/TURN/TAIL LIGHTS	
ST70RB	ST70RBP	Light	50
ST74RB	ST74RBP	Kit: ST70RB, A70GB & A45PB	50
ST70RBTK	ST70RBTKP	ST70RB light sealed to bracket	30
ST64RB	ST64RBP	Kit: ST70RB, A70GB & A47PB (plug attached to light)	50
ST65RB	ST65RBP	Kit: ST70RB, A70GB & A47PB	50
	YELLO	OW SIGNAL LIGHTS	
ST70AB	ST70ABP	Parking/turn signal	50
ST74AB	ST74ABP	Kit: ST70AB, A70GB & A45PB	50
ST75AB	ST75ABP	Mid-ship turn signal/marker	50
ST77AB	ST77ABP	Kit: ST75AB, A70GB & A45PB	50
	Į.	ACCESSORIES	
A70GB	A70GBP	Grommet	50
A45PB	A45PBP	Pigtail, 3-wire	100
A47PB	A47PBP	Right angle pigtail, 3-wire	100
BK70BB	BK70BBP	Black steel bracket	10
		RETAIL	
ST70RK	Retail Ready	Kit: ST70RB, A70GB & A45PB, clam	6
ST70RS	Keloli Keloy	Red light only, clam	6
ST70AS		Yellow light only, clam	6
ST75AS		Yellow mid-ship turn signal/marker, clam	6

FMVSS	ST70RB: STIP2
	ST70AB: IPP2
	ST75AB: E P2 A
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 2.4A Stop/Turn, 0.50A Tail/Parking
WT/DIMS	ST70: .265 lb. / 6.5" x 2.313" x 2.375"
	ST75: .221 lbs. / 6.5" x 2.313" x 2.75"
WARRANTY	Three Year Warranty




ST33 SERIES

Rectangular Sealed Lights

- Sonically sealed, waterproof
- Shock-proof socket guarantees long bulb life
- Accepts standard PL-3 plug
- Kits include grommet and plug

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
RED STOP/TURN/TAIL LIGHTS			
ST33RB	ST33RBP	Light	10
ST34RB	ST34RBP	Kit: ST33RB, A33GB & A47PB	50
	YELLOW	PARKING/TURN LIGHTS	
ST33AB	ST33ABP	Light	10
		ACCESSORIES	
A33GB	A33GBP	Grommet	50
A45PB	A45PBP	Pigtail, 3-wire	100
A47PB	A47PBP	Right angle pigtail, 3-wire	100

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY			
	RED STOP/TURN/TAIL LIGHTS					
ST33RB	ST33RBP	Light	10			
ST34RB	ST34RBP	Kit: ST33RB, A33GB & A47PB	50			
	YELLOW	PARKING/TURN LIGHTS				
ST33AB	ST33ABP	Light	10			
		ACCESSORIES				
A33GB	A33GBP	Grommet	50			
A45PB	A45PBP	Pigtail, 3-wire	100			
A47PB	A47PBP	Right angle pigtail, 3-wire	100			

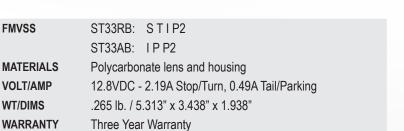






ST33RB



3 7/16"



HOLE CUT-OUT: 5.453" X 3.578" (1" R)

optronics







ST42RB




ST40/42 SERIESFlush Mount Stop/Turn/Tail Lights

- Flush mount with acrylic lens, steel housing, gasket
- Replaceable lens and bulb
- Shock-proof socket guarantees long bulb life
- Hard wired

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	RED STOP	/TURN/TAIL LIGHTS		
ST40RB	ST40RBP	Light, self grounding	50	
ST42RB	ST42RBP	Light with reflex, ground wire	50	
	AC	CESSORIES		
A40SRB	A40SRBP	Snap-in lens retention ring	100	
A40RB	A40RBP	Red lens	25	
A42GB	A42GBP	Gasket for flange	100	
A43RB	A43RB	Red lens with reflex	25	
A2057B	A2057BP	2057 bulb	50	
RETAIL				
ST40RS	Retail Ready	Light, clam	6	

FMVSS	ST40: STI
	ST42: AIST
MATERIALS	Acrylic lens, steel housing
VOLT/AMP	12.8VDC - 2.4A Stop/Turn, 0.49A Tail/Parking
WT/DIMS	.221 lbs. / 5.375" x 5.375" x 1.563"
WARRANTY	Three Year Warranty



COMBINATION TAIL LIGHTS & KITS


ST90 SERIES

7" Transit Lights for Surface Mount


- Screw-on lens, easy to change bulb
- Surface mount on 6-1/4" centers
- · Grounds through mounting hardware
- Acrylic lens, steel base plate


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
RED STOP/TAIL LIGHTS			
ST90RB	ST90RBP	Light, 1157 bulb	5
	YELL	OW TURN SIGNAL	
ST90AB	ST90ABP	Light, 1156 bulb	5
		ACCESSORIES	
A90RB	A90RBP	Red lens	5
A90AB	A90ABP	Yellow lens	5
A1157B	A1157BP	1157 replacement bulb	50

FMVSS	Red: S T I, Yellow: I
MATERIALS	Acrylic lens and steel housing
VOLT/AMP	12.8VDC - 2.4A Stop, 0.5A Tail/Parking
WT/DIMS	1.146 lbs. / 7.125" x 7.125" x 2.188"
WARRANTY	Three Year Warranty









optronics



ST92RB



ST92 SERIES

7" Transit Warning Lights for Surface Mount

- School bus warning lamps
- Screw-on lens, easy to change halogen bulb
- Hard wired, includes lead and ground wire
- Acrylic lens, steel base plate

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY			
	RED WARNING LIGHT					
ST92RB	ST92RBP	Warning light	5			
	YELLO	OW WARNING LIGHT				
ST92AB	ST92ABP	Warning light	5			
		ACCESSORIES				
A94VB	A94VBP	Black visor	25			
RETAIL						
A700	Retail Ready	12V H3 55W replacement bulb, clam	12			




FMVSS W W2


MATERIALS Acrylic lens and steel housing

12.8VDC - 4.6A **VOLT/AMP**

1.146 lbs. / 7.063" x 7.063" x 2.25" WT/DIMS

WARRANTY Three Year Warranty







ST51/52/53 SERIES Pedestal Mount Lights

- Snap-on lens, easy to change bulb
- ST51/52 mount with single post and are self grounding; ST53 with dual post mounts on 2" centers and includes ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
RED - SINGLE FACE			
ST51RB	ST51RBP	Round, red, single face	10
	YEL	LOW - DUAL FACE	
-	ST52AAP	Round, yellow, dual face	10
ST53AAB	ST53AABP	Square, yellow dual face with side marker/reflex, 1156 bulb	10
	RED/YE	LLOW DUAL FACE	
ST52RB	ST52RBP	Dual face yellow/red stop/turn/tail light	10
		ACCESSORIES	
A52RB	A52RBP	Red lens, round	25
A52AB	A52ABP	Yellow lens, round	25
A2057B	A2057BP	2057 replacement bulb	50
RETAIL			
ST51RS		Red stop/turn/tail light, clam	6
ST52AA	Retail Ready	Dual yellow/yellow parking/turn, clam	6
ST52RA		Dual yellow/red stop/turn/tail light, clam	6
FMVSS	ST51/52:	STI	
	ST53AA:	Tail: S T I P, Side marker/reflex: P2 A	
MATERIALS	ST51/52:	Acrylic lens and plastic housing	
	ST53AA:	Acrylic lens and plastic housing	
VOLT/AMP	ST51/52:	12.8VDC - 2.3A Stop/Turn, 1.2A Tail/Pa	•
WITIDING	ST53AA:	12.8VDC - 2.3A Stop/Turn, .248A Mark	er
WT/DIMS	ST51/52: ST53AA:	.463 lb. / 4.313" x 4.313" x 2.375"	
WARRANTY	0.00, 1	.794 lb. / 4.563" x 5" x 2.5" r Warranty	
WARRANTI	Tillee fea	i vvairaiity	
















Gptronics







ST24/25 SERIES

Stud Mount Stop/Turn/Tail Lights


- Snap-on lens, easy to change bulb
- Stud mount on 2" centers
- Grounds through mounting hardware
- · Acrylic lens, corrosion proof plastic housing
- Driver side light includes license illuminator


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	STO	P/TURN/TAIL LIGHTS	
ST24RB	ST24RBP	Passenger side light	50
ST25RB	ST25RBP	Driver side light with license illuminator	50
		ACCESSORIES	
A24RB	A24RBP	Red lens	25
A2057B	A2057BP	2057 replacement bulb	50
FMVSS MATERIAL VOLT/AMP WT/DIMS WARRANT	Acrylic ler 12.8VDC .309 lb. / 4	STIP, ST25RB: STIPL ns and plastic housing - 2.5A Stop/Turn, 1.0A Tail 4.313" x 4.313" x 3.375" ar Warranty	

Gatronics.









ST20/21 SERIES

Surface Mount Stop/Turn/Tail Lights

- Screw-on lens, easy to change bulb
- Surface mount on 2" centers
- · Grounds through mounting hardware
- Acrylic lens, steel housing
- Driver side light includes license illuminator

	•		
BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		RETAIL	
ST20RS		Passenger side, clam	6
ST21RS	Retail Ready	Driver side, clam	6
A20R		Red lens, slipover blister	12
	, , ,	ACCESSORIES	
A1157B	A1157BP	1157 replacement bulb	50
FMVSS MATERIALS VOLT/AMP WT/DIMS WARRANTY	Acrylic lens 12VDC - 2.	and steel housing 3A Stop/Turn, 0.90A Tail .875" x 3.875" x 3.063"	

ST8/9 SERIESUniversal Mount **Combination Tail Lights**

- Screw-on lens, easy to change bulbs
- Stud mount on 2" centers
- Grounds through mounting studs
- Shock-proof socket guarantees long bulb life
- Acrylic lens, corrosion proof plastic housing
- Passenger side light is 6-function: stop, turn, tail, rear reflex, side marker, and side reflex
- Driver side light also includes license illuminator
- Bulk models are designed with Plug-n-go connections for quick connect wiring
- Retail models are hard wired, self grounding

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	STOF	P/TURN/TAIL LIGHTS	
ST8RB	ST8RBP	Passenger side light	50
ST9RB	ST9RBP	Driver side light with license illuminator	50
ST8RHB	ST8RHBP	Passenger side light, hard wired	50
ST9RHB	ST9RHBP	Driver side light, hard wired	50
TL27BK	-	Kit: ST8RB, ST9RB, (2) MC36AB amber marker lights with reflex, LP10SB license plate bracket; 20-ft harness, box	1
TL29BK	-	Kit: ST8RB, ST9RB, (2) MC36AB amber marker lights with reflex, LP10SB license plate bracket; 25-ft harness, box	1
		ACCESSORIES	
A8RB	A8RBP	Tail light lens	50
A9RB	A9RBP	Side marker light lens	50
A1157B	A1157BP	1157 replacement bulb	50
		RETAIL	
ST8RS		Passenger side light, clam	6
ST9RS	_	Driver side with license illuminator, clam	6
TL11RK	Retail Ready	Kit: ST8RB, ST9RB, license plate bracket, 20-ft harness, mounting hardware, clam	3
TL8RK		Kit: ST8RB, ST9RB, license plate bracket, 20-ft harness, mounting hardware, clam	2
A8RK		Tail and side marker lens set, clam	12
A8R		Tail light lens, clam	12
A9R		Side marker light lens, clam	12
FMVSS	CTQDD: A	. S T, A P2, ST9RB: A S T, A P2, L	
MATERIAL		ns and plastic housing	
VOLT/AMP	•	- 2.5A Stop/Turn, 1.0A Tail	
WT/DIMS		4.563" x 4.563" x 2.875"	
WARRANT		ar Warranty	
***************************************		ar Trainanty	





ST9RB




ST8RB



TL8RK







optronics



ST7RB




ST6RB



TL5RK





ST6/7 SERIESSubmersible Universal Mount **Combination Tail Lights**

- Submersible design suitable for many applications
- Screw-on lens, easy to change bulbs
- Stud mount on 2" centers
- Grounds through mounting studs
- Shock-proof socket guarantees long bulb life
- Acrylic lens, corrosion proof plastic housing
- Passenger side light is 6-function: stop, turn, tail, rear reflex, side marker, and side reflex
- Driver side light also includes license illuminator

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	STO	P/TURN/TAIL LIGHTS	
ST6RB	ST6RBP	Passenger side light	50
ST7RB	ST7RBP	Driver side light with license illuminator	50
ST6RPG	ST6RPGP	Passenger side light, 2-way plug	50
ST7RPG	ST7RPGP	Driver side light with license illuminator, 2-way plug	50
		ACCESSORIES	
A8RB	A8RBP	Tail light lens	50
A9RB	A9RBP	Side marker light lens	25
A1157B	A1157BP	1157 replacement bulb	50
		RETAIL	
ST6RS		Passenger side light, clam	6
ST7RS	Retail Ready	Driver side with license illuminator, clam	6
TL5RK		Deluxe kit: ST6RB, ST7RB, (2) MC36AB amber marker lights with reflex, LP10SB license plate bracket, 25-ft harness, mounting hardware, clam	2
TL14RK		Kit: ST6RB, ST7RB, (2) MC31AB amber marker lights with reflex, LP10SB license plate bracket, 25-ft. harness, mounting hardware, clam	2
TL9RK		Kit: ST6RB, ST7RB, LP10SB license plate bracket, 25-ft harness, mounting hardware, clam	2
A8RK		Tail and side marker lens set, clam	12
A8R		Tail light lens, clam	12
A9R		Side marker light lens, clam	12
FMVSS MATERIAL VOLT/AMP WT/DIMS WARRANT	S Acrylic ler 12.8VDC .309 lb. /	AS T, A P2, ST7RB: A S T, A P2, L ns and plastic housing - 2.5A Stop/Turn, 1.0A Tail 4.563" x 4.563" x 2.875" ar Warranty	

ST2/3 SERIES

Universal Mount Combination Tail Lights for Over 80" Applications

- Screw-on lens, easy to change bulbs
- Stud mount on 2" centers
- Grounds through mounting studs
- Shock-proof socket guarantees long bulb life
- Acrylic lens, corrosion proof plastic housing
- Passenger side light is 7-function: stop, turn, tail, rear clearance, rear reflex, side marker, and side reflex
- Driver side light also includes license illuminator
- Designed with Plug-n-go connections for quick connect wiring
- Also availabe in hard wired models

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	STOP/TURN/TAIL LIGHTS		
ST2RB	ST2RBP	Passenger side, quick connect	50
ST2RHB	ST2RHBP	Passenger side, hard wired	50
ST3RB	ST3RBP	Driver side with license illuminator, quick connect	50
ST3RHB	ST3RHBP	Driver side, hard wired	50
ACCESSORIES			
A8RB	A8RBP	Tail light lens	50
A2RB	A2RBP	Side marker light lens	25
A1157B	A1157BP	1157 replacement bulb	50

FMVSS	ST2RB: STIA, P2 PCA, ST3RB: STIA, P2 PCA, L
MATERIALS	Acrylic lens and plastic housing
VOLT/AMP	12.8VDC - 2.5A Stop/Turn, 1.0A Tail
WT/DIMS	.441 lb. / 6.125" x 4.563" x 2.875"
WARRANTY	Three Year Warranty






ST3RB



ST2RB



optronics



ST5RB





TL60RK

ST4/5 SERIES


Submersible Universal Mount Combination Tail Lights for Over 80" Applications

- · Submersible design suitable for many applications
- Screw-on lens, easy to change bulbs
- Stud mount on 2" centers
- Grounds through mounting studs
- Shock-proof socket guarantees long bulb life
- Acrylic lens, corrosion proof plastic housing
- Passenger side light is 7-function: stop, turn, tail, rear clearance, rear reflex, side marker, and side reflex
- Driver side light also includes license illuminator


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	STOP/TURN/TAIL LIGHTS			
ST4RB	ST4RBP	Passenger side light	50	
ST5RB	ST5RBP	Driver side light with license illuminator	50	
		ACCESSORIES		
A8RB	A8RBP	Tail light lens	50	
A2RB	A2RBP	Side marker light lens	25	
A1157B	A1157BP	1157 replacement bulb	50	
		RETAIL		
ST4RS		Passenger side light, clam	6	
ST5RS	Retail Ready	Driver side with license illuminator, clam	6	
TL60RK		Set: ST4RB, ST5RB, mounting hardware, clam	2	
A8R		Tail light lens, clam	12	

FMVSS	ST6RB: STIA, AP2, ST7RB: STIA, AP2, L
MATERIALS	Acrylic lens and plastic housing
VOLT/AMP	12.8VDC - 2.5A Stop/Turn, 1.0A Tail
WT/DIMS	.441 lb. / 6.125" x 4.563" x 2.875"

Three Year Warranty



WARRANTY



ST16/17 SERIES

Waterproof Universal Mount Combination Tail Lights

- · Waterproof, low profile design for marine applications
- Replaceable lenses and bulbs
- Mount on 2" centers

TL15RK

A16R

- · Includes separate ground wire with eyelet
- · Acrylic lens, corrosion proof plastic housing
- Passenger side light is 7-function: stop, turn, tail, rear clearance, rear reflex, side marker, and side reflex
- Driver side light also includes license illuminator






ST17RB



ST16RB

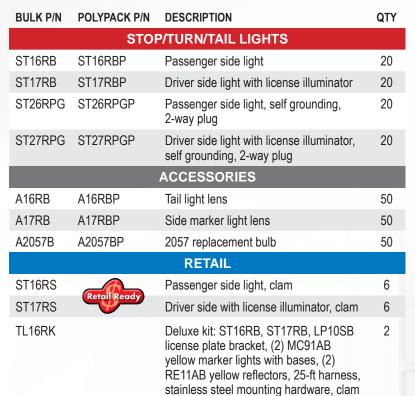

Kit: ST16RB, ST17RB, LP10SB license

plate bracket, 25-ft harness, mounting

2

12

FMVSS	ST16RB: STIAP2PC; ST17RB: STIAP2PC, L
MATERIALS	Acrylic lens and plastic housing
VOLT/AMP	12.8VDC - 2.3A Stop/Turn, 0.9A Tail
WT/DIMS	.661 lb. / 8.063" x 2.875" x 2.813"
WARRANTY	Three Year Warranty

hardware, clam


Tail light lens, clam



TL16RK



TL15RK



Gotronics



ST37RPG



ST36RPG




TL36RK

ST36/37 SERIES

Waterproof Universal Mount Combination Tail Lights

- Waterproof, low profile design for marine applications
- Screw-on lens, easy to change bulbs
- Mount on 2" centers
- Includes separate ground wire with eyelet
- · Shock-proof socket guarantees long bulb life
- Acrylic lens, corrosion proof plastic housing
- Passenger side light is 7-function: stop, turn, tail, rear clearance, rear reflex, side marker, and side reflex
- Driver side light also includes license illuminator
- Stainless steel mounting hardware

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	STOR	P/TURN/TAIL LIGHTS	
ST36RPG	ST36RPGP	Passenger side light, self grounding, 2-way plug	20
ST37RPG	ST37RPGP	Driver side light with license illuminator, self grounding, 2-way plug	20
		ACCESSORIES	
A39RB	A39RBP	Tail light lens	10
A37RB	A37RBP	Side marker light lens	50
A1157B	A1157BP	1157 replacement bulb	50
RETAIL			
ST36RS	Retail Ready	Passenger side light, clam	6
ST37RS	Name of the last o	Driver side with license illuminator, clam	6
TL36RK		Deluxe kit: ST36RB, ST37RB, LP10SB license plate bracket, (2) MC91AB yellow marker lights with bases, 25-ft harness, stainless steel mounting hardware, clam	2
A36R		Tail and marker light lenses, clam	12



FMVSS	ST36RB: S T I A P2, A P2; ST37RB: S T I A P2, A P2, L
MATERIALS	Acrylic lens and plastic housing
VOLT/AMP	12.8VDC - 2.3A Stop/Turn, 0.9A Tail
WT/DIMS	.992 lb. / 7.875" x 3.25" x 2.875"
WARRANTY	Three Year Warranty

COMBINATION TAIL LIGHTS & KITS

ST56/57 SERIES

Submersible Universal Mount Combination Tail Lights for Over 80" Applications

- Waterproof design for marine applications
- · Shock mount guarantees long bulb life
- Mount on 2" centers
- Includes separate ground wire with eyelet
- · Acrylic lens, corrosion proof plastic housing
- Passenger side light is 7-function: stop, turn, tail, rear clearance, rear reflex, side marker, and side reflex
- Driver side light also includes license illuminator
- Stainless steel mounting hardware

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
RETAIL				
ST56RS	Retail Ready	Passenger side light, clam	6	
ST57RS	Kerdinkeddy	Driver side with license illuminator, clam	6	
ACCESSORIES				
A2057B	A2057BP	2057 replacement bulb	50	
A194B	A194BP	194 replacement bulb	100	


FMVSS	ST56RB: S2 T2 I6 PC A; ST57RB: S2 T2 I6 PC A, L
MATERIALS	Acrylic lens and plastic housing
VOLT/AMP	12.8VDC - 2.3A Stop/Turn, 0.9A Tail
WT/DIMS	.639 lb. / 6.063" x 3.75" x 2.25"
WARRANTY	Three Year Warranty





ST57RS







Cotronics



ST60RB





ST60 SERIES

Universal Mount Combination Tail Lights

- Stud mount stop/turn/tail light with back-up and license illuminator built in
- · Screw-on lens, easy to change bulbs
- · Grounds through mounting studs
- Shock-proof socket guarantees long bulb life
- Acrylic lens, corrosion proof plastic housing

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
	STOP/TURN/TAIL LIGHTS				
ST60RB	ST60RBP	Combination tail light	20		
		ACCESSORIES			
A60RB	A60RBP	Tail light lens	25		
A2057B	A2057BP	2057 replacement bulb	50		
		RETAIL			
ST60RS	Retail Ready	Combination tail light, clam	6		
FMVSS	STAIR				

optronics.



ST31RS

ST31 SERIES

MATERIALS

WARRANTY

VOLT/AMP

WT/DIMS

Weatherproof Surface Mount Light

Acrylic lens and plastic housing

.992 lb. / 5.75" x 6.625" x 2.813"


12.8VDC - 2.3A Stop/Turn, 0.9A Tail

- Snap-on lens, easy to change bulb
- Surface mount on 3-1/2" centers
- Hard wired, includes lead and ground wire

Three Year Warranty

• Polycarbonate lens, steel base plate

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		RETAIL	
ST31RS	Refall Reddy	Light, clam	12
	Į.	ACCESSORIES	
A2057B	A2057BP	2057 replacement bulb	50



FMVSS	STI
MATERIALS	Polycarbonate lens and steel housing
VOLT/AMP	12.8VDC - 2.3A Stop/Turn, 0.90A Tail
WT/DIMS	.309 lb. / 4.563" x 2.5" x 1.75"
WARRANTY	Three Year Warranty

COMBINATION TAIL LIGHTS & KITS

TL21/22RK

Magnetic Mount Towing Light Kit

- · Magnetic mount towing light kit
- Pair of DOT compliant stop/turn/tail lights
- 20-ft wishbone style wiring harness and 4-ft trunk connector with 4-way flat plug
- Replaceable lens and bulb

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
	RETAIL				
TL21RK	Retail Ready	Towing light kit, heavy duty	2		
TL22RK	kerdil keddy	Towing light kit	2		
		ACCESSORIES			
A52RB	A52RBP	Tail light lens	25		
A2057B	A2057BP	2057 replacement bulb	50		

FMVSS	STI
MATERIALS	Acrylic lens

MATERIALS Acrylic lens and plastic housing
VOLT/AMP 12.8VDC - 2.3A Stop/Turn, 0.9A Tail

WT/DIMS 3.53 lbs. / 7" x 4" x 2.125"
WARRANTY Three Year Warranty





TL22RK





TL21RK





BU11CS



BU11CS


Back-Up Light

- Single wire, grounds through mounting hardware
- Replaceable bulb (1156)

	BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
			RETAIL	
	BU11CS	Retail Ready	Back-up light, chrome housing	12
	FMVSS	R		
MATERIALS		S Polycarbo	onate lens and plastic housing	
VOLT/AMP		12.8VDC	- 0.4A	
WT/DIMS		.221 lbs. /	.221 lbs. / 3.25" x 3.25" x 1.938"	
WARRANTY		Y Three Yea	ar Warranty	







BU41 SERIES

Flange Mount Back-Up Light

- Hard wired, includes both lead and ground wire
- Replaceable bulb (1056)

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
BACK-UP LIGHT			
BU41CB	BU41CBP	Back-up light	50
ACCESSORIES			
A40SRB	A40ARBP	Snap retention ring	300
A41CB	A41CBP	Clear replacement lens for BU41	25

FMVSS	R
MATERIALS	Acrylic lens, steel housing
VOLT/AMP	12.8VDC - 1.182A
WT/DIMS	.441 lbs. / 5.375" x 5.375" x 1.563"
WARRANTY	Three Year Warranty

BU33/45/70 SERIESSealed Back-Up Lights

- 4" round, 6" oval and rectangular models
- Sonically sealed, waterproof
- Flush mount design accepts standard two-way plug
- Shock proof socket guarantees long bulb life
- · Kits include grommet and plug

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	4" ROUND	BACK-UP LIGHTS	
BU45CB	BU45CBP	Back-up light	50
BU44CB	BU44CBP	Kit: BU45CB, A45GB & A45CB	50
BU49CB	BU49CBP	Kit: BU45CB & A45GB	10
	6" OVAL	BACK-UP LIGHTS	
BU70CB	BU70CBP	Back-up light	50
BU74CB	BU74CBP	Kit: BU70CB, A70GB & A45CB	50
BU64CB	BU64CBP	Kit: BU70CB, A70GB & A49PB (pigtail attached to light)	50
	RECTANGUL	AR BACK-UP LIGHTS	
BU33CB	BU33CBP	Back-up light	10
BU33CRXLB	BU33CRXLBP	Back-up light with red reflex	20
BU33CRX24LB	BU33CRX24LBP	Back-up light with red reflex, 24V	20
	AC	CESSORIES	
A45GB	A45GBP	4" round grommet	50
A70GB	A70GBP	6" oval grommet	50
A33GB	A33GBP	Rectangular grommet	50
A45CB	A45CBP	Straight two-wire pigtail	100
A49PB	A49PBP	Right angle two-wire pigtail	100

FMVSS	R	
	BU33CI	RX: (2)R A
MATERIALS	Polycar	bonate lens and housing
VOLT/AMP	BU45:	12.8VDC - 2.182A
	BU70:	12.8VDC - 0.4A
	BU33:	12.8VDC - 1.6A; 24.0VDC87A
WT/DIMS	BU45:	.176 lbs. / 4.25" x 4.25" x 2.063"
	BU70:	.265 lbs. / 6.5" x 2.25" x 2.375"
	BU33:	.441 lbs. / 5.313" x 3.438" x 1.938"
WARRANTY	Three Y	ear Warranty





BU45CB





HOLE CUT-OUT: 4.5"





HOLE CUT-OUT: 6.85" x 2.5" (1.25" R)



BU33CB



BU33CRXLB







M1 WITH BEZEL



M1 WITH BEZEL

M1 SERIES

Millennium Series® 6.5" Marker/Clearance Lights

- Replaceable lens and bulb
- · Hard wired, includes separate ground wire
- Available with .180 male bullets or metripack connector
- Choose from light only or kit with chrome bezel

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
YELLOW				
00212351B	00212351P	12V, .180 bullets	20	
00212331B	00212331P	12V Kit: .180 bullets, bezel	20	
00212362B	00212362P	12V, Metripack connector	20	
00212342B	00212342P	12V Kit: Metripack connector, bezel	20	
RED				
00212333B	00212333P	12V Kit: .180 bullets, bezel	20	
ACCESSORIES				
00212317B	00212327P	Bezel	100/20	



FMVSS P2


MATERIALS Polycarbonate lens, housing and bezel

VOLT/AMP 12.8VDC - 0.33A; 24.0VDC - 0.17A

WT/DIMS .22 lbs. / 6.625" x 2.188" x 1"

WARRANTY Three Year Warranty






M3 SERIES

Millennium Series® 3" Marker/Clearance Lights

- Replaceable lens and bulb
- Hard wired, includes separate ground wire
- Molded .180 male bullets

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
YELLOW				
00212251B	00212251P	.180 bullets	20	
RED				
00212253B	00212253P	.180 bullets	20	
00212233B	00212233P	Kit: .180 bullets, bezel	20	
CLEAR				
00212239B	00212239P	Kit: .180 bullets, bezel	20	
ACCESSORIES				
00212217B	00212227P	Bezel	500/20	

FMVSS	P2
MATERIALS	Polycarbonate lens, housing and bezel
VOLT/AMP	12.8VDC - 0.33A
WT/DIMS	.20 lbs. / 3" x 2" x 1"
WARRANTY	Three Year Warranty



HOLE CUT-OUT: 1.375"





M3 WITH BEZEL



M3 WITH BEZEL



M3 CLEAR LENS WITH BEZEL






Gptronics



MC25/27 SERIES 2" & 2.5" Sealed Beehive Style Marker/Clearance Lights



Accepts standard two-pin PL-10 plug







MC27AB

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		YELLOW	
MC25AB	MC25ABP	2" light	20
MC27AB	MC27ABP	2.5" light	20
		ACCESSORIES	
A46PB	A46PBP	Straight PL-10 plug, 6" lead	100
A86PB	A86PBP	Straight PL-10 plug, 18" lead	100
A54GB	A54GBP	2" Flush mount grommet	100
A54GK	A54GKP	2" Kit: A54GB and A46PB	100
A55CB	A55CBP	2" Chrome trim ring	20
A55GB	A55GBP	2.5" Flush mount grommet (open back)	50
A56GB	A56GBP	2.5" Recess mount grommet (closed back)	100
A57GB	A57GBP	2.5" Recess mount grommet (open back)	50
A55GK	A55GKP	2.5" Kit: A55GB and A46PB	100
A57GK	A57GKP	2.5" Kit: A57GB and A46PB	100
A57CB	A57CBP	2.5" Chrome trim ring	20
BK5557GB	BK5557GBP	2"/2.5" Cam-on mounting bracket	50

FMVSS	P2
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 0.2A
WT/DIMS	MC25: .088 lbs. / 2" x 2" x 1.75"
	MC27: .110 lbs. / 2.5" x 2.5" x 2.313"
WARRANTY	Three Year Warranty



MC25 SERIES HOLE CUT-OUT: 2.313"



MC27 SERIES HOLE CUT-OUT: 2.75"

MC52 SERIES

2" Round Sealed Recess Flange Mount Marker/Clearance Lights


- Sonically sealed, waterproof light for recess mount
- Accepts standard two-pin PL-10 plug
- Available in yellow and red models, with black or reflex flange
- Reflex flange model meets SAE "A" requirements for conspicuity

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	Υ	'ELLOW	
MC52AB	MC52ABP	Yellow, black flange	50
MC52AXB	MC52AXBP	Yellow, reflex lens and flange	50
		RED	
MC52RB	MC52RBP	Red, black flange	50
MC52RXB	MC52RXBP	Red, reflex lens and flange	50
	ACC	ESSORIES	
A46PB	A46PBP	Straight PL-10 plug, 6" lead	100
A86PB	A86PBP	Straight PL-10 plug, 18" lead	100
A3TRSSB	A3TRSSBP	Stainless steel flange cover	100
FMVSS	Black flange: I	on	
1 101 4 0 0	Reflex flange: A		
MATERIALS	ŭ	lens and housing	
VOLT/AMP	12.8VDC - 0.2A		
		•	
WT/DIMS	Black flange: .	066 lbs. / 2.938" x 2.938" x .813"	
	Reflex flange: .	066 lbs. / 2.984" x 2.984" x .75"	
WARRANTY	Three Year War	rranty	















MC52 Reflex Flange

optronics

MC53 & MC54 SERIES 2" Sealed Marker/Clearance Lights






- Accept standard two-pin PL-10 plugs
- Available in yellow, red, and yellow ABS models
- Available in recess and surface mount models

	мС53АВ
MC53RB	
	ABS
	MC53ABSB
2"	11/16"
HOLE CUT-	-OUT: 2.313"

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YE	ELLOW	
MC53AB	MC53ABP	Recess mount	50
MC53ABSB	MC53ABSBP	Recess mount "ABS"	50
MC53AKB	MC53AKBP	Kit: MC53AB, A54GB and A46PB	50
MC54AB	MC54ABP	Flange surface mount	50
MC505ABSB	MC505ABSBP	Flange surface mount "ABS"	50
		RED	
MC53RB	MC53RBP	Recess mount	50
MC53RKB	MC53RKBP	Kit: MC53RB, A54GB and A46PB	50
MC54RB	MC54RBP	Flange surface mount	50
	ACCE	ESSORIES	
A46PB	A46PBP	Straight PL-10 plug, 6" lead	100
A86PB	A86PBP	Straight PL-10 plug, 18" lead	100
A54GB	A54GBP	2" Flush mount grommet	100
A54GK	A54GKP	2" Kit: A54GB and A46PB	100
A55CB	A55CBP	2" Chrome trim ring	20
BK5557GB	BK5557GBP	Cam-on mounting bracket	50
	R	ETAIL	
MC53AS	Retail Ready	Yellow recess mount light, clam	12
MC53RS		Red recess mount light, clam	12



FMVSS	P2 PC	
MATERIALS	Polycarbonate lens and housing	
VOLT/AMP	12.8VDC - 0.2A	
WT/DIMS	MC53: .066 lbs. / 2" x 2" x .688"	
	MC54/505: .066 lbs. / 2.938" x 2.938" x .813"	
WARRANTY	Three Year Warranty	



SURFACE MOUNT

SEALED MARKER/ CLEARANCE LIGHTS

MC55 & MC57 SERIES

2.5" Sealed Marker/Clearance Lights for Recess Mount

- Sonically sealed, waterproof design for recess mount
- Accept standard two-pin PL-10 plug
- MC55 series lights are PC rated
- MC57 series lights feature built-in reflex

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		YELLOW	
MC55AB	MC55ABP	PC rated light	50
MC57AB	MC57ABP	P2 rated light with reflex	50
		RED	
MC55RB	MC55RBP	PC rated light	50
MC57RB	MC57RBP	P2 rated light with reflex	50
		ACCESSORIES	
A46PB	A46PBP	Straight PL-10 plug, 6" lead	100
A86PB	A86PBP	Straight PL-10 plug, 18" lead	100
A55GB	A55GBP	Flush mount grommet, open back	50
A56GB	A56GBP	Recess mount grommet, closed back	100
A57GB	A57GBP	Recess mount grommet, open back	50
A55GK	A55GKP	Kit: A55GB & A46PB	100
A57GK	A57GKP	Kit: A57GB & A46PB	100
A57CB	A57CBP	Chrome trim ring	20
BK5557GB	BK5557GBP	Cam-on mounting bracket	50
		RETAIL	
MC57AS		Yellow light with reflex, clam	12
MC57RS	Retail Ready	Red light with reflex, clam	12

FMVSS	MC55: P2 PC
	MC57: A P2
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 0.2A
WT/DIMS	.066 lbs. / 2.5" x 2.5" x .688"
WARRANTY	Three Year Warranty














optronics




MC56 SERIES

2.5" Sealed Recess Flange Mount Marker/Clearance Lights

- Sonically sealed, waterproof light for recess mount
- Accepts standard two-pin PL-10 plug

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	Y	ELLOW	
MC56AB	MC56ABP	Recess flange mount	50
		RED	
MC56RB	MC56RBP	Recess flange mount	50
	ACC	ESSORIES	
A46PB	A46PBP	Straight PL-10 plug, 6" lead	100
A86PB	A86PBP	Straight PL-10 plug, 18" lead	100



HOLE CUT-OUT: 2.75"

FMVSS P2

Polycarbonate lens and housing **MATERIALS**

VOLT/AMP 12.8VDC - 0.2A

WT/DIMS .11 lb. / 3.438" x 3.438" x .938"

WARRANTY Three Year Warranty

MC61ABKB

Sealed Marker/Clearance Light and Reflector in Elevated Bracket






- Sonically sealed, waterproof
- PC rated light fulfills front side marker requirement when properly mounted on a 15 degree angle
- Corrosion proof, surface mount wedge base
- Single wire design grounds through mounting hardware



BULK P/N	POLYPACK P/N	DESCRIPTION	QT	Υ
	LIGHT/RE	FLECTOR ASSEMBLY		
MC61ABKB	MC61ABKBP	Light & reflector in bracket	20)


FMVSS	Light: P2 PC; Reflector: A
MATERIALS	Polycarbonate lens and housing; Acrylic reflector
VOLT/AMP	12.8VDC - 0.2A
WT/DIMS	.066 lbs. / 6.687" x 1.5" x 1.625"
WARRANTY	Three Year Warranty



optronics











MC65/67 & BA65 SERIES Sealed Fender Lights

- · Sonically sealed, waterproof
- PC rated design includes two bulbs
- Multiple mounting and wiring options available
- Single wire design grounds through mounting hardware
- Two-wire design includes both lead and ground wires

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	AMBER	RED FENDER LIGHT	
MC65ARB	MC65ARBP	Light only	50
MC67ARB	MC67ARBP	Kit: MC65ARB & A65PB bracket/plug	50
AM	BER/RED FEN	DER LIGHT ASSEMBLIES	
BA65ARLB	BA65ARLBP	Fender light assembly, left side: MC65AB & MC65RB in fender mount bracket	25
BA65ARRB	BA65ARRBP	Fender light assembly, right side: MC65AB & MC65RB in fender mount bracket	25
	AC	CCESSORIES	
A67BB	A67BBP	CCESSORIES Fender bracket, black	50
A67BB A65B			50 50
	A67BBP	Fender bracket, black	
A65B	A67BBP A65BP	Fender bracket, black Black bracket	50
A65B A65P	A67BBP A65BP A65PP	Fender bracket, black Black bracket Single wire plug, .156 male bullet	50 50
A65B A65P A65PB	A67BBP A65BP A65PP A65PBP	Fender bracket, black Black bracket Single wire plug, .156 male bullet Kit: A65B black bracket & A65P plug	50 50 50
A65B A65P A65PB A66PB	A67BBP A65BP A65PP A65PBP A66PBP	Fender bracket, black Black bracket Single wire plug, .156 male bullet Kit: A65B black bracket & A65P plug Kit: Gray bracket & A65P plug	50 50 50 50

FMVSS	MC65ARB:	P2
	BA65:	P2 P3 PC2
MATERIALS	MC65:	Polycarbonate lens and housing
	BA65:	Polycarbonate lens and housing, plastic bracket
VOLT/AMP	MC65:	12.8VDC - 0.689A
	BA65:	12.8VDC - 0.8A
WT/DIMS	MC65:	.066 lbs. / 3.938" x 1.25" x .875"
	BA65:	.375 lbs. / 9.188" x 4.688" x 1.875"
WARRANTY	Three Year	Warranty

MC65/67 SERIES

Sealed Marker/Clearance Lights


- Sonically sealed, waterproof
- PC rated design includes two bulbs
- Multiple mounting and wiring options available
- Single wire design grounds through mounting hardware


PC Rated

• Two-wire design includes both lead and ground wires

BULK P/N	POLYPACK P/N DESCRIPTION		QTY
		YELLOW	
MC65AB	MC65ABP	Light only	50
MC67AB	MC67ABP	Kit: MC65AB & A65PB	50
		RED	
MC65RB	MC65RBP	Light only	50
MC67RB	MC67RBP	Kit: MC65RB & A65PB	50
		ACCESSORIES	
A65B	A65BP	Black bracket	50
A65P	A65PP	Single wire plug, .156 male bullet	50
A65PB	A65PBP	Kit: A65B black bracket & A65P plug	50
A66PB	A66PBP	Kit: Gray bracket & A65P plug	50
A67CB	A67CBP	Kit: Chrome bracket & A65P plug	50
A68PB	A68PBP	Kit: Black bracket & 2-wire plug	50
		on mounting and wiring accessories, ries section at back of catalog.	
		RETAIL	
MC67AK		Yellow kit: MC65AB & A65PB, clam	12
MC67RK		Red kit: MC65RB & A65PB, clam	12
MC65AS		Yellow light, clam	12
MC65RS		Red light, clam	12

FMVSS	P2 P3 PC2
MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 0.4A
WT/DIMS	.066 lbs. / 3.938" x 1.25" x .875"
WARRANTY	Three Year Warranty













MC67RB MC67RK



PC Rated

Cotronics









A91RB MC90RS



MC91AB MC91AS




MC91RS




MC92AB MC92AS



MC92RB MC92RS



A91 light only



MC91 SERIES

Sealed Marker/Clearance Lights

- Sonically sealed, waterproof
- PC rated design
- Multiple mounting and wiring options available
- Single wire design grounds through mounting hardware
- Two-wire design includes both lead and ground wires

	BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
			YELLOW	
	A91AB	A91ABP	Light only	100
	MC91AB	MC91ABP	Kit: A91AB, A91CB & A91LW	50
	MC92AB	MC92ABP	Kit: A91AB, A91BB & A91LW	50
ł			RED	
	A91RB	A91RBP	Light only	100
	MC92RB	MC92RBP	Kit: A91RB, A91BB & A91LW	50
			ACCESSORIES	
	A46PB	A46PBP	2-wire plug, 6" lead	100
	A86PB	A86PBP	2-wire plug, 18" lead	100
	A90CB	A90CBP	Chrome snap-on cover	100
	A91LW	A91LWP	1-wire plug, 12" lead	100
	A91BB	A91BBP	Black base, self grounding	100
	A91BOB	A91BOBP	Black base, open back	100
	A91CB	A91CBP	Chrome base, self grounding	100
	A910B	A91OBP	Chrome base, open back	100
	A91GB	A91GBP	Grommet	100
			RETAIL	
	MC90AS		Yellow light only, clam	12
	MC90RS	Retail Ready	Red light only, clam	12
	MC91AS		Yellow light kit: A91AB, A91CB chrome base, A91LW single wire plug, clam	12
	MC91RS		Red light kit: A91RB, A91CB chrome base, A91LW single wire plug, clam	12
	MC92AS		Yellow light kit: A91AB, A91BB black base, A91LW single wire plug, clam	12
	MC92RS		Red light kit: A91RB, A91BB black base, A91LW single wire plug, clam	12

FMVSS P2 PC

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - 0.2A

WT/DIMS .066 lbs. / 2.5" x 1.188" x .875"

WARRANTY Three Year Warranty



MC11 SERIES

Mini Marker/Clearance Lights

- Surface mount on 2-3/4" centers
- Single wire design grounds through mounting hardware
- Snap-on lens, replaceable bulb


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		YELLOW	
MC11AB	MC11ABP	Yellow, black base	50
		RED	
MC11RB	MC11RBP	Red, black base	50
		ACCESSORIES	
A11AB	A11ABP	Yellow replacement lens	50
A11RB	A11RBP	Red replacement lens	50
A194B	A194BP	194 replacement bulb	100
		RETAIL	
MC11AS		Yellow light, clam	12
MC11RS	Retail Ready	Red light, clam	12
MC11AK		(6) MC11AB, hardware, connectors, clam	6
UL11BS		Blue utility light, clam	12
FMVSS	P2 (exce	pt UL11BS)	
MATERIAI	•	ens, ABS housing	
VOLT/AMI	·	•	
WT/DIMS	.044 lbs.	/ 3.188" x 1" x 1.125"	
WARRAN [*]	TY Three Ye	ear Warranty	
		.,	













MC11AK

MC30 SERIES

Marker/Clearance Light with Reflex


- Surface mount on 2" centers
- Plug-n-go design for quick connection to power and ground
- Snap-on lens, replaceable bulb

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		YELLOW	
MC30AB	MC30ABP	Yellow	20
		ACCESSORIES	
A194B	A194BP	194 replacement bulb	100
FMVSS	A P2 PC		
MATERIAL	S Acrylic lei	ns, ABS housing	
VOLT/AMP	12.8VDC	- 0.2A	
WT/DIMS	.11 lb. / 3	" x 2.25" x .938"	
WARRANT	TY Three Yea	ar Warranty	



PC Rated





Gptronics

MC22AB

MC22RB




Beehive Marker/Clearance Lights

- Surface mount on 3/4" centers
- Single wire design grounds through mounting hardware




Snap-on lens, replaceable bulb

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		YELLOW	
MC22AB	MC22ABP	Yellow	50
		RED	
MC22RB	MC22RBP	Red	50
		ACCESSORIES	
A21AB	A21ABP	Yellow replacement lens for MC21	50
A21RB	A21RBP	Red replacement lens for MC21	50
		RETAIL	
MC21AS	Retail Ready	Yellow light, clam	12
MC21RS		Red light, clam	12









MC31/32 SERIES

Surface Mount Marker/Clearance Lights with Reflex

- Surface mount on 3" centers
- Lens with reflex eliminates need for separate reflector
- MC31 is single wire design, grounds through mounting hardware
- MC32 has twist-in socket with separate ground wire
- Snap-on lens, replaceable 194 bulb

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		YELLOW	
MC31AB	MC31ABP	Oval, black base, single wire	50
MC31A15B2	MC31A15B2P	MC31AB with .156 female barrels	50
MC32AB	MC32ABP	Oblong, white base, two-wire	100
MC32ABB	MC32ABBP	Oblong, black base, two-wire	100
		RED	
MC31RB	MC31RBP	Oval, black base, single wire	50
MC31R15B2	MC31R15B2P	MC31RB with .156 female barrels	50
MC32RB	MC32RBP	Oblong, white base, two-wire	100
MC32RBB	MC32RBBP	Oblong, black base, two-wire	100
	AC	CESSORIES	
A31AB	A31ABP	Yellow replacement lens, MC31	50
A31RB	A31RBP	Red replacement lens, MC31	50
A32AB	A32ABP	Yellow replacement lens, MC32	50/10
A32RB	A32RBP	Red replacement lens, MC32	50/10
A32GB	A32GBP	Mounting gasket, white	500
A194B	A194BP	194 replacement bulb	100
		RETAIL	
MC31AS	Retail Ready	MC31AB, clam	12
MC31RS	Kerdil Reddy	MC31RB, clam	12
MC32AS		MC32AB, clam	12
MC32ABS		MC32ABB, clam	12
MC32RS		MC32RB, clam	12
MC32RBS		MC32RBB, clam	12

FMV\$	SS	AP2	

MATERIALS Acrylic lens, ABS housing

VOLT/AMP 12.8VDC - 0.2A

WT/DIMS MC31: .088 lb. / 4" x 2.063" x 1.094"

MC32: .11 lb. / 4" x 2" x 1.125"

WARRANTY Three Year Warranty







MC31AB



MC31RB








MC32AB



MC32RB







Gptronics






MC35AEB





MC36RB



MC35/36 SERIES

Surface Mount Marker/Clearance Lights with Reflex

- Surface mount lights; choose from ear mount or stud mount versions
- Lens with reflex eliminates need for separate reflector
- MC35 is ear mount version
- MC36 is stud mount version
- Single wire design grounds through mounting hardware
- Screw-on lens, replaceable bulb, black plastic base


BULK P/N POLYPACK P/N DESCRIPTION Q	YT
	(
YELLOW	
MC35AB MC35ABP Yellow ear mount 5	50
MC35AEB MC35AEBP Yellow ear mount, rectangular 2	200
MC36AB MC36ABP Yellow stud mount 5	50
RED	
MC36RB MC36RBP Red stud mount 5	50
ACCESSORIES	
A35AEB A35AEBP Yellow replacement lens 5	50
A36AB A36ABP Yellow replacement lens 5	50
A36RB A36RBP Red replacement lens 5	50
A194B A194BP 194 replacement bulb 19	00
RETAIL	
MC35AS Retail Ready Yellow ear mount light, clam 1	12
MC36AS Yellow stud mount light, clam 1	12
MC36AS6 Yellow stud mount light, clam	6
MC36RS Red stud mount light, clam 1	12
MC36RS6 Red stud mount light, clam	6
FM/00 A D0	
FMVSS A P2	


MATERIALS Acrylic lens, ABS housing
VOLT/AMP 12.8VDC - 0.2A

WT/DIMS MC35: .132 lb. / 3.875" x 2.375" x 1.094"

MC35AEB: .132 lb. / 3.75" x 2.063" x .938" MC36: .132 lb. / 2.75" x 2.125" x 1"

WARRANTY Three Year Warranty





MC37 SERIES

Stud Mount Marker/Clearance Light with Reflex


- Stud mount design; grounds through mounting stud
- Lens with reflex eliminates need for separate reflector
- Replaceable bulb
- Polycarbonate lens and housing

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		YELLOW	
MC37AB	MC37ABP	Yellow	50
		ACCESSORIES	
A194B	A194BP	194 replacement bulb	100
FMVSS	A P2		
MATERIAL	S Polycarbo	onate lens and housing	
VOLT/AMF	12.8VDC	- 0.2A	
WT/DIMS	.11 lb. / 2.	.875" x 2.125" x .938"	
WARRANT	TY Three Yea	ar Warranty	





MC37AB



MC38 SERIES

Surface Mount Marker/Clearance Lights with Reflex

- Surface mount on 3" centers
- Lens with reflex eliminates need for separate reflector
- Single wire design grounds through mounting hardware
- Snap-on lens, replaceable bulb


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
	YELLOW				
MC38AB	MC38ABP	Yellow	50		
		RED			
MC38RB	MC38RBP	Red	50		
		ACCESSORIES			
A38AB	A38ABP	Yellow replacement lens	50		
A38RB	A38RBP	Red replacement lens	50		
A194B	A194BP	194 replacement bulb	100		

FMVSS	AP2
MATERIALS	Acrylic lens, ABS housing
VOLT/AMP	12.8VDC - 0.2A
WT/DIMS	.11 lb. / 4" x 2.063" x 1.156
WARRANTY	Three Year Warranty

Cotronics












MC42AB



MC42RB



MC42 SERIES

Dual Bulb Marker/Clearance Lights

- Dual bulb, bullseye style lights with black base
- Snap-on lens and replaceable bulbs
- Surface mount on 3" centers
- Single wire design grounds through mounting hardware


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		YELLOW	
MC42AB	MC42ABP	Yellow	50
		RED	
MC42RB	MC42RBP	Red	50
		ACCESSORIES	
A42AB	A42ABP	Yellow replacement lens	10
A42RB	A42RBP	Red replacement lens	10
A194B	A194BP	194 replacement bulb	100
		RETAIL	
MC42AS	Retail Ready	Yellow light, clam	12
MC42RS		Red light, clam	12
FMVSS	P2		
MATERIAL	· -	ns, ABS housing	
VOLT/AMP	•	· ·	
WT/DIMS		1.094" x 2.125" x 1.125"	
WARRANT	Y Three Yea	ar Warranty	



MC48AB/APG



MC48RB/RPG



MC48 SERIES

Marker/Clearance Lights with Reflex

- Flush mount on 3-3/8" centers
- Lens with reflex eliminates need for separate reflector
- Twist-in socket with replaceable bulb and ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		YELLOW	
MC48AB	MC48ABP	Yellow	50
MC48APG	MC48APGP	Yellow with .156 female barrels	50
		RED	
MC48RB	MC48RBP	Red	50
MC48RPG	MC48RPGP	Red with .156 female barrels	50
		ACCESSORIES	
A194B	A194BP	194 replacement bulb	100
FMVSS	AP2		
MATERIAL	S Acrylic ler	ns, ABS housing	
VOLT/AMP	12.8VDC	- 0.2A	
WT/DIMS	.132 lb. / 3	3.906" x 1.843" x 1.031"	
WARRANT	Y Three Yea	ar Warranty	

MC44 & BA44 SERIES

Surface Mount Marker/Clearance Lights with Reflex

- Surface mount on 3" centers
- Lens with reflex eliminates need for separate reflector
- Two-wire design includes both lead and ground wire
- Snap-on lens, replaceable bulb
- Fender light assembly includes one each MC44AB and MC44RB in black ABS bracket; female plug on power wire, grounding eyelet on ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		YELLOW	
MC44AB	MC44ABP	Yellow, two-wire	50
MC44AB1	MC44AB1P	Yellow, single wire	50
		RED	
MC44RB	MC44RBP	Red, two-wire	50
MC44RB1	MC44RB1P	Red, single wire	50
YE	LLOW/RED FE	NDER LIGHT ASSEMBLY	
BA44FNL	BA44FNLP	Left side	25
BA44FNR	BA44FNRP	Right side	25
		ACCESSORIES	
MC441WB	-	Single wire base only	500
MC442WB	-	Two-wire base only	50
A44A500B	-	Yellow replacement lens, 500-pack 500	
A44R500B	-	Red replacement lens, 500-pack	500
A44AB	A44ABP	Yellow replacement lens	10
A44RB	A44RBP	Red replacement lens	10
A194B	A194BP	194 replacement bulb	100
A44GTB	-	Mounting gasket, thick, white	1000
		RETAIL	
MC44AS	Retail Ready	Yellow light, clam	12
MC44RS	kerall keady	Red light, clam	12






MC44AB




MC44RB



A44GB





BA44FNR

FMVSS A P2

WT/DIMS

MATERIALS Acrylic lens, ABS housing
VOLT/AMP MC44: 12.8VDC - 0.4A
BA44: 12.8VDC - 0.8A

MC44: .066 lb. / 4" x 1.5" x .938"

BA44: .353 lb. / 8.5" x 3.875" x 1.75"


WARRANTY Three Year Warranty

MC58 SERIES

2.5" Marker/Clearance Lights

- Surface mount on 1-1/2" centers
- Single wire design grounds through mounting hardware
- Snap-on lens, replaceable bulb





MC58AS

MC58RS

P2 **FMVSS**

MATERIALS Acrylic lens, ABS housing

VOLT/AMP 12.8VDC - 0.2A

WT/DIMS .066 lbs. / 2.5" x 2.5" x 1.063"


WARRANTY Three Year Warranty



MC66AB



MC66RB



MC66 SERIES

Surface Mount Dual Bulb Marker/Clearance Lights

- Surface mount on 3" centers
- Includes both lead and ground wires
- Snap-on lens, replaceable bulb



BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		YELLOW	
MC66AB	MC66ABP	Yellow	50
MC66HAB	MC66HABP	Yellow, single wire, self grounding	50
		RED	
MC66RB	MC66RBP	Red	50
		ACCESSORIES	
A66AB	A66ABP	Yellow replacement lens	50
A66RB	A66RBP	Red replacement lens	50
A194B	A194BP	194 replacement bulb	100
		RETAIL	
MC66AS	Retail Ready	Yellow light, clam	12
MC66RS	Reddy	Red light, clam	12
FMVSS	P2 PC		
MATERIAL	S Acrylic ler	ns, ABS housing	
VOLT/AMP 12.8VDC - 0.4A			
WT/DIMS	.132 lb. / 4	4" x 2.063" x 1.063"	
WARRANTY Three Year Warranty			

MC68 SERIES

Oblong Marker/Clearance Lights

- Surface mount on 2-3/4" centers
- Single wire design grounds through mounting hardware
- Snap-on lens, replaceable bulb

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		YELLOW	
MC68AB	MC68ABP	Yellow, self grounding	50
		RED	
MC68RB	MC68RBP	Red, self grounding	50
		ACCESSORIES	
A68AB	A68ABP	Yellow replacement lens	50
A68RB	A68RBP	Red replacement lens	50
		RETAIL	
MC68AS		Yellow light, clam	12
MC68RS	Retail Ready	Red light, clam	12

FMVSS	P2
	^

MATERIALS Acrylic lens, ABS housing

VOLT/AMP 12.8VDC - 0.2A

WT/DIMS .088 lb. / 3.5" x 1.125" x 1"
WARRANTY Three Year Warranty


optronics



MC68AB



MC68RB



MC70 SERIES

Marker/Clearance Lights with Reflex

- Surface mount on 4-13/16" centers
- Lens with reflex eliminates need for separate reflector
- Weathertight plug included


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		YELLOW	
MC70AB	MC70ABP	Yellow	20
		RED	
MC70RB	MC70RBP	Red	20
		RETAIL	
MC70AS	Retail Ready	Yellow light, clam	6
MC70RS		Red light, clam	6
FMVSS	A P2		
MATERIAL	S Acrylic ler	ns, plastic housing	
VOLT/AMP	12.8VDC	- 0.422A	
WT/DIMS	.132 lb. / s	5.813" x 2" x 1.188"	
WARRANT	Y Three Yea	ar Warranty	



мС70АВ



MC70RB




Gatronics



MC71AS



MC71RS



MC71 SERIES

Marker/Clearance Lights

- Flush mount on 2" centers; chrome finish bezel
- Twist-in socket, includes both lead and ground wire
- Replaceable bulb

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		RETAIL	
MC71AS		Yellow light, clam	12
MC71RS	Retail Ready	Red light, clam	12
		ACCESSORIES	
A194B	A194BP	194 replacement bulb	100

FMVSS	P:
-------	----

MATERIALS Acrylic lens, ABS housing and bezel

VOLT/AMP 12.8VDC - 0.4A

WT/DIMS .132 lb. / 3.75" x 2.25" x 0.5"

WARRANTY Three Year Warranty

Gptronics

MC76 SERIES

Marker/Clearance Light with Reflex



MC76AB

- Dual bulb light with built-in reflex
 Lens with reflex eliminates need
 - Lens with reflex eliminates need for separate reflector
 - Surface mount on 4-13/16" centers
 - Hard wired, single wire design is self grounding

2 1/16"	
	← 6"
<u>†</u> 1"	4.13/16"

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		YELLOW	
MC76AB	MC76ABP	Yellow	50
		ACCESSORIES	
A194B	A194BP	194 replacement bulb	100

FMVSS	AP2
MATERIALS	Acrylic lens, ABS housing
VOLT/AMP	12.8VDC - 1.0A
WT/DIMS	.132 lb. / 6" x 2.063" x 1"
WARRANTY	Three Year Warranty

MARKER/CLEARANCE LIGHTS SURFACE MOUNT

MC81 SERIES

Chrome Marker/Clearance Lights

- Surface mount on 3-7/8" centers
- Single wire design grounds through mounting hardware
- Replaceable lens and bulb

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		YELLOW	
MC81AB	MC81ABP	Yellow, self grounding	50
		RED	
MC81RB	MC81RBP	Red, self grounding	50
		ACCESSORIES	
A81AB	A81ABP	Yellow replacement lens	50
A81RB	A81RBP	Red replacement lens	50
A194B	A194BP	194 replacement bulb	100

FMVSS	P2
-------	----

MATERIALS Acrylic lens, ABS housing

VOLT/AMP 12.8VDC - 0.2A

WT/DIMS .176 lb. / 4.781" x 2.125" x 1.375"

WARRANTY Three Year Warranty






MC81AB



MC81RB



MC82 SERIES

Armored Marker/Clearance Lights

- Surface mount on 3-7/8" centers
- Single wire design grounds through mounting hardware
- Replaceable lens and bulb

		Refre	•
BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		YELLOW	
MC82AB	MC82ABP	Yellow	20
		RED	
MC82RB	MC82RBP	Red	20
		ACCESSORIES	
A82AB	A82ABP	Yellow replacement lens	50
A82RB	A82RBP	Red replacement lens	50
A194B	A194BP	194 replacement bulb	100
EW//SS	D2 DC		

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		YELLOW	
MC82AB	MC82ABP	Yellow	20
		RED	
MC82RB	MC82RBP	Red	20
		ACCESSORIES	
A82AB	A82ABP	Yellow replacement lens	50
A82RB	A82RBP	Red replacement lens	50
A194B	A194BP	194 replacement bulb	100
FMVSS	P2 PC		
MATERIAL	S Acrylic ler	ns, steel housing	
VOLT/AMP	12.8VDC	- 0.2A	
WT/DIMS	.441 lb. / 4	4.5" x 2" x 1.5"	
WARRANT	Y Three Yea	ar Warranty	






MC95AB



MC95RB



MC95 SERIES

Sealed Marker/Clearance Lights

- Sonically sealed, waterproof
- Stainless steel base
- Single wire design grounds through mounting hardware

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
BULK P/N	PULI PACK P/N	DESCRIPTION	QII
		YELLOW	
MC95AB	MC95ABP	Yellow	50
MC95APG	MC95APGP	Yellow, .180 male bullet	50
		RED	
MC95RB	MC95RBP	Red	50
		RETAIL	
MC95AS		Yellow light, clam	12
MC95RS	Retail Ready	Red light, clam	12
FMVSS	P2 P3		
MATERIAL	S Polycarbor	nate lens and housing, stainless steel bas	e
VOLT/AMP	12.8VDC -	- 0.2A	
WT/DIMS	.088 lb. / 2	2.063" x .688" x 1"	
WARRANTY Three Year Warranty			

SURFACE MOUNT MARKER/CLEARANCE LIGHTS

CB11 SERIES


Yellow Cab/Clearance Lights

- White and black base models, mounts on 3" centers
- Replaceable lens and bulb (67 bulb)
- Includes both lead and ground wires



BULK P/N POLYPACK P/N DESCRIPTION		QTY	
	CAB/	CLEARANCE LIGHT	
CB11WAB	CB11WABP	Yellow, white base	50
CB11AB	CB11ABP	Yellow, black base	50
		RETAIL	
CB11AS		Cab light, black base, clam	12
CB11AS6	Retail Ready	Cab light, black base, clam	6
CB15AK		5-pc cab light kit, black base, clam	6

FMVSS	P2 PC	
MATERIALS	Acrylic lens, ABS housing	
VOLT/AMP	12.8VDC - 0.569A	
WT/DIMS	CB11: .176 lb. / 5.5" x 2.375" x 1.625"	
	CB15: 1.191 lbs. / 5.5" x 2.375" x 1.625"	
WARRANTY	Three Year Warranty	







CB11WAB



CB11AS



Gptronics

CB20 SERIES

Yellow Cab/Clearance Light

- Surface mount on 1-1/2" centers, gasket included
- Sealed polycarbonate lens and housing
- Includes both lead and ground wires



CB20AB
2 3/4" 1 1/2"
1 11/16"

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	CAB/	CLEARANCE LIGH	IT
CB20AB	CB20ABP	Yellow	50
		RETAIL	
CB20AS		Yellow, clam	12
	Retail Ready		

FMVSS P2	PC
----------	----

MATERIALS Acrylic lens, ABS housing


VOLT/AMP 12.8VDC - 0.2A

WT/DIMS .265 lb. / 3.5" x 2.75" x 1.688"

WARRANTY Three Year Warranty

CB22AB

CB22RB



CB22 SERIES Cab/Clearance Lights



- Surface mount on 1-3/4" centers, gasket included
- Sealed polycarbonate lens and housing
- Twist-in socket with both lead and ground wires

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
		YELLOW		
CB22AB	CB22ABP	Yellow	50	
		RED		
CB22RB	CB22RBP	Red	50	
		ACCESSORIES		
A194B	A194BP	194 replacement bulb	100	
RETAIL				
CB22AS	Retail Ready	Yellow, clam	12	
FMVSS	P2 PC			
MATERIAL	S Polycarbo	nate lens and housing		
VOLT/AMF	12.8VDC	- 0.2A		
WT/DIMS	.132 lb. / 3	3.875" x 3.125" x 1.625"		
WARRAN1	TY Three Yea	ar Warranty		

IDENTIFICATION

MC77RB

Identification Light Bar


- Steel base with white finish
- Surface mount on 7" centers
- · Snap-on lens and replaceable bulb
- · Single wire design, self grounding





MC77RB

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	RE	D ID LIGHT BAR	
MC77RB	MC77RBP	ID light bar	20
	1	ACCESSORIES	
A68RB	A68RBP	Red replacement lens	50
FMVSS	P2		
MATERIALS	Acrylic lens	s, ABS housing, steel base	
VOLT/AMP	12.8VDC -	1.0A (193 bulb)	
WT/DIMS	.265 lb. / 1	5.563" x 1.188" x 1.313"	
WARRANTY	Three Year	^r Warranty	



MC93 SERIES

Sealed Identification Light Bars

- Surface mount on 7-1/2" centers
- Sealed, waterproof lights
- Hard wired, power and ground





BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	MC93RB
		YELLOW		
MC93AB	MC93ABP	Yellow	20	
		RED		
MC93RB	MC93RBP	Red	20	
MC93RPG	MC93RPGP	Red, .180 male bullet on power wire	20	
MC93R2PG	MC93R2PGP	Red, .180 male bullets on both wires	20	
	A	CCESSORIES		
A91AB	A91ABP	Yellow replacement light	100	
A91RB	A91RBP	Red replacement light	100	
A93PB	A93PBP	Harness for light bar	100	
		RETAIL		
MC93RK	Retail Ready	Red ID light bar, clam	6	
FMVSS	P2			15 15/16*
MATERIALS	Polycarbor	nate lens and housing, ABS base		7 1/2" - Øss
VOLT/AMP	12.8VDC -	•		1 1 15/32"
WT/DIMS	.397 lb. / 1	7" x 1.438" x 1.625"		
WARRANTY	Three Year	Warranty		15/8"

MC94RB

Identification Light Bar



- Stainless steel base
- Surface mount on 16-1/16" centers
- Sealed, waterproof lights
- Hard wired, power and ground

	BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		RE	D ID LIGHT BAR	
	MC94RB	MC94RBP	ID light bar	20
		1	ACCESSORIES	
	A91RB	A91RBP	Red replacement light	100
	A93PB	A93PBP	Harness for light bar	100
1 3/8" 16 1/16" 16 1/2" 1 5/8"	FMVSS MATERIALS VOLT/AMP WT/DIMS WARRANTY	12.8VDC - .441 lb. / 10	6.5" x 1.375" x 1.625"	

optronics


MC97 SERIES

Sealed Identification Light Bars



- Stainless steel base
- Surface mount on 8-1/2" centers
- Sealed, waterproof lights
- Single wire, self grounding

	and an		
POLYPACK P/N	DESCRIPTION	QTY	
RED I	D LIGHT BARS		
MC97RBP	Red	20	
-	Red, .156 female plug, 70" lead	20	
CLEAF	R UTILITY LIGHT		
UL97CPGP	Clear	50	
ACCESSORIES			
MC95RBP	Red replacement light	50	
	RETAIL		
Retail Ready	Red ID light bar, clam	6	
D2			
	RED I MC97RBP - CLEAR UL97CPGP AC MC95RBP	POLYPACK P/N DESCRIPTION RED ID LIGHT BARS MC97RBP Red - Red, .156 female plug, 70" lead CLEAR UTILITY LIGHT UL97CPGP Clear ACCESSORIES MC95RBP Red replacement light RETAIL Red ID light bar, clam	



FMVSS	P2
MATERIALS	Polycarbonate lens and housing, stainless steel base
VOLT/AMP	12.8VDC - 1.0A
WT/DIMS	.441 lb. / 14.25" x 1.188" x 1.313"
WARRANTY	Three Year Warranty
VOLT/AMP WT/DIMS	12.8VDC - 1.0A .441 lb. / 14.25" x 1.188" x 1.313"

IDENTIFICATION

MC99 SERIES

Identification Light Bars

optronics

- Steel base with white finish
- Surface mount on 14-3/8" centers
- Snap-on lens, replaceable bulbs
- · Single wire, self grounding



MC99RB

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		YELLOW	
MC99AB	MC99ABP	Yellow	20
		RED	
MC99RB	MC99RBP	Red	20
	1	ACCESSORIES	
A11AB	A11ABP	Yellow replacement lens	50
A11RB	A11RBP	Red replacement lens	50
A194B	A194BP	194 replacement bulb	100
		RETAIL	
MC99AK		Yellow ID light bar, clam	6
MC99RK	Retail Ready	Red ID light bar, clam	6

↓	- 14 3/8" -	
1 3/8"		
<u> </u>		
1 7/16"	15 1/16"	

FMVSS P2

MATERIALS Acrylic lens, ABS housing, steel base

VOLT/AMP 12.8VDC - 1.0A

WT/DIMS .353 lb. / 15.063" x 1.375" x 1.438"


WARRANTY Three Year Warranty




LP11 SERIES

Snap-In Mini License Plate Lights

- Chrome plated brass construction
- Easy snap-in mounting
- Replaceable bulb (67)
- Single wire, self grounding

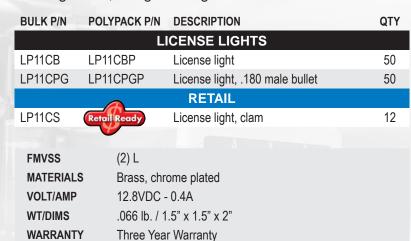





LP21 SERIES

Heavy Duty License Plate Lights




LP21CB

Armored light made of durable chrome plated steel

- Surface mount on 2" centers
- Replaceable bulb (67)
- Single wire, self grounding

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	L	CENSE LIGHTS	
LP21CB	LP21CBP	License light	50
	RETAIL		
LP21CS	Retail Ready	License light, clam	12
LP21CS6		License light, clam	6



FMVSS	L
MATERIALS	Brass, chrome plated
VOLT/AMP	12.8VDC - 0.2A
WT/DIMS	.132 lb. / 2.5" x 1.813" x 2"
WARRANTY	Three Year Warranty

LICENSE/UTILITY LIGHTS

LP31 SERIES

Mini License Plate Light

- Surface mount on 2" centers
- Replaceable bulb
- Two-wire design includes both lead and ground wire


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	LI	CENSE LIGHTS		
LP31CB	LP31CBP	License light	50	
LP31CPG	LP31CPGP	License light, .156 female barrels	50	
LPB31CPG	LPB31CPGP	License light mounted on black plastic bracket, .156 female barrels	25	
ACCESSORIES				
A194B	A194BP	194 replacement bulb	100	
RETAIL				
LP31CS	Retail Ready	License light, clam	12	


FMVSS	(2) L
MATERIALS	Brass, chrome plated bezel; stainless steel bulb socket
VOLT/AMP	12.8VDC - 0.261A
WT/DIMS	.088 lb. / 2.563" x 1.25" x 1" (light only)
WARRANTY	Three Year Warranty







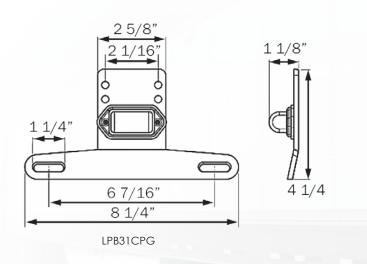



optronics



LP41CB



LP41 SERIES

Stud Mount License Plate Light

- Chrome plated cover, black base
- Stud mount on 1-3/4" centers
- Replaceable bulb
- Single wire, self grounding

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	LI	CENSE LIGHTS	
LP41CB	LP41CBP	License light	50
	1	ACCESSORIES	
A194B	A194BP	194 replacement bulb	100
		RETAIL	
LP41CS	Retail Ready	License light, clam	12
LP41CS6		License light, clam	6
FMVSS	L		
MATERIALS	Brass, chro	ome plated	
VOLT/AMP	12.8VDC -	0.2A	
WT/DIMS	.11 lb. / 2.6	625" x 1.563" x 2.188"	
WARRANTY	Three Yea	r Warranty	

optronics




Surface Mount License Plate Light



LP51CB





- Gray coated cover, stainless steel mounting base
- Stud mount on 3-1/4" centers
- Replaceable bulb
- · Single wire, self grounding

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
LICENSE LIGHTS			
LP51CB	LP51CBP	License light	20
ACCESSORIES			
A194B	A194BP	194 replacement bulb	100

FMVSS L

MATERIALS Stainless steel mounting base, plastic cover

VOLT/AMP 12.8VDC - 0.2A

WT/DIMS .309 lb. / 4" x 1.75" x 2.313"

WARRANTY Three Year Warranty

LP52/54 SERIES

License Plate Light with Bracket

- Light features gray coated cover, stainless steel mounting base; bracket is steel with black finish
- Surface mount on 3.5" centers, hardware included
- Replaceable bulb






BULK P/N	POLYPACK P/N	DESCRIPTION	QIY	
	LICENSE LIGHTS			
LP52CB	LP52CBP	License light, single wire	10	
LP54CB	LP54CBP	License light, two-wire	10	
		ACCESSORIES		
LP52HP	LP52HPP	Mounting hardware	100	
A194B	A194BP	194 replacement bulb	100	

LINIA99	L
MATERIALS	Stainless steel mounting base, plastic cover, steel bracket

VOLT/AMP 12.8VDC - 0.2A **WT/DIMS** .309 lb. / 8.5" x 2.875" x 2.375"

WARRANTY Three Year Warranty



LP55 SERIES

License Plate Light with Bracket

- Light features gray coated cover, stainless steel mounting base; bracket is black heavy duty plastic
- Surface mount on 6-7/16" centers
- Includes both lead and ground wires
- Replaceable bulb (67)





LP55CB

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	L	ICENSE LIGHTS	
LP55CB	LP55CBP	License light	10


FMVSS L

MATERIALS Stainless steel mounting base, plastic cover, plastic bracket

VOLT/AMP 12.8VDC - 0.2A

WT/DIMS .176 lb. / 8.625" x 3.25" x 2.313"


WARRANTY Three Year Warranty



Gptronics



LP56CB



LP56 SERIES

Surface Mount License Plate Light

- Surface mount with included adhesive
- Replaceable bulb (67)
- Single wire, self grounding

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	LI	ICENSE LIGHTS	
LP56CB	LP56CBP	License light	50
FMVSS	L		
MATERIALS	Gray plast	ic housing	
VOLT/AMP	12.8VDC -	· 0.2A	
WT/DIMS	.11 lb. / 2.6	625" x 1.625" x 2"	
WARRANTY	Three Yea	r Warranty	



LP65 SERIES


Sealed License Plate Light



LP65CB



11/4"



- Sonically sealed, waterproof
- Multiple mounting and wiring options

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	L	ICENSE LIGHTS	
LP65CB	LP65CBP	License light	50
	1	ACCESSORIES	
A65B	A65BP	Black bracket	50
A65P	A65PP	Single wire plug, .156 male bullet	50
A65PB	A65PBP	Kit: A65B black bracket & A65P plug	50
A66PB	A66PBP	Kit: Gray bracket & A65P plug	50
A67CB	A67CBP	Kit: Chrome bracket & A65P plug	50
A68PB	A68PBP	Kit: Black bracket & 2-wire plug	50
For more details on mounting and wiring accessories, see Accessories section at back of catalog.			
		RETAIL	
LP65CS	Retail Ready	License light, clam	12

FMVSS L

MATERIALS Polycarbonate lens and housing

VOLT/AMP 12.8VDC - 0.656A

WT/DIMS .066 lb. / 3.938" x 1.25" x 0.875"

WARRANTY Three Year Warranty

LP71 SERIES

Chrome License Plate Light


- Chrome-plated brass and steel housing
- Mount on 2-5/8" centers
- Replaceable bulb (67)
- Single wire, self grounding
- Two units required for legal license illumination

BULK P/N	POLYPACK P/N	DESCRIPTION		QTY
	L	ICENSE LIGHTS		
LP71CB	LP71CBP	License light		25
		RETAIL		
LP71CS	Retail Ready	License light, clam		12
FMVSS	(2) L			
MATERIAL	S Brass and	stainless steel housing		
VOLT/AMP	VOLT/AMP 12.8VDC - 0.2A			
WT/DIMS	.058 lb. / 3	3.375" x 2.375" x 2.188"		
WARRANT	Y Three Yea	r Warranty		





LP71CB



LP81 SERIES

Surface Mount License Plate Light

- Surface mount on 3-7/16" centers
- Replaceable bulb
- Includes both lead and ground wires
- Available in standard black and optional gray color

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	L	ICENSE LIGHTS	
LP81BB	LP81BBP	License light, black housing	50
LP81BPG	-	License light, black housing, .180 male plug on power, eyelet on ground	50
LP81GB	-	License light, grey housing	50
	1	ACCESSORIES	
A194B	A194BP	194 replacement bulb	100
FMVSS	L		


MATERIALS Polycarbonate housing **VOLT/AMP** 12.8VDC - 0.2A

WT/DIMS .11 lb. / 4" x 1.563" x 2.625" **WARRANTY** Three Year Warranty






LP81BB



LP97 SERIES

Sealed License/Utility Light



Terminal is two .156 female barrels



BULK P/N	POLYPACK P/N	DESCRIPTION	QIY	
	LICENSE LIGHTS			
LP97CB	LP97CBP	License light	50	
	1	ACCESSORIES		
A46PB	A46PBP	Straight PL-10 plug, 6" lead	100	
A86PB	A86PBP	Straight PL-10 plug, 18" lead	100	

1 1/4"	5 I	
$(\Diamond H \square H \Diamond) I$	2 3/8"	
	2 3/3	
- 23/4" -		

FMVSS

MATERIALS Polycarbonate lens and housing

12.8VDC - 0.2A **VOLT/AMP**

WT/DIMS .11 lb. / 3.375" x 1.25" x 2.375"

WARRANTY Three Year Warranty



LP95CBF

BULK P/N

WARRANTY

Sealed Stud Mount License/Utility Light



LP95CBF

- Sonically sealed, waterproof
- Design includes both lead and ground wires with .180 female barrels

POLYPACK P/N DESCRIPTION

Three Year Warranty

		¥
	11/16"	1"
2 1/16"		1

LICENSE/UTILITY LIGHTS		
LP95CBF -	License/utility light	50
MATERIALS	Polycarbonate lens and housing, stainless steel base	
VOLT/AMP	12.8VDC - 0.2A	
WT/DIMS	.066 lb. / 2.063" x .688" x 1"	

QTY

LICENSE/UTILITY LIGHTS

LP91 SERIES

Sealed License/Utility Light

- Sonically sealed, waterproof
- Multiple mounting and wiring options

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	LICEN	SE/UTILITY LIGHTS	
LP91CB	LP91CBP	License/utility light	50
LP26SKB	LP26SKBP	Kit: LP91CB, LP25SGGB, gasket, .180 male bullets on power and ground	50
	LICEN	SE LIGHT BRACKET	
LP25SB	LP25SBP	Vertical bracket, black coated	100
	Į.	ACCESSORIES	
A25GB	A25GBP	Gasket	100
A46PB	A46PBP	2-wire plug, 6" lead	100
A86PB	A86PBP	2-wire plug, 18" lead	100
A91LW	A91LWP	1-wire plug, 12" lead	100
A91BB	A91BBP	Black base, self grounding	100
A91BOB	A91BOBP	Black base, open back	100
A91CB	A91CBP	Chrome base, self grounding	100
A91OB	A91OBP	Chrome base, open back	100
A91GB	A91GBP	Grommet	100
LP25SB	LP25SBP	Black vertical bracket	100
LP25SGGB	LP25SGGBP	Grey vertical bracket	100
	—	RETAIL	
LP91CS	Retail Ready	License light, clam	12
MATERIALS VOLT/AMP WT/DIMS WARRANTY	12.8VDC - 0.2A .066 lb. / 2.5" x 1.1885" x 0.875"		






LP91CB 1 3/16" -2 1/2"



LP26SKB










UL94CB



UL94 SERIES

Sealed Stud Mount License/Utility Light

- Sonically sealed, waterproof
- Polycarbonate housing, stainless steel base, clear lens
- Single wire design grounds through mounting hardware

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
LICENSE/UTILITY LIGHT			
UL94CB	UL94CBP	License/utility light	50
MATERIALS	LS Polycarbonate lens and housing, stainless steel base		nless steel base
VOLT/AMP	12.8VDC - 0.2A		
WT/DIMS	.088 lb. / 2.125" x 1.125" x 1.063"		
WARRANTY	ITY Three Year Warranty		



UL53 SERIES

2" Sealed Utility Light

- Sonically sealed, waterproof
- Accepts standard two-pin PL-10 plug


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	Į.	JTILITY LIGHT	
UL53CB	UL53CBP	Utility light	100/50
	ACCESSORIES		
A46PB	A46PBP	Straight plug, 6" lead	100
A86PB	A86PBP	Straight plug, 18" lead	100
A54GB	A54GBP	2" Flush mount grommet	100
A54GK	A54GKP	2" Kit: A54GB and A46PB	100
A55CB	A55CBP	2" Chrome trim ring	20
BK5557GB	BK5557GBP	Cam-on mounting bracket	50
MATERIALS	Polycarbor	nate lens and housing	

2"
11/16



Gptronics

UL53CB



UL56 SERIES

VOLT/AMP

WARRANTY

WT/DIMS

2.5" Sealed Utility Light

12.8VDC - 0.6A

.044 lb. / 2" x 2" x .688"

Three Year Warranty

- Sonically sealed, waterproof
- Accepts standard two-pin PL-10 plug
- Flush mount design with flange sealed to light

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
UTILITY LIGHT			
UL56CB	UL56CBP	Utility light	100/50
ACCESSORIES			
A46PB	A46PBP	Straight plug, 6" lead	100
A86PB	A86PBP	Straight plug, 18" lead	100

MATERIALS	Polycarbonate lens and housing
VOLT/AMP	12.8VDC - 0.6A
WT/DIMS	.044 lb. / 3.438" x 3.438" x .0938'
WARRANTY	Three Year Warranty








UL97 SERIES

Sealed Utility Light Bar



- Sonically sealed, waterproof
- Polycarbonate lens and housing, stainless steel base
- Single wire design grounds through mounting hardware
- Plug-n-go connector

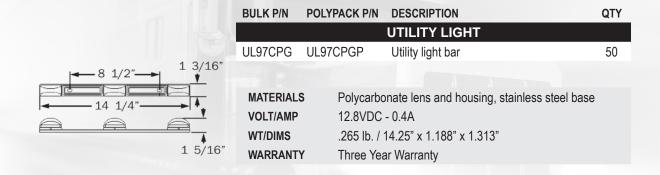



IL21 SERIES

Interior Dome Light

- Surface mount dome light with or without on/off switch
- Mounts on 3-1/2" centers
- · Includes both lead and ground wire
- Replaceable bulb (1156)


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	IN	ITERIOR LIGHTS	
IL21CB	IL21CBP	Interior light with switch, two-wire	50
IL21CPG	-	Interior light with switch, single wire with .180 male bullet	50
RETAIL			
IL21CS	Retail Ready	Interior dome light with switch, clam	12
IL21CS6		Interior dome light with switch, clam	6

MATERIALS	Polycarbonate lens, steel base plate
VOLT/AMP	12.8VDC - 2.4A
WT/DIMS	.309 lb. / 4.563" x 2.5" x 1.75"
WARRANTY	Three Year Warranty





IL21CB




IL31CS

Porch or Cabin Light

- Surface mount light with on/off switch
- Aluminum base, durable plastic lens
- Single wire design grounds through mounting hardware
- Replaceable bulb (1156)

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		RETAIL	
IL31CS	Retail Ready	Porch/cabin light, clam	6
MATERIALS	Plastic len	s, aluminum housing	
VOLT/AMP	12.8VDC -	- 2.2A	
WT/DIMS	.375 lb. / 5	5.125" x 5.125" x 1.813"	
WARRANTY	Three Yea	r Warranty	











Dome Light with Switch





- · Single wire design grounds through mounting hardware
- Replaceable bulb (1141)



BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		DOME LIGHT	
IL61CB	IL61CBP	Dome light	50
MATERIALS	Plastic lens	s, aluminum housing	
VOLT/AMP	12.8VDC -	0.4A	
WT/DIMS	.221 lb. / 5	.875" x 5.875" x 1.5"	
WARRANTY	Three Year	r Warranty	

optronics


IL91 SERIES

6" Steel Dome Light



- Surface mount steel base, chrome plated
- · Includes both lead and ground wires
- Replaceable bulb (1141)

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		DOME LIGHT	
IL91CB	IL91CBP	Dome light	50
MATERIALS	Polycarbor	nate lens, steel housing	
VOLT/AMP	12.8VDC -	0.4A	
WT/DIMS	.485 lb. / 6	.438" x 6.438" x 1.75"	
WARRANTY	Three Year	· Warrantv	



HALOGEN LIGHTS

QH16CTS & QH36CTS

55W Halogen Area Lights

- Area lights with post mount bases
- 12V 35W H3 halogen bulb
- Include both lead and ground wires
- QH36CTS has multi-directional bracket that adjusts both horizontally and vertically and stainless steel hardware

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		AREA LIGHT	
QH16CTS	QH16CTSP	Post mount area light	50
QH36CTS	QH36CTSP Multi-directional post mount area light with stainless steel hardware		50
		RETAIL	
A700	12V 55W H3 qu	artz halogen bulb, clam	12
MATERIALS Plastic housing, glass lens			
VOLT/AMP 12.8VDC - 4.5A			
WT/DIMS 0.663 lb. / 5.875" x 3" x 2.75"			
WARRANTY	Three Yea	ar Warranty	





QH16CTS



QH36CTS

TL10 SERIES

5" Work Lights, Rubber Housings

- Utility/work/ag light with shock proof rubber housing
- #4411 sealed beam
- Include both lead and ground wires
- Steel bracket, 5/16" mounting post

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	WORK/UTILITY/AG LIGHTS			
TL10CB	TL10CBP	12V, 2-wire	25	
TL11CPG	-	12V, self grounding, .180 male bullet	25	
	RETAIL			
TL10CS	12V Work/utility/	/ag light, clam	6	
TL106CS	6V Work/utility/a	ng light, clam	6	
TL10SS	12V Work/utility/	/ag light, stainless steel bracket, clam	6	
TL12CS	12V Work/utility/	/ag light, recessed bulb, clam	6	

MATERIALS	Rubber housing, glass lens, steel bracket
VOLT/AMP	12.8VDC - 2.8A
WT/DIMS	1.235 lbs. / 4.75" x 4.75" x 2.5"
WARRANTY	Three Year Warranty

Gptronics






TL35/46 SERIES

55W Rectangular Utility/Ag Lights



TL35FS/TS

- Utility/ag light with heavy duty plastic housing 12V 55W H3 halogen bulb
- Include both lead and ground wires
- Adjustable, steel mounting bracket

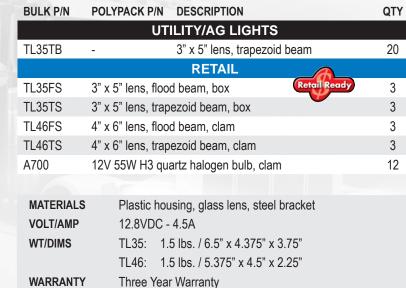



TL46FS/TS

optronics



RB10A **Magnet Mount Rotary Beacon**

- 12V rotary beacons for magnet mount
- 10-ft coil cord with power plug
- Replaceable bulb

BULK P/N	DESCRIPTION	Q [*]	TY
	RETAIL		
RB10A	Yellow rotary beacon, clam	Retail Ready	ô

MATERIALS	Acrylic lens
VOLT/AMP	12.8VDC - 1.45A
WT/DIMS	1.6 lb. / 4.75" x 4.75" x 5.25"
WARRANTY	Three Year Warranty

HALOGEN LIGHTS

DL16 SERIES

55W Docking Lights

- Docking light with heavy duty plastic housing, glass lens
- 12V 55W H3 halogen bulb
- Includes both lead and ground wires with male bullets
- Stainless steel mounting bracket with rubber cover
- Kits include two lights, wiring, mounting hardware and switch





BULK P/N	POLYPACK P/N DESCRIPTION	QTY
	RETAIL	
DL16CC	Kit, black housing, clam	3
DL16WC	Kit, white housing, clam	3
A700	12V 55W H3 quartz halogen bulb, clam	12



MATERIALS Plastic housing, glass lens, stainless steel bracket VOLT/AMP 12.8VDC - 4.5A

WT/DIMS 0.663 lb. / 5.875" x 3" x 2.75" **WARRANTY** Three Year Warranty

DL55 SERIES55W Marine Flood Lights

- Flood light with heavy duty plastic housing, glass lens
- 12V 55W H3 halogen bulb

WARRANTY

- Includes both lead and ground wires
- · Stainless steel mounting bracket

BULK P/N	POLYPACK P/N DESCRIPTION		QTY
	RETAIL		
DL55CS	55W marine flood light, clam	Retail Ready	6
A700	12V 55W H3 quartz halogen bulb, clam		12

MATERIALS Plastic housing, glass lens, stainless steel bracket

VOLT/AMP 12.8VDC - 4.5A

WT/DIMS 1.333 lb. / 6.25" x 4.25" x 3"

Three Year Warranty






DL55CS





RVSTL10/11 SERIES LED RV Combination Tail Lights





Driver side light includes LED license plate illuminator and mounting bracket


Lifetime LED Warranty

Hard wired, ground wire included






BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
ı	RED STOP/TU	IRN/TAIL LIGHT - 6 DIODES	
RVSTL10	RVSTL10P	Passenger side	25
RVSTL11	RVSTL11P	Driver side, 2-LED license light	25
		RETAIL	
RVSTL10K	Retail Ready	Set: RVSTL10, RVSTL11, mounting hardware, clam	2
FMVSS	S2 T2 I6 A L		
MATERIALS	Acrylic lens	and plastic housing	
VOLT/AMP	12.8VDC - S	Stop/Turn .117/Tail .053	
WT/DIMS	RVSTL10: .44	4 lbs / 5.9" x 5.61" x 1.33"	
	RVSTL11: .47	75 lbs / 8" x 7" x 1.33"	



WARRANTY





RVSTL20/21 SERIES

LED RV Combination Tail Lights

- Combination stop/turn/tail light for surface mount
- Low profile, oblong arched design
- Driver side lights include LED license plate illuminator and mounting bracket
- Hard wired, ground wire included





RVSTL20

BULK P/N	POLYPACK P/N	DESCRIPTION	QIY			
	RED STOP/TURN/TAIL LIGHT - 6 DIODES					
RVSTL20	RVSTL20P	Passenger side	25			
RVSTL21	RVSTL21P	Driver side, with 2-LED license light	25			
		RETAIL				
RVSTL20K	Retail Ready	Set: RVSTL20, RVSTL21, mounting hardware, clam	2			




MATERIALS Acrylic lens and plastic housing


VOLT/AMP 12.8VDC - 0.117A Stop/Turn, .053A Tail WT/DIMS RVSTL20: .418 lbs / 7.50" x 3.77" x 1.29" RVSTL21: .468 lbs / 7.5" x 5.02" x 1.29"

WARRANTY Lifetime LED Warranty

















LED Low Profile RV Combination Tail Lights



Driver side lights include 3-LED license plate illuminator and mounting bracket

DESCRIPTION

Passenger side, white base

Driver side, white base,

3-LED license light

LED RV COMBINATION TAIL LIGHTS - 9 DIODES

Snap-on, replaceable lens

BULK P/N

RVSTL60

RVSTL61

RVSTLB61FS

- Available with white or black base
- Hard wired, ground wire included

RVSTL60P

RVSTL61P

POLYPACK P/N



RVSTL60 **RVSTLB60**







RVSTLB60	RVSTLB60P	Passenger side, black base
RVSTLB61	RVSTLB61P	Driver side, black base, 3-LED license light
	AC	CESSORIES
RV60BK	RV60BKP	Wedge base, white
RV60BBK	RV66BBKP	Wedge base, black
AST60B	AST60BP	Replacement lens, passenger side
AST61B	AST61BP	Replacement lens, driver side
		RETAIL
RVSTL60S	Passenger side,	white base, clam
RVSTL61S	Driver side, white	base, clam Retail Ready
RVSTLB60FS	Passenger side, I	black base, clam



FMVSS A S2 T2 I6 **MATERIALS** Acrylic lens and plastic housing 12.8VDC - .243A Stop/Turn, .046A Tail VOLT/AMP WT/DIMS RVSTL60: .419 lb. / 8.625" x 3.188" x 2.25" RVSTL61: .419 lb. / 8.625" x 5" x 2.25" WARRANTY Lifetime LED Warranty

Driver side, black base, clam

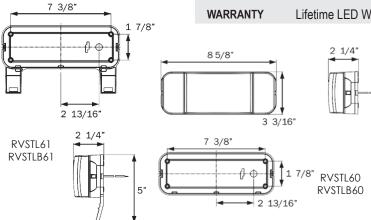



QTY

48

48

48 48

6

6 6




RV COMBINATION TAIL LIGHTS


RVSTL0060/61 SERIES

ONE™ LED Series RV Combination Tail Lights

- ONE™ LED Combination stop/turn/tail light with built-in reflex
- Driver side lights include LED license plate illuminator and mounting bracket
- Surface mount design with snap-on lens
- Available with white or black base
- · Hard wired, ground wire included

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY			
ONE	ONE™ LED RV COMBINATION TAIL LIGHTS					
RVSTL0060	RVSTL0060P	Passenger side, white base	48			
RVSTL0061	RVSTL0061P	Driver side, white base	48			
RVSTLB0060	RVSTLB0060P	Passenger side, black base	48			
RVSTLB0061	RVSTLB0061P	Driver side, black base	48			
	ACCE	SSORIES				
RV60BK	RV60BKP	Wedge base, white	100			
RV60BBK	RV66BBKP	Wedge base, black	100			
RETAIL						
RVSTL0060RFK	Set: pair of tail lig	hts, white base, clam RetailReady	2			

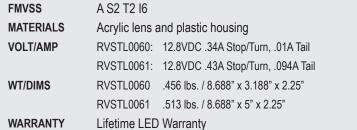



















Gptronics












RVST60/61 SERIES

Low Profile RV Combination Tail Lights

- Combination stop/turn/tail light for surface mount
- Driver side lights include license plate illuminator and mounting bracket
- Snap-on lens and replaceable bulb
- · Available with white or black base
- · Hard wired, ground wire included

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
	RV COMBINATION TAIL LIGHTS				
RVST60	RVST60P	Passenger side RV tail light, white base	48		
RVST61	RVST61P	Driver side RV tail light, white base	48		
RVSTB60	RVSTB60P	Passenger side RV tail light, black base	48		
RVSTB61	RVSTB61P	Driver side RV tail light, black base	48		
		ACCESSORIES			
RV60BK	RV60BKP	Wedge base, white	100		
RV60BBK	RV66BBKP	Wedge base, black	100		
AST60B	AST60BP	Replacement lens, passenger side	10		
AST61B	AST61BP	Replacement lens, driver side	10		
A1157B	A1157BP	1157 replacement bulb	50		
		RETAIL			
RVST60S	Passenger side,	white base, clam	6		
RVST61S	Driver side, white		6		

FMVSS	A S2 12 16
MATERIALS	Acrylic lens and plastic housing
VOLT/AMP	12.8VDC - 2.65A Stop, 2.10A Tail
WT/DIMS	RVST60: .419 lb. / 8.625" x 3.188" x 2.25"
	RVST61: .419 lb. / 8.625" x 5" x 2.25"
WARRANTY	Three Year Warranty



RECREATIONAL VEHICLE LIGHTING

RVCST90 SERIES


Streamline Sealed LED Lights



- Sonically sealed, waterproof
- Assemblies include two clear lens red stop/turn/tail lights and one clear lens yellow turn signal
- · Hard wired with separate ground wire
- Durable corrosion proof housing with chrome finish

BULK P/N	POLYPACK P/N DESCRIPTION	QTY
	TAIL LIGHT ASSEMBLIES	
RVCST90BL	Left side, black housing; two clear lens red stop/tail lights, one clear lens yellow turn signal	2
RVCST90BR	Right side, black housing; two clear lens red stop/ tail lights, one clear lens yellow turn signal	2

FMVSS	STI
MATERIALS	Polycarbonate lens, plastic housing
VOLT/AMP	12.8V - Stop 1.15A/Tail 0.08A
WT/DIMS	2.0 lbs. / 12.875" x 21.875" x 1.75"
WARRANTY	Lifetime LED Warranty










RECREATIONAL VEHICLE LIGHTING









RVPLL11/13 SERIES LED Oval Porch/Utility Lights

- LED surface mount porch utility lights available with or without switch
- Black housing with snap-on lens and 16 SMD LEDs
- Available with yellow or clear lens
- · Hard wired with separate ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
Y	YELLOW PORCH LIGHTS - 16 DIODES				
RVPLL11AB	RVPLL11ABP	Black housing	50		
RVPLL13AB	RVPLL13ABP	Black housing, switch	50		
C	CLEAR UTILITY	LIGHTS - 16 DIODES			
RVPLL11CB	RVPLL11CBP	Black housing	50		
RVPLL13CB	RVPLL13CBP	Black housing, switch	50		
RVPLL13CWB	RVPLL13CWBP	White housing, switch	50		
RETAIL					
RVPLL11AFS	Yellow light, black	housing, clam	12		
RVPLL11CFS	Clear light, black	housing, clam	12		

CERTIFICATION	
MATERIALS	Acrylic lens and plastic housing
VOLT/AMP	12.8VDC - Amber .295A, White .32A
WT/DIMS	0.5 lb / 6.375" x 3.312" x 1.437"
WARRANTY	Lifetime LED Warranty



RV PORCH/CABIN & SECURITY LIGHTS


RVPL1/3 SERIES

Rectangular Porch/Utility Lights

- Surface mount porch/cabin lights (CSA/UL listed)
- White housing with snap-on lens and replaceable bulb (1141)
- Available with yellow or clear lens
- · Hard wired with separate ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
YELLOW PORCH LIGHTS				
RVPL1A	RVPL1AP	Yellow porch light, no switch	50	
RVPL3A	RVPL3AP	Yellow porch light with switch	50	
	CLE	AR UTILITY LIGHTS		
RVPL1C	RVPL1CP	Clear utility light, no switch	50	
RVPL3C	RVPL3CP	Clear utility light with switch	50	
ACCESSORIES				
APL1AB	APL1ABP	Yellow replacement lens	10	
APL1CB	APL1CBP	Clear replacement lens	10	
		RETAIL Retail Ready		
RVPL3CFS	Clear utility light,		12	

CERTIFICATION	CSA/UL
MATERIALS	Acrylic lens and plastic housing
VOLT/AMP	12.8VDC - 1.4A
WT/DIMS	.419 lb. / 6.375" x 3.5" x 2.094"
WARRANTY	Three Year Warranty







RVPL1A



RVPL3A



RVPL1C



RVPL3C

GPTONICS
















RVPL5/7 SERIES Oval Porch/Utility Lights

- Surface mount porch utility lights available with or without switch
- White or black housing with snap-on lens and replaceable bulb (1141)
- Available with yellow or clear lens
- Hard wired with separate ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	YEL	LOW PORCH LIGHTS	
RVPL5A	RVPL5AP	Yellow porch light, white housing, no switch	50
RVPL5AB	RVPL5ABP	Yellow porch light, black housing, no switch	50
RVPL7A	RVPL7AP	Yellow porch light, white housing, with switch	50
RVPL7AB	RVPL7ABP	Yellow porch light, black housing, with switch	50
	CLE	EAR UTILITY LIGHTS	
RVPL5CB	RVPL5CBP	Clear utility light, black housing, no switch	50
RVPL7C	RVPL7CP	Clear utility light, white housing, with switch	50
RVPL7CB	RVPL7CBP	Clear utility light, black housing, with switch	50
		ACCESSORIES	
APL5AB	APL5ABP	Yellow replacement lens	10
APL5CB	APL5CBP	Clear replacement lens	10
		RETAIL	
RVPL5AFS	Yellow porch ligh	nt, white housing, clam	12
RVPL7CFS	Clear utility light	, white housing, clam	12
RVPL7CBFS	Clear utility light	, black housing, clam	12
CERTIFICATIO	30.1, 3=		
MATERIALS	Acrylic ler	ns and plastic housing	
VOLT/AMP	12.8VDC	- 1.4A	

.265 lb. / 6.25" x 3.438" x 1.875"

Three Year Warranty



WT/DIMS

WARRANTY


RV PORCH/CABIN & SECURITY LIGHTS

RVSL21/31 SERIES Scare Lights

- Surface mount security lights with mounting gasket (CSA)
- Stainless steel or white housing with screw-on lens and replaceable bulb (1156)
- Hard wired with separate ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	CLEA	AR SECURITY LIGHTS	
RVSL21	RVSL21P	Scare light, stainless housing	25
RVSL31	RVSL31P	Scare light, white housing	25

CERTIFICATION	CSA
MATERIALS	Acrylic lens, metal housing
VOLT/AMP	12.8VDC - 1.4A
WT/DIMS	0.97 lb. / 8.656" x 8.656" x 1.969"
WARRANTY	Three Year Warranty







RVSL21



RVSL31





RVILL39

LED Surface Mount Interior Ceiling Light

- Surface mount ceiling light with switch
- Effective lumen output 230 lm
- Replaceable white snap-on bezel
- Dual power: use with 12VDC and 24VDC systems
- 18-gauge, 6-inch lead and ground wire



RVILL39

BULK P/N POLYPACK P/N DESCRIPTION

INTERIOR CEILING LIGHTS - 9 DIODES

QTY

RVILL39 RVILL39P Interior light with switch 10


> Raw lumen output: 280 lm Effective lumen ouput: 230 lm


MATERIALS Clear PMMA lens, ABS bezel

VOLT/AMP 12.8VDC - 0.25A

WT/DIMS .325 lb. / 7.188" x 5.188" x 1.438"

WARRANTY Lifetime LED Warranty









RECREATIONAL VEHICLE LIGHTING

RVILL40 SERIES

LED Surface Mount Interior Light



- Surface mount ceiling light with on/off switch
- Low profile design only 1" thick
- Color temperature 4500K bright white illumination
- Hard wired with separate ground wire

Effective lumen ouput: 140 lm


· Available in bulk, polypack and retail packaging



BULK P/N	POLYPACK P/N	DESCRIPTION		QTY
INTERIOR CEILING LIGHTS - 9 DIODES				
RVILL40	RVILL40P	Interior light, on/off swit	ch, 2-wire	10
		RETAIL		
RVILL40FS	Interior light, on/	off switch, 2-wire, clam	Retail Ready	12
Raw lumen output: 290 lm				



MATERIALS	Plastic
VOLT/AMP	12.8VDC - 0.3A
WT/DIMS	.02 lb. / 6.3" x 4" x 1"
WARRANTY	Lifetime LED Warranty













- Surface mount interior lights with switch (CSA)
- Single or double lights with snap-on lens
- LED technology uses 90% less energy
- Hard wired with separate ground wire


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	LED	INTERIOR LIGHTS	
RVILL33	RVILL33P	Single, on/off switch, 9 diodes	50
RVILL34	RVILL34P	Double, on/off switch, 18 diodes	25
RVILL33PB	RVILL33PBP	Single, on/off switch, .180 male bullet on power, ring terminal on ground	50
		RETAIL	
RVILL33FS	Single, on/off sw	vitch, 9 diodes, clam	6
RVILL34FS	Double, on/off sv	witch, 18 diodes, clam	6
RVILL33 lumen output (raw/effective): 460 lm / 407 lm RVILL34 lumen ouput (raw/effective): 920 lm / 815 lm			

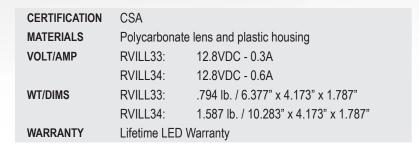










RV INTERIOR LIGHTS

RVIL35 Interior RV Light



- Snap-on lens and replaceable bulb
- · Hard wired with separate ground wire


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
INTERIOR RV LIGHTS			
RVIL35	RVIL35P	Single, on/off switch	50
	ACCESSORIES		
ARVIL35B	ARVIL35BP	Replacement lens	10
A921B	-	921 replacement bulb	50

CERTIFICATION	CSA
MATERIALS	Polycarbonate lens and plastic housing
VOLT/AMP	12.8VDC - 1.3A
WT/DIMS	.794 lb. / 6.375" x 4.125" x 1.75"
WARRANTY	Three Year Warranty






RVIL35



CPTONICS



RV Interior Lights



- Single or double lights with snap-on lens and replaceable bulb
- Hard wired with separate ground wire




RVIL21


BULK P/N	POLYPACK P/N	DESCRIPTION	QIY
RV INTERIOR LIGHTS			
RVIL21	RVIL21P	Single, on/off switch	50
RVIL22	RVIL22P	Double, on/off switch	25
		ACCESSORIES	
AIL21B	AIL21BP	Clear replacement lens	10
A921B	-	921 replacement bulb	50
		RETAIL	
RVIL21S	Single, on/off sw	ritch, clam	6
RVIL22S	Double, on/off s	witch, clam	6

CERTIFICATION	CSA / UL	
MATERIALS	Acrylic ler	s and plastic housing
VOLT/AMP	RVIL21:	12.8VDC - 0.5A
	RVIL22:	12.8VDC - 1.4A
WT/DIMS	RVIL21:	.794 lb. / 7.078" x 4.25" x 1.969"
	RVIL22:	1.587 lb. / 12" x 4.25" x 1.844"
WARRANTY	Three Yea	ar Warranty



RVIL22







RV COURTESY LIGHTS

COMPACT COURTESY LIGHTS

- Select LED or Incandescent
- Choose from surface mount and flush mount lights
- · Hard wired, include lead and ground

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	C	OURTESY LIGHTS	
16802LB	16802LBP	LED black hooded light	50
16802B	16802P	Black hooded light (bulb 194; .24A)	100
19102B	19102P	Flush mount light (bulb 194; .24A)	50

CERTIFICATION	CSA
MATERIALS	Plastic
VOLT	12.8VDC
WT/DIMS	16802B/LB: .2 lb. / 2.75" x 1.75" x 1.5"
	19102B: .2 lb. / 4.5" x 1.25"
WARRANTY	Three Year Warranty/ Lifetime LED Warranty







CHROME COURTESY LIGHTS

- Hooded lights with chrome finish, white lens
- · Hard wired, include lead and ground

WARRANTY

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	CC	DURTESY LIGHTS	
068NME	068NMEP	Snap-in light	50
068WMTE	068WMTEP	Light with stainless steel mounting plate	50

CERTIFICATION	UL
MATERIALS	Metal (068WMTE - stainless steel plate), polycarbonate lens
VOLT/AMP	12.8VDC - 0.59A (bulb 67, 12V 4CP)
WT/DIMS	068NME: .2 lb. / 1.5" x 1.5" x 2"
	068WMTE: .2 lb. / 2.75" x 1.625" x 2"

Three Year Warranty









Cotronics

WATERPROOF COURTESY LIGHT



24074B

Submersible design with gaskets

DULK DIN DOLVDAOK DIN DECODIDION

Hard wired, includes lead and ground

BULK P/N	POLYPACK P/N	DESCRIPTION	QIY
	C	OURTESY LIGHT	
24074B	24074P	Rear mount light with nut	50
CERTIFIC	ATION CSA		


WATERIALS	Plastic
VOLT/AMP	12.8VDC - 1.25A (bulb 194)
WT/DIMS	.2 lb. / 2" x 2" x 1.75"
WARRANTY	Three Year Warranty

Gatronics

OVAL COURTESY LIGHTS



Semi-recessed with clear lens













BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
COURTESY LIGHTS			
04440016B	0440016P	Charcoal finish	100
2407771C	2407771CP	Black finish, chrome reflector	50
04440013B	04440013P	Medium saddle finish	50
2407764B	2407764P	White finish	100
2407765B	2407765P	Dream white finish	50

CERTIFICATION	CSA
MATERIALS	Plastic
VOLT/AMP	12.8VDC17A (bulb 161, wedge base)
WT/DIMS	.2 lb. / 4" x 2.625" x 1.25"
WARRANTY	Three Year Warranty

RV DIRECTIONAL LIGHTS

AURORA SERIES Bullet Light

- Metal directional light with adjustable bracket and switch
- Surface mount with no exposed fasteners
- · Hard wired, include lead and ground
- Bulb 922 wedge base incandescent

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
BULLET LIGHTS			
04010040B	04010040P	Brushed nickel, black switch	30



optronics

04010040B

CERTIFICATION CSA

MATERIALS Metal housing

VOLT/AMP 12.8VDC - 0.98A (bulb 922 wedge base)

WT/DIMS .5 lb. / 2.75" x 3.75" x 4.625" **WARRANTY** Three Year Warranty

CO-PILOT LIGHTS Halogen and Incandescent

- Map lights for sidewalls, drink trays and dashboards
- Switch is incorporated into light design
- Flexible 18" arm

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	C	D-PILOT LIGHTS	
03001175B	03001175P	Halogen (5W bulb/0.35A)	10

CERTIFICATION UL

MATERIALS Metal, black finish

VOLT 12.8VDC **WT/DIMS** .6 lb. / 18"

WARRANTY Three Year Warranty





03001175B





240047171LB & 24004TR71



240147171LB & 24014TR71



GALAXY LED SERIES

LED Directional Lights

- · Recess mount lights with swivel globes and switches
- Removable snap-on trim ring, sold separately
- · Hard wired, includes lead and ground

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	LED DIREC	TIONAL LIGHTS	
240047171LB	-	LED Single fixture	50
240147171LB	-	LED Double fixture	20
24004TR71	24004TR71P	Trim ring for single fixture, black	50
24014TR71	24014TR71P	Trim ring for double fixture, black	50
CERTIFICATION	CSA		
MATERIALS	Plastic		
VOLT/AMP	Single: 12.8\	/DC - 0.020A	
	Double: 12.8\	/DC - 0.054A	
WT/DIMS	Single: .15 lb	. / 3.5" x 4.875" x 1.75"	
	Double: .31 lb	. / 3.5" x 9.625" x 1.75"	
WARRANTY	Lifetime LED W	arranty	





240047171B & 24004TR71



240147171B & 24014TR71

GALAXY SERIES

Directional Lights

- Recess mount lights with swivel globes and switches
- Removable snap-on trim ring, sold separately
- · Hard wired, includes lead and ground

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	DIRE	CTIONAL LIGHTS	
240047171B	240047171P	Single fixture	50
240147171B	240147171P	Double fixture	20
24004002B	24004002BP	Single fixture with reflector & 5W bulb	50
06001022B	06001022P	Single fixture with reflector	50
24004TR71	24004TR71P	Trim ring for single fixture, black	50
24014TR71	24014TR71P	Trim ring for double fixture, black	50
CERTIFICATIO	ON CSA		

RECREATIONAL VEHICLE LIGHTING

UNITEK LED SERIES

LED Directional Lights

- Recess mount LED fixtures with multi-locking pivoting globes that activate lights
- Removable snap-on trim ring, sold separately
- Three-terminal hook-up for dome light application

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
LED DIRECTIONAL LIGHTS			
825LED	825LEDP	Single fixture, 9 diodes, black	50
826LED	826LEDP	Double fixture, 18 diodes, black	50
825TR02	825TR02P	Single trim ring, black	50
826TR02	826TR02P	Double trim ring, black	75
826TR12	826TR12P	Double trim ring, light gray	25
826TR90	826TR90P	Double trim ring, platinum silver	25

CERTIFICATION	UL
MATERIALS	Plastic
VOLT/AMP	12.8VDC - Single 0.35A , Double 0.70A
WT/DIMS	Single: .25 lb. / 4.125" x 3.5" x 1.5"
	Double: .48 lb. / 7" x 3.875" x 1.375"
WARRANTY	Lifetime LED Warranty





825LED & 825TR02



826LED & 826TR02



UNITEK SERIES Directional Light

- Recess mount fixture with multi-locking pivoting globes that activate lights
- Removable lenses allow easy bulb replacement
- Removable snap-on trim ring, sold separately
- Three-terminal hook-up for dome light application

BULK P/N	POLYPACK P/N	I DESCRIPTION	QTY
	DIR	ECTIONAL LIGHT	
826L	826LP	Double fixture, black	48
	See comp	lete listing of trim rings above	

CERTIFICATION UL

MATERIALS Plastic

VOLT/AMP 12.8VDC 0.70A (bulb 168 wedge base)

WT/DIMS .48 lb. / 7" x 3.875" x 1.375" **WARRANTY** Three Year Warranty





826L & 826TR02



Gptronics



06001013B & 3802071BZL



06001014B & 3801071BZL

ULTRATEK SERIES Directional Lights

- · Flush mount fixtures with pivoting globes that activate lights
- Removable snap-on trim ring, sold separately
- Removable lens for easy bulb replacement
- Three-terminal hook-up for dome light application

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	DIREC	CTIONAL LIGHTS	
06001013B	06001013P	Single fixture, black	120
06001014B	06001014P	Double fixture, black	120
3802071BZL	3802071BZLP	Single trim ring, black	30
3801071BZL	3801071BZLP	Double trim ring, black	30

CERTIFICATION	CSA / NF	RTL/C / ANSI/UL
MATERIALS	Plastic	
VOLT/AMP	Single:	12.8VDC - 0.37A (bulb 590 xenon 4cp)
	Double:	12.8VDC - 0.74A (bulb 590 xenon 4cp)
WT/DIMS	Single:	.27 lb. / 3.75" x 3.5" x 1.5"
	Double:	.40 lb. / 5.875" x 3.5" x 1.5"
WARRANTY	Three Ye	ar Warranty





725022B



726022B

AUTOTEK SERIES Directional Lights

- · Low profile aircraft-style lights with switch
- · Removable grids allow easy bulb replacement
- Snap-on trim ring covers mounting screws
- Three-terminal hook-up for dome light application

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
	DIRE	CTIONAL LIGHTS			
725022B	725022P	Single fixture, black	25		
726022B	726022P	Double fixture, black	20		
CERTIFICAT	CERTIFICATION CSA/III				

CERTIFICATION	CSA / UL	
MATERIALS	Plastic	
VOLT/AMP	Single:	12.8VDC - 0.69A (bulb 906 T5 wedge base)
	Double:	12.8VDC - 1.38A (bulb 906 T5 wedge base)
WT/DIMS	Single:	.32 lb. / 4.625" x 3.5" x 2.25"
	Double:	.52 lb. / 7.625" x 3.5" x 2.25"
WARRANTY	Three Ye	ar Warranty

RV DIRECTIONAL LIGHTS

EUROPA SERIES

Directional Lights

BULK P/N

- Choose from single recess mount and single/double surface mount series with on/off switches
- Prismatic reflector globes for bright directional beams
- Easy bulb replacement (168 wedge base)

POLYPACK P/N DESCRIPTION

RECESS MOUNT				
06001072B	06001072P	Single fixture, black	20	
	SU	RFACE MOUNT		
06001026B	06001026P	Single fixture, black	20	
06001015B	06001015P	Double fixture, black	20	
06001061B	06001061P	Double fixture plus dome light, black	20	
CERTIFICATIO	ON UL/CSA			
MATERIALS	Plastic			
VOLT/AMP	Single:	12.8VDC - 0.35A (bulb 168 wedge	base)	
	Double:	12.8VDC - 0.70A (bulb 168 wedge	base)	
WT/DIMS	06001072B	3/P: .18 lb. / 4.5" x 3.75" x 1.75"		
	06001026B	s/P: .16 lb. / 4.125" x 2.937" x 1.625"		
	06001015B	s/P: .28 lb. / 2.75" x 6.25" x 1.75"		
	06001061B	s/P: .46 lb. / 8.375" x 2.75" x 1.75"		
WARRANTY	Three Year	Warranty		





06001072B

QTY







06001026B 06001015B 06001061B

EUROPA SERIESUltrabright Directional Lights

- High output for bright, directional reading light
- Easy bulb replacement (1003 bayonet base)
- Separate switches for each bulb

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	ULTRA BR	IGHT SURFACE MOUNT	
06001048B	06001048P	Single fixture, black	20
06001037B	06001037P	Double fixture, black	20
CERTIFICATION MATERIALS	N UL Plastic		
VOLT/AMP	ŭ	12.8VDC - 0.94A (bulb 1003 bayonet 12.8VDC - 0.94A (bulb 1003 bayonet	′
WT/DIMS	3	.25 lb. / 4" x 2.875" x 2.5" .47 lb. / 6.125" x 2.75" x 2.625"	
WARRANTY	Three Yea	r Warranty	





06001048B



06001037B



optronics



0601B & 060102B

ODYSSEY SERIES

Directional Light

- Recess mount light with press on/off feature at lens
- Removable snap-on trim ring, sold separately
- Hard wired, includes lead and ground

BULK P/N	POLY	PACK P/N	DESCRIPTION	QTY
	CTIONAL LIGHTS			
0601B	0601	Р	Light, black	200
060102B	0601	02P	Trim ring, black	50
CERTIFICAT	ION	CSA / NRT	ΓL/C / ANSI/UL	
MATERIALS		Plastic		
VOLT		12.8VDC -	0.94A (bulb 906 T5 wedge base)	
WT/DIMS		.26 lb. / 3.	125" x 5" x 2"	
WARRANTY		Three Yea	r Warranty	





06001001B & 06300004B

STARGAZER SERIES

Directional Lights

- Recess mount fixtures with multi-locking, pivoting globes that activate lights
- Removable snap-on trim ring, sold separately
- Removable lens for easy bulb replacement
- Three-terminal hook-up for dome light application

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	DIRE	ECTIONAL LIGHTS	
06001001B	06001001P	Single fixture, black	50
06300004B	-	Single trim ring, black	50

CERTIFICATION	CSA / NRTL/C / ANSI/UL
MATERIALS	Plastic
VOLT/AMP	12.8VDC - 0.35A (bulb 168 wedge base)
WT/DIMS	.25 lb. / 3.375" x 4" x 1.5"
WARRANTY	Three Year Warranty

RECREATIONAL VEHICLE LIGHTING

CENTURA SERIES

- Simple design with aluminum base, acrylic lens and single or dual switch
- Slim design: only 2.5" wide and 1.13" thick
- Available in 5.5" and 12.5" lengths

BULK P/N	POLYPACK P/N	DESCRIPTION		QTY
	SU	RFACE MOUNT		
105500SP	-	Single bulb, 5.5"		50
105520B	105520BP	Triple bulb, 12.5"		25
MATERIALS	Aluminum	base, acrylic lens		
VOLT/AMP	5.5":	12.8VDC - 0.97A (bulb 211)		
	12.5":	12.8VDC - 2.91A (bulb 211-2)	
WT/DIMS	5.5": .	20 lb. / 5.75" x 2.5" x 1.25"		
	12.5": .	44 lb. / 12.75" x 2.5" x 1.25"		
WARRANTY	Three Year	Warranty		



optronics

SLIMLINE SERIES

- Contemporary design with switch
- Low profile: 4" wide and only 1.5" thick
- Available in two lengths

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
SURFACE MOUNT			
18543910B	-	Single bulb, 4", no switch, white	25
18543916B	18543916BP	Single bulb, 5.5", switch, white	100

MATERIALS	Plastic
VOLT/AMP	12.8VDC - 1.0A (bulb 912)
WT/DIMS	4": .4 lb. / 4" x 4" x 1.5"
	5.5": .6 lb. / 5.5" x 4" x 1.5"
WARRANTY	Three Year Warranty















- Halogen dome light with switch for general illumination
- Designed for overhead or bulkhead surface mount
- White plastic construction with frosted lens

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	C	OOME LIGHT	
24113160B	24113160P	5.75" white dome light	30
CERTIFICATIO	N NRTL/C		
MATERIALS	Plastic		
VOLT/AMP	12.8VDC - 0).78A (bulb G4 bi-pin)	
WT/DIMS	.4 lb. / 5.75"	x 5.75" x 1.5"	
WARRANTY	Three Year	Warranty	

357B DOME LIGHT



357B

- 8.5" semi-recess mount light with one halogen and one incandescent bulb
- Chrome plated housing, Lexan lens, replaceable bulbs

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
DOME LIGHT			
357B	357P	Dome light, chrome-plated	40

MATERIALS	Metal housing, Lexan lens
VOLT/AMP	12.8VDC - 2.79A (GH9 37.5W), 0.68A (906 T5 wedge)
WT/DIMS	1.25 lbs. / 8.75" x 8.75" x 1.875"
WARRANTY	Three Year Warranty

RECREATIONAL VEHICLE LIGHTING

69000201B DOME LIGHT

- 6-3/8" surface mount light with gray base
- Two-wire, replaceable 1142 bulb

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
]	DOME LIGHT	
69000201B	69000201P	Dome light, gray base	40
VOLT/AMP	12.8VDC -	1.44A (bulb 1142)	
WT/DIMS	.75 lb. /6.25	5" x 6.25" x 2"	
WARRANTY	Three Year	Warranty	





69000300B DOME LIGHT

- 5-3/4" surface mount light with red and white bulbs
- · Dual switch, frosted lens, white housing

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		OOME LIGHT	
69000300B	69000300P	Dome light, red/white bulbs	20
VOLT/AMP	12.8VDC -	1.00A (bulb 912)	
WT/DIMS	.48 lb. / 5.7	5" x 5.75" x 1.5"	
WARRANTY	Three Year	Warranty	





193 SERIES DOME LIGHTS

- Semi-recessed design with domed clear lens
- Replaceable bulb (1003 bayonet)

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		OOME LIGHT	
193BSP	193BSPP	Dome light, black	10
193G	193P	Dome light, gray	10
MATERIALS	Steel housing	ng, polycarbonate lens	
VOLT/AMP	12.8VDC - (0.94A (bulb 1003 bayonet)	
WT/DIMS	.25 lb. / 5.7	5" x 2.688" x 1.5"	
WARRANTY	Three Year	Warranty	









RV60BBK

- Wedge base mounting bezels for RV combination tail lights
- Constructed of heavy duty, corrosion proof plastic for durability

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
MOUNTING BASES			
RV60BK	RV60BKP	Wedge base mounting bezel, white RVST60/61, RVSTL60/61, RVSTL0060/0061	100
RV60BBK	RV60BBKP	Wedge base mounting bezel, black RVSTB60/61, RVSTLB60/61, RVSTLB0060/0061	100
MATERIALS WT/DIMS WARRANTY	Plastic 8.563" x 3.1 Three Year	25" x 1.125" Warranty	





BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
WALL PLATES / ACCESSORIES			
13000018B	13000018P	Standard 12V outlet, plastic	20
014BCRCW	014BCRCWP	Chrome 12V receptacle with cap	100
7850NFRC	7850NFRCP	Chrome 12V receptacle with cap & wires	250
RC	RCP	Rubber cap for 12V outlet	500

RV ACCESSORIES

DOOR PULLS & SPRING LOADED HANDLES

- 11" door pulls with hinged end caps for easy installation
- Include steel reinforced mounting bases
- Spring loaded handle, may also be used as a clothes hanger; choose from three colors

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
DOOR PULLS			
01180071B	01180071P	Black	25
01180089B	01180089P	Fawn	25
01180090B	01180090BP	Platinum silver	25
	SPRING	LOADED HANDLES	
2500128B	2500128P	GM pewter	50
2500171B	2500171P	Black	50
2500189B	2500189P	Fawn	50

MATERIALS	Pulls: ABS, Handles: Steel base, ABS handle
WT/DIMS	Pulls: .31 lb. / 8.75" x 1.125" x 3"
	Handles: .18 lb. / 11" x 1.75" x 1"
WARRANTY	Three Year Warranty







Gptronics

ASH TRAYS







510001B

Gptronics



09017101B



BEVERAGE HOLDERS

- Versatile beverage holder for cups, cans and mugs
- Two-tier design includes a handle recess for cups and mugs, and rubber flaps to secure cans and smaller cups
- Black finish on all

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
CUP HOLDERS				
09017101B	09017101P	Dual purpose drop-in, handle cavity	50	
3202B	3202P	3" two-tier drop-in	50	
302B	302P	3" single tier drop-in	50	
1502B	1502P	1.5" single tier drop-in	50	
15202B	15202P	1.5" two-tier drop-in	50	
2409171B	2409171BP	Adjustable, fold-down	100	

REPLACEMENT BULBS RV LIGHTING


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
BULBS					
3000000B	-	12" fluorescent, cool white	1		
30031010B	-	18" fluorescent, cool white, Philips	24		
30655010B	-	10W halogen	1		


RECTANGULAR REFLECTORS


- Select from multiple shapes, sizes and mounting methods; available in bulk, polypack and retail clams
- Acrylic construction; meet FMVSS "A" for reflex when properly applied

BULK P/N POLYPACK P/N DESCRIPTION	QTY
REFLECTORS	
RE10AB RE10ABP Rectangular, yellow, self adhesive	100
RE10RB RE10RBP Rectangular, red, self adhesive	100
RE11AB RE11ABP Oblong, yellow, self adhesive/screw mount	100
RE11RB RE11RBP Oblong, red, self adhesive/screw mount	100
RE15AB RE15ABP Thinline, yellow, adhesive/screw mount	100
RE15RB RE15RBP Thinline, red, adhesive/screw mount	100
RE52AB RE52ABP Rectangular, yellow, self adhesive	50
RE52RB RE52RBP Rectangular, red, self adhesive	50
RETAIL - CLAM	
RE10AK Rectangular, yellow, self adhesive	12
RE10RK Retail Ready Rectangular, red, self adhesive	12
RE10ARFK (2) each yellow and red RE10, adhesive	12
RE12AK Oblong, yellow, self adhesive/screw mount	12
RE12RK Oblong, red, self adhesive/screw mount	12
RE12ARK (2) each yellow and red RE12	12
RE15AK Thinline, yellow, adhesive/screw mount	12
· · · · · · · · · · · · · · · · · · ·	
RE15RK Thinline, red, adhesive/screw mount	12
RE15RK Thinline, red, adhesive/screw mount RE15ARK Thinline, red & yellow, adhesive/screw mount	12 12

FMVSS	A
MATERIALS	Acrylic
WARRANTY	Three Year Warranty









4" W X 1.25" H X 0.75" D












RE13AB		RE13RB
-	3 3/16"	+










ROUND & OVAL REFLECTORS


- Select from multiple shapes, sizes and mounting methods; available in bulk, polypack and retail clams
- Acrylic construction; meet FMVSS "A" for reflex when properly applied

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		REFLECTORS	
A11AXB	A11AXBP	Yellow reflector for 3/4" lights, self adhesive	100
A11RXB	A11RXBP	Red reflector for 3/4" lights, self adhesive	100
RE13AB	RE13ABP	3" round, yellow, center mount	50
RE13RB	RE13RBP	3" round, red, center mount	50
RE21AB	RE21ABP	3" round, yellow, self adhesive	50
RE21RB	RE21RBP	3" round, red, self adhesive	50
RE35AB	RE35ABP	2" round, yellow, center mount	100
RE35RB	RE35RBP	2" round, red, center mount	100
RE37AB	RE37ABP	2" round, yellow, self adhesive	100
RE37RB	RE37RBP	2" round, red, self adhesive	100
		RETAIL - CLAM	
RE21AS		3" round, yellow, self adhesive	12
RE21RS	Retail Ready	3" round, red, self adhesive	12
RE21ARK		3" round, red & yellow, self adhesive	12
RE31AS		3" armored aluminum, yellow, screw mount	12
RE31RS		3" armored aluminum, red, screw mount	12

FMVSS	A
MATERIALS	Acrylic
WARRANTY	Three Year Warrant










RT10 SERIES

Rectangular Adhesive Tape Reflectors

- Oralite[®] V32 SAE reflectors are SAE J578 and J594 compliant
- Designed for rugged outdoor use on the sides and rear of trucks, trailers and equipment
- Meet FMVSS "A" for reflex when properly applied
- Reflector dimensions 3.5" x 2", supplied in rolls
- Select 100 or 500 reflectors per roll

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	SELF-ADHE	SIVE REFLECTORS	
RT10AB	-	Yellow 3.5"x2", roll of 100	100
RT10A1B	-	Yellow 3.5"x2", roll of 500	500
RT10RB	-	Red 3.5"x2", roll of 100	100
RT10R1B	-	Red 3.5"x2", roll of 500	500
FMVSS	Α		
MATERIAL	Polyester		
WT/DIMS	.58 lbs / 167' x 2	2.50"	
WARRANTY	Seven Year Wa	rranty	




RT21 SERIES

Round Adhesive Tape Reflectors

- Oralite® V32 SAE reflectors are SAE J578 and J594 compliant
- Designed for rugged outdoor use on the sides and rear of trucks, trailers and equipment
- Meet FMVSS "A" for reflex when properly applied
- 3" diameter, supplied in 26-ft x 4-in rolls
- 100 reflectors per roll

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
SE	LF-ADHESIVE	REFLECTORS - 7 YEAR	
RT21AB	-	Yellow 3" round	100
RT21RB	-	Red 3" round	100
FMVSS	Α		
MATERIAL	Polyester		
WT/DIMS	.55 lbs / 26' x 4	"	
WARRANTY	Seven Year Wa	arranty	

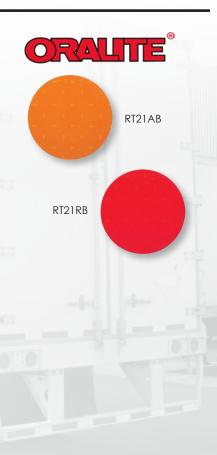

ORALITE®



RTR150711B



RT150WBD





RTR10150711CB



RTR10150WB



RTR03150711CB

VEHICLE CONSPICUITY TAPE

- Alternating red/white pattern available in 11" red/7" white and 6" red/6" white patterns
- Solid white tape also available
- All tape is 2" wide, supplied in 150-ft rolls
- Choose from V92, V82 and V42 series tape
- Marked "DOT-C2" per NHTSA 9CFR571.108

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
V92 CONSPICUITY TAPE - 5 YEAR					
RTR15066B	RTR15066BP	6" red/6" white, continuous	1		
RTR15066PB	RTR15066PBP	6" red/6" white, perforated	1		
RTR150711B	RTR150711BP	11" red/7" white, continuous	1		
RTR150711PB	RTR150711PBP	11" red/7" white, perforated	1		
RE10018T	-	100 18" strips, 11" red/7" white	1		
RT150W12B	RT150W12BP	Solid white, 12" sections on roll	1		
RT150WBD	RT150WBDP	Solid white, continuous	1		
		RETAIL			
RE418T	Retail Ready	4-strip kit, 11" red/7" white	12		
RE18T		8-strip kit, 11" red/7" white	12		
RE2018T		20-strip kit, 11" red/7" white	5		
RE21T		21-ft roll, 11" red/7" white	12		

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
V	82 CONSPICU	ITY TAPE - 10 YEAR	
RTR1015066CB	-	6" red/6" white, continuous	1
RTR10150711CB	-	11" red/7" white, continuous	1
RTR10150WB	-	Solid white, continuous	1

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
V	42 CONSPICU	ITY TAPE - 3 YEAR	
RTR03150711CB	-	11" red/7" white, continuous	1
RTR0315066CB	-	6" red/6" white, continuous	1

FMVSS	DOT-C	2
WARRANTY	V92:	Five Year Warranty
	V82:	Ten Year Warranty
	V42:	Three Year Warranty

CONSPICUITY TAPE

SCHOOL BUS CONSPICUITY TAPE OF ALLIES

- Yellow tape available in 1" and 2" widths
- All tape is supplied in 150-ft rolls
- Choose from V99 and V82 series tape
- Meets ASTM D4956-05 (Type V), FMVSS 131 & 217, CSA D250 requirements


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	V99 CONSPICE	JITY TAPE - 5 YEAR	
RT150Y1DB	RT150Y1DBP	1" yellow, diamond pattern	1
RT150Y2DB	RT150Y2DBP	2" yellow, diamond pattern	1

	V82 CONSPIC	UITY TAPE - 10 YEA	ιR
RT150Y1B	RT150Y1BP	1" yellow	1
RT150Y2B	RT150Y2BP	2" yellow	1

FMVSS ASTM D4956-05 (Type V), FMVSS 131 & 217, CSA D250

WARRANTY V99: Five Year Warranty

V82: Ten Year Warranty






VEHICLE CONSPICUITY TAPE

- Conformable sheeting for emergency vehicles
- Supplied in 6" wide, 150-ft rolls
- Choose from fluorescent lime, red and orange (other colors available upon request)
- Use red/lime sheeting to meet fire apparatus regulation NFPA 1901

_



FMVSS	NFPA 1901	
WARRANTY	Red/Orange:	Five Year Warranty
	Lime:	Three Year Warranty



RTRE150OB





HARNESS PROTECTORS

Trailer Harness Plug Protectors

- Secure and protect trailer harness plugs from damage, corrosion and debris
- Helps maintain electrical system reliability
- Easy, surface mount installation
- Corrosion proof design





BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
	PLU	G PROTECTORS		
ACP5B	ACP5BP	5-way flat harness plug protector	50	
ACP7B	ACP7BP	7-way round harness plug protector	64	
	RETAIL			
ACP5S	Retail Ready	4-way & 5-way flat plug protector, clam	10	
ACP7S	Refall Ready	7-way round plug protector, clam	5	

MATERIAL	PVC
WT/DIMS	ACP5B: .025 lbs 1.48" x 1.24" x .45"
	ACP7B .162 lbs 3.17" x 2.93 "x 2.2"
WARRANTY	Three Year Warranty









3/4" GROMMETS & BRACKETS

Grommets and Brackets for 3/4" Round Sealed Lights

- PVC grommets for flush mount of 3/4" round lights
- Snap-in mounting flange for secure installation
- Stainless steel trim ring covers grommet
- License plate light brackets for use with LPL12CB

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	GROMN	METS & BRACKETS	
A10BB	A10BBP	Surface mount base, black	100
A10GB	A10GBP	Sealing grommet	100
A11GB	A11GBP	Standard grommet	100
A11G1B	A11G1BP	Grommet, EPDM, 45-55 durometer	100
A11GSDB	A11GSDBP	Grommet, softer durometer	100
A11DB	A11DBP	Adaptor cover 2" and 2.5" holes, accepts 3/4" lights	50
A12GB	A12GBP	Sealing grommet, for material thickness .070125"	100
A14GB	A14GBP	Sealing grommet, for material thickness .1250250"	100
A11PB	A11PBP	Snap-in mounting flange	100
	REFLEC	CTORS/TRIM RINGS	
A11AXB	A11AXBP	Yellow reflector, self adhesive	100
A11RXB	A11RXBP	Red reflector, self adhesive	100
A11SSB	A11SSBP	Stainless steel trim ring	120
A11CRB	A11CRBP	Chrome finish cover	120
LICEN	ISE PLATE LIG	SHT BRACKETS/ACCESSORIE	ES
A11GLPB	A11GLPBP	License light bracket, gray	50
A11BLPB	A11BLPBP	License light bracket, black	50
A12B2LPB	A12B2LPBP	Vertical license light bracket	50
A12GLPB	A12GLPBP	Grommet for A12B2LPB bracket	50
D/M	MATERIALS	WT/DIMS	


D/N	MATERIALS	WT/DIMS
P/N	WATERIALS	W I/DINI9
A10BB	ABS	.05 lb. / 3.25" x 1.063" x .938"
A10GB	PVC	.01 lb. / 1.313" x 1.313" x .875"
A11GB	PVC	.05 lb. / 1.083" x 1.083" x.456"
A11G1B	EPDM	.05 lb. / 1.083" x 1.083" x.456"
A11GSDB	PVC	.05 lb. / 1.083" x 1.083" x.456"
A11DB	ABS	.038 lb. / 3.563" x 3.563" x .375"
A12GB	PVC	.05 lb. / 1.094" x 1.094" x .465"
A14GB	PVC	.05 lb. / 1.094" x 1.094" x .465"
A11PB	Polycarbonate	.05 lb. / 1.156" x 1.156" x 0.75"
A11SSB	Stainless steel	.05 lb. / 1.313" x 1.313" x 0.125"
A11CRB	Chrome	.01 lb. / 1.1" x 1.1" x 0.1"
A11GLPB/BLPB	Polycarbonate	.08 lb. / 2.25" x 1.375" x 0.625"
A12GLPB	PVC	.12 lb. / 3.438" x 2.688" x 2.313"
A11AXB/RXB	Acrylic	.05 lb. / 4" x 1.5" x.188"











2" GROMMETS & ACCESSORIES

Grommets, Mounting Brackets and Trim Rings for 2" Round Lights

- PVC grommet for flush mount of 2" round lights provides shock mount to lengthen bulb life
- Choice of two surface mount brackets
- Trim rings for grommet or flange mount lights, screw mount

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	MOUNT	ING ACCESSORIES	
A53GB	A53GBP	Extra-flex flush mount grommet	100
A54GB	A54GBP	Flush mount grommet	100
A54GK	A54GKP	Kit: A54GB & A46PB PL-10 plug	100
A2CBGB	A2CBGBP	Closed back grommet	50
BK5557GB	BK5557GBP	Cam-on mounting bracket	50
A55CB	A55CBP	Chrome trim ring, grommet mount	20
A3TRSSB	A3TRSSBP	Stainless steel trim ring, flange mount	100
BK53BB	BK53BBP	Branch deflector bracket, gray	50
	WIRIN	G ACCESSORIES	
A46PB	A46PBP	Two-pin plug with 6" lead, #10 terminal on ground	50
P/N	MATERIALS	WT/DIMS	

P/N	MATERIALS	WT/DIMS
A53GB	PVC	.05 lb. / 3" x 3" x 1"
A54GB	PVC	.05 lb. / 2.625" x 2.625" x 0.75"
BK5557GB	ABS	.05 lb. / 4" x 2.125" x 1"
A55CB	ABS	.05 lb. / 3.25" x 3.25" x 0.438"
A3TRSSB	Stainless steel	.05 lb. / 3.063" x 3.063" x 0.125"
BK53BB	ABS	.05 lb. / 5.375" x 2.75"







2.5" GROMMETS

Mounting Grommets for 2.5" Round Sealed Lights


- PVC grommets for flush mount of 2.5" round lights
- · Grommet provides shock mount to lengthen bulb life

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	MOUNT	ING ACCESSORIES	
A55GB	A55GBP	Open back, flush mount, black	50
A55GK	A55GKP	Kit: A55GB & A46PB PL-10 plug	100
A56GB	A56GBP	Closed back, recess mount, black	100
A57GB	A57GBP	Open back, recess mount, black	50
A57GK	A57GKP	Kit: A57GB & A46PB PL-10 plug	100
A58GB	A58GBP	Angled grommet, black	100
WIRING ACCESSORIES			
A46PB	A46PBP	PL-10 plug with 6" lead, #10 terminal on ground	100


P/N	MATERIALS	WT/DIMS
A55GB/GWB	PVC	.132 lb. / 3.5" x 3.5" x .938"
A56GB	PVC	.132 lb. / 3.25" x 3.25" x 1.125"
A57GB	PVC	.11 lb. / 3.25" x 3.25" x 1.125"
A58GB	PVC	.132 lb. / 3.438" x 3.438" x 0.875"




















2.5" BRACKETS & TRIM RINGS

Mounting Brackets and Ornamental Trim Rings for 2.5" Round Sealed Lights


- Choice of three brackets for surface mount of 2.5" round sealed lights
- Trim rings for grommet or flange mount lights, screw mount

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	MOUNT	ING ACCESSORIES	
BK55BB	BK55BBP	Black steel bracket for use with grommet; no cut-out in trailer frame required	20
BK57BB	BK57BBP	Surface mount branch deflector bracket, gray plastic	50
BK5557GB	BK5557GBP	Cam-on mounting bracket with built-in branch deflector, suitable for use with PC rated lights	50
A25TRSSB	A25TRSSBP	Stainless steel trim ring, flange mount	50
A57CB	A57CBP	Chrome trim ring, grommet mount	20

P/N	MATERIALS	WT/DIMS
BK55BB	Steel	.375 lb. / 4" x 4.75" x 1.75"
BK57BB	Polycarbonate	.066 lb. / 5.688" x 3.125" x 0.938"
BK5557GB	Plastic	.066 lb. / 4" x 2.125" x 1"
A25TRSSB	Stainless steel	.04 lb. / 3.5" x 3.5" x 0.125"
A57CB	Plastic	.11 lb. / 4" x 4" x 0.415"




A25TRSSB






A57CB





BK5557GB



1 1/16"

4" ROUND GROMMETS and BRACKETS


Mounting Grommets & Brackets for Sealed 4" Round Lights

- PVC grommets for flush mount of 45 series lights; grommet provides shock mount to lengthen life of light
- Mounting flanges for flush mount of 45 series lights; lights snap into flange
- Steel bracket mounts to trailer frame; no panel cutout required. Use with A45GB grommet. Durable powder coated finish.


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		GROMMETS	
A45GB	A45GBP	PVC grommet, flush mount	50
A46GB	A46GBP	Extra-flex PVC grommet, flush mount	50
		BRACKETS	
A45BB	A45BBP	Black plastic mounting flange	100
A45SB	A45SBP	Stainless steel mounting flange	20
BK45BB	BK45BBP	Steel mounting bracket, powder coated	10

P/N	MATERIALS	WT/DIMS
A45GB	PVC	.176 lb. / 5.375" x 5.375" x 1.063"
A45BB	Plastic	.11 lb. / 5.5" x 5.5" x 1"
A45SB	Stainless steel	.19 lb. / 5.563" x 5.563" x 0.75"
A46GB	PVC	.05 lb. / 5.625" x 5.625" x 1.063"
BK45BB	Steel	.794 lb. / 6" x 5.813" x 1.375"





















4" ROUND TRIM RINGS Trim Rings for Sealed 4" Round Lights


- Stainless steel models fit flange mount lights
- Chrome-plated plastic model fits grommet mount lights
- Trim rings mount using screws

0	Ø 5 5/8" Ø 4 15/16" Ø 3 15/16" Ø 1/4"	
120°	3	/16"


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	т	RIM RINGS	
A5TRSSB	A5TRSSBP	Stainless steel trim ring for flange mount lights	100
A45CGB	A45CGBP	Chrome-plated plastic trim ring for grommet mount lights	20
A101TRSSB	A101TRSSBP	Stainless steel trim ring for STL/BUL101 flange mount lights	50



P/N	MATERIALS	WT/DIMS
A5TRSSB	Stainless steel	.132 lb. / 5.625" x 5.625" x 0.188"
A45CGB	Plastic	.132 lb. / 5.813" x 5.813" x 0.5"
A101TRSSB	Stainless steel	.132 lb. / 5.625" x 5.625" x 0.188"







6" OVAL GROMMETS/BRACKETS


Mounting Grommets & Brackets for Sealed 6" Oval Lights

- PVC grommets for flush mount of 70 series lights; grommet provides shock mount to lengthen life of light
- Steel brackets mount to trailer frame; no panel cutout required. Use with A70GB grommet or recess flange mount lights.

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		GROMMETS	
A60GB	A60GBP	PVC grommet	50
A70GB	A70GBP	PVC grommet, flush mount	50
A70GBD	A70GBDP	PVC grommet	50
A80GB	A80GBP	PVC grommet, flush mount	50
		BRACKETS	
A77S1B	A77S1BP	Steel mounting bracket, gray	50
BK70BB	BK70BBP	Steel mounting bracket, powder coated	10
BK70B	BK70BP	Steel mounting bracket, no coating	10

P/N	MATERIALS	WT/DIMS
A60GB	PVC	.132 lb. / 7.625"x3.375"x1.125"
A70GB	PVC	.132 lb. / 7.625" x 3.375" x 1.125"
A80GB	PVC	.132 lb. / 7.625"x3.375"x1.125"
A77S1B	Steel	.132 lb. / 8.25" x 5.75" x 1.375"
BK70BB	Steel	.728 lb. / 8.25" x 4" x 1.625"
BK70B	Steel	1 lb. / 8.25" x 4" x 1.625"







HOLE CUT-OUT: 6.85" x 2.5" (1.25" R)



BK70BB











A7TRSSB





A78CB1



6" OVAL FLANGE COVERS


Trim Rings for 6" Oval Sealed Flange Mount Lights

- Choose from stainless steel, chrome-plated plastic and red reflex models
- A7TRSSB mounts to STL75AMFB flange using screws
- A78CB1 and A78RXB snap onto flange/surface mount lights
- A78RXB fulfills rear reflex function, eliminating the need for a separate reflector


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
FLANGE COVERS				
A7TRSSB	A7TRSSBP	Stainless steel, screw mount (STL75AMFB)	100	
A78CB1	A78CB1P	Chrome-plated plastic, snap-on	25	
A78RXB	A78RXBP	Red reflex, snap-on	25	
A78NCCB	A7NNBP	Paintable trim ring, snap-on	50	
A78NCCBB	A7NCCBBP	Black trim ring, snap-on	50	
A111TRSSB	A111TRSSBP	Stainless steel screw mount trim ring for STL/BUL111 flange mount lights	50	
A178TRSSB	A178TRSSBP	Stainless steel screw mount trim ring for STL178 flange mount lights	50	
A211CB1	A211CB1P	Chrome bezel, snap-on	25	
A211NCCB	A211NCCBP	Paintable trim ring, snap-on	50	
A211RXB	A211RXBP	Red reflex flange ring	25	

P/N	MATERIALS	WT/DIMS
A7TRSSB	Stainless steel	.066 lb. / 8" x 3.438" x 0.188"
A78CB1	ABS Plastic	.066 lb. / 7.875" x 3.625" x 0.5"
A78RXB	Acrylic	.066 lb. / 7.875" x 3.625" x 0.391"
A78NCCB	Plastic	.100 lb. / 7.875" x 3.625" x 0.5"
A78NCCBB	Plastic	.100 lb. / 7.875" x 3.625" x 0.5"
A111TRSSB	Stainless steel	.066 lb. / 7.625" x 3.25" x 0.25"
A178TRSSB	Stainless steel	.066 lb. / 7.563" x 3.313" x 0.188"
A211CB1	Plastic	.066 lb. / 7.5" x 3.25" x .5"
A211NCCB	Plastic	.100 lb. / 7.875" x 3.625" x 0.5"
A211RXB	Plastic	.066 lb. / 7.875" x 3.625" x 0.5"












A178TRSSB






91 SERIES GROMMETS


Mounting Grommets for A91, AL90, AL191 and AL91 Series Lights


- · PVC grommets for flush mount of 90/91 series lights
- A91G15B1 allows light to be mounted at 15 degrees

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		GROMMETS	
A91GB	A91GBP	Black grommet, flush mount	100
A91GOB	A91GOBP	Black open back grommet	100
A91G15B1	A91G15B1P	Black 15 degree angled grommet	100
A91GZB	-	Black vertical mount grommet	50
	WIR	ING ACCESSORIES	
A46PB	A46PBP	Two-wire plug, standard PL-10 connector	100

P/N	MATERIALS	WT/DIMS
A91GB/GOB	PVC	.066 lb. / 3.313" x 1.938" x 0.5"
A91G15B1	PVC	.066 lb. / 3.313" x 1.938" x 1.313"









91 SERIES BRACKETS

Mounting Brackets for A91, AL90, AL191 and AL91 Series Lights

- Corrosion proof brackets for surface mount of 90/91 series lights
- Self grounding bases ground through mounting hardware and should be used with A91LW plug
- Open back bases should be used with A46PB two-wire plug


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
SURFACE MOUNT BRACKETS			
A91BB	A91BBP	Black base, self grounding	100
A91BS	-	A91BB, retail clam	12
A91BOB	A91BOBP	Black base, open back	100
A91CB	A91CBP	Chrome base, self grounding	100
A910B	A91OBP	Chrome base, open back	100
A90CB	A90CBP	Chrome cover, snap-on	50
	WIRI	NG ACCESSORIES	
A91LW	A91LWP	Single wire plug, molded male bullet	100
A46PB	A46PBP	Two-wire plug, standard PL-10 connector	100
P/N	MATERIAL	5	
All Brackets	Plastic		

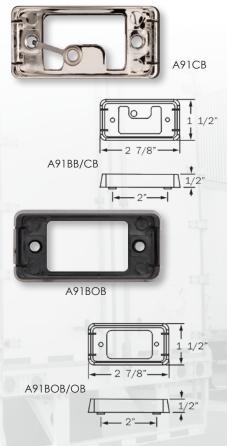









MC65/A67 SERIES BRACKETS

Mounting Brackets for MCL61 & MC/MCL65 Series Lights

- Corrosion proof brackets for surface mount of 61/65 series lights
- Single wire design grounds through mounting hardware
- Two-wire design includes both lead and ground wires
- A67BB bracket for use in exterior (top) fender applications with MC65ARB, MCL61ARB and MCL65ARB

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	SURFA	CE MOUNT BRACKETS	
A65B	A65BP	Black bracket only	50
A65PB	A65PBP	Kit: A65B & A65P single wire plug	50
A65PS	-	A65PB, retail clam	12
A65PBPG	A65PBPGP	Kit: A65B & A65P single wire plug with .180 molded male bullet	50
A65TB	A65TBP	Black bracket only, thick base	50
A66PB	A66PBP	Kit: Gray bracket & A65P single wire plug	50
A67CB	A67CBP	Kit: Chrome bracket & A65P, 12" lead	50
A67CBPG	A67CBPGP	Kit: Chrome bracket & single wire plug with .180 molded male bullet, 18" lead	50
A67P10G	A67P10GP	Kit: Chrome bracket & single wire plug with .180 molded male bullet, 10" lead	100
A68PB	A68PBP	Kit: A65B & A68P two-wire plug	50
A68P1B	A68P1BP	Kit: Tall bracket, black, with A68P two-wire plug	50
A65PRXB	A65PRXBP	Kit: Black bracket with red reflector installed & single wire plug	50
	SURFACE I	MOUNT FENDER BRACKETS	
A67BB	A67BBP	Black fender bracket with self grounding, single wire plug	50
	WI	RING ACCESSORIES	
A65P	A65PP	One-wire plug, grounds through mounting hardware	50
A68P	A68PP	Two-wire plug, includes lead and ground	50

P/N MATERIALS
All brackets Plastic



LICENSE LIGHT BRACKETS

LP25SB surface mount bracket accepts LP91 and LPL91 series lights; mounting gasket sold separately

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
LICENSE LIGHT BRACKETS			
LP25SB	LP25SBP	Black bracket for LP/LPL91 lights	100
LP25SGGB	LP25SGGBP	Grey bracket for LP/LPL91 lights	100
A25GB	A25GBP	Gasket for LP25SB	100


P/N	MATERIALS	WT/DIMS
LP25SB/GGB	Polycarbonate	.066 lb. / 3.438" x 2.688" x 2.313"
A25GB		.010 lb. / 3.438" x 1.9" x 0.70"



LP25SB




LP25SGGB







A25GB













LICENSE PLATE BRACKETS


- Select from heavy duty metal and corrosion proof plastic
- Accept stud mount license plate lights
- LP35BB license plate holder is design for mounting on flat surfaces


BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		BRACKETS	
LP5SB	LP5SBP	Black heavy duty plastic	100
LP10SB	LP10SBP	Black heavy duty plastic	50
LP15SB	LP15SBP	Zinc plated steel	12
LP20SB	LP20SBP	Powder coated steel	25
LP31SB	LP31SBP	Black heavy duty plastic for low temps	50
LP35BB	LP35BBP	Black license plate holder	25
BK31BB	BK31BBP	Black heavy duty plastic	50
		RETAIL	
LP10S		Black heavy duty plastic, clam	12
LP15S	Retail Ready	Zinc plated steel, clam	12
	-		


P/N	MATERIALS	WT/DIMS
LP5SB	Plastic	.17 lb. / 8.25" x 4.25" x .813"
LP10SB	Plastic	.17 lb. / 9.5" x 4.813"
LP15SB	Steel	.397 lb. / 8.438" x 3.625" x 1.5"
LP20SB	Steel	.132 lb. / 8.5" x 2.875"
LP31SB	Plastic - low temp	.17 lb. / 8.25" x 4.25" x .813"
LP35BB	Plastic	.122 lb. / 14.5" x 8.25"
BK31BB	Plastic	.17 lb. / 8.25" x 4.25" x .813"











MOUNTING ACCESSORIES

Trim Rings and Bezels

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	TR	IM RINGS/BEZELS	
00212317B	00212327P	M1 series chrome bezel (poly case qty: 20)	200
00212217B	00212227P	M3 series chrome bezel (poly case qty: 20)	500
00212117B	00212127P	M4 series chrome bezel (poly case qty: 20)	70
00212717B	00212727P	M5 series chrome bezel (poly case qty: 20)	500
060102B	060102P	Trim ring for Odyssey directional light, black	50
24004TR71	24004TR71P	Trim ring for Galaxy single fixture 240047171B and 240047171LB, black	50
24014TR71	24014TR71P	Trim ring for Galaxy double fixtures 240147171B and 240147171LB	50
825TR02	825TR02P	Single trim ring for Unitek directional lights 825L and 825LED, black	50
826TR02	826TR02P	Double trim tring for Unitek directional lights 826L and 826LED, black	75
826TR12	826TR12P	Double trim tring for Unitek directional lights 826L and 826LED, light grey	25
826TR90	826TR90P	Double trim tring for Unitek directional lights 826L and 826LED, platinum silver	25

P/N	MATERIALS	WT/DIMS
00212317B	Chrome	.047 lb. / 6.625" x 2.188" x .75"
00212217B	Chrome	.010 lb. / 3 "x 2" x .7"
00212117B	Chrome	.010 lb. / 9" x 3.25" x .7"
00212717B	Chrome	.010 lb. / 4.188" x 1.5" x.7"
060102B	Chrome	.010 lb. / 5" x 3.125" x 1"
24004TR71	Plastic	.010 lb. / 3.875" x 5.25" x .75"
24014TR71	Plastic	.020 lb. / 4" x 10" x .25"
825TR02	Plastic	.010 lb. / 4.875" x 3.625" x 1"
826TR02/TR12/TR90	Plastic	.20 lb. / 7.25" x 3.875" x 1"







826TR90



00212317B



00212217B



0212117B



00212717B



060102B



24004TR71



24014TR71



825TR02



826TR02





3802071BZL



3801071BZL



0630004B





A15CB/A15CGB

MOUNTING ACCESSORIES

Trim Rings and Bezels

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		BASES/BEZELS	
3802071BZL	3802071BZLP	Single trim ring for Ultratek directional light 06001013B, black	30
3801071BZL	3801071BZLP	Double trim ring for Ultratek directional light 06001014B, black	30
06300004B	06300004P	Single trim ring for Stargazer directional, black	150
A0028CRB	A0028CRBP	Chrome snap-on bezel fits MCL0028 and MCL0030 series	50
A06TR	A06TRP	White trim ring for ILL06/07	50
A09BB	A09BBP	UCL09 trim ring, black	50
A09CB	A09CBP	UCL09 trim ring, chrome	50
A09WB	A09WBP	UCL09 trim ring, white	50
A13B2B	A13B2BP	MCL/UCL13 base/bezel, black	100
A13B210B	A13B210BP	MCL/UCL13 base/bezel, matte black, fits #10 screw	100
A13C2B	A13C2BP	MCL/UCL13 base/bezel, chrome	100
A13C210B	A13C210BP	MCL/UCL13 base/bezel, chrome, fits #10 screw	100
A13NCC2B	A13NCC2BP	MCL/UCL13 base/bezel, unfinished	100
A15CB	A15CBP	MCL15 base/bezel, chrome	100
A15CGB	A15CGBP	MCL15 base/bezel, chrome with gasket	100



A06TR





A13C2B/A13C210B

A13B2B/A13B210B

100	

A13NCC2B





A15CB/CGB

ABS

P/N	MATERIALS	WT/DIMS
3802071BZL	Plastic	.010 lb. / 3.875" x 3.625" x .1875"
3801071BZL	Plastic	.020 lb. / 6.125" x 3.625" x .1875"
06300004B	Plastic	.10 lb. / 3.625" x 4.375" x 1.25"
A0028CRB	Plastic	.010 lb. / 4" x 2" x .70"
A06TR	ABS	.06 lb. / 11" x 4" x .25"
A09BB/CB/WB	ABS	.06 lb. / 3.421" x 3.421" x .287"
A13B2B/B210B	ABS	.088 lb. / 3.236" x 1.791" x .43"
A13C2B/C210B	Plastic	.088 lb. / 3.236" x 1.791" x .43"
A13NCC2B	Plastic	.088 lb. / 3.25" x 1.791" x .43"

.088 lb. / 3.938" x 1.374" x .5"

MOUNTING ACCESSORIES

Trim Rings, Bases and Bezels

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	TR	IM RINGS/BEZELS	
A17CB	A17CBP	Chrome bezel for MCL17 series marker/clearance light	100
A19CB	A19CBP	Chrome bezel for MCL19 series marker/ clearance light	100
A21CHB	A21CHBP	ILL21 bezel, chrome	25
A41CBB	A41CBBP	UCL41B bezel, black	50
A41CRB	A41CRBP	UCL41B bezel, chrome	50
A48CB	A48CBP	MCL48 & MCL73 bezel, chrome	50
A64BB	A64BBP	STL64/264 base/bezel, black	50
A64CRB	A64CRBP	STL64/264 base/bezel, chrome	50
A68SSB	A68SSB	Stainless steel snap-on trim ring for STL68RB	20
A69CB	A69CBP	STL69 & MCL70 base/bezel, chrome	10
A69NCCB	A69NCCBP	STL69 & MCL70 base/bezel, unfinished	50
A69RXCB	A69RXCBP	STL69RRXB base/bezel, chrome	10









P/N	MATERIALS	WT/DIMS
A17CB	Plastic	.010 lb. / 4.188" x 1.375" x 0.625"
A19CB	Plastic	.020 lb. / 5.75" x 1.563" x.5"
A21CHB	ABS	.088 lb. / 6.313" x 6.313" x .563"
A41CBB/CRB	Plastic	.10 lb. / 8.7" x 2.95" x 1.59"
A48CB	ABS	.088 lb. / 6" x 2.25" x 1.125"
A64BB/CRB	Chrome	.20 lb. / 21.5" x 1.5" x 0.5"
A68SSB	SS	.088 lb / 10.125" x 3" x .375"
A69CB	ABS	.176 lb. / 16.313" x 1.625" x 0.813"
A69RXCB	ABS	.176 lb. / 16.313" x 1.875" x 0.813"





A69CB

A69RXCB



MOUNTING ACCESSORIES

Trim Rings, Bases and Bezels







BK66DB



BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		BASES/BEZELS	
A70ECBB	A70ECBBP	Black end cap for ILL70 series	100
A70ECCRB	A70ECCRBP	Chrome end cap for ILL70 series	100
A71CBAWN	A71CBAWNP	Chrome finish plastic base for ILL71CBAWN	10
A71CCBWAN	A71CCBWANP	Chrome finish plastic base/ bezel for ILL71CBAWN	10
A71C1BAWN	A71C1BAWNP	Chrome base for ILL71C1BAWN	25
A79CB	A79CBP	MCL78/88 and STL79/80/89/90 series base/bezel, chrome	10
A94VB	A94VP	Black steel visor for 7" warning lamps	25
BK42CB	BK42CBP	Steel mounting bracket, chrome plated	100
BK66DB	BK66DBP	Heavy duty armored base for MCL66 series lights; die cast metal	50
BK66D1B	BK66D1BP	Heavy duty armored base for MCL66 series lights; die cast metal, black finish	50



P/N	MATERIALS	WT/DIMS
A70ECCB/ECCRB	Plastic	.010 lb.
A71CBAWN	ABS	.176 lb. / 18" x 2" x 1"
A71CCBWAN	Plastic	.020 lb. / 18" x 2.125" x 1.063"
A71C1BAWN	Chrome	.10 lb. / 16.866" x 1.91" x.526"
A79CB	ABS	.176 lb. / 18.875" x 2" x 0.813"
A94VB	Steel	.81 lb. / 7.25" x 7.25" x 4"
BK42CB	Steel	.243 lb. / 5.438" x 2.375" x 1.125"
BK66DB	Metal	.132 lb. / 4.25" x 1.125" x 1.688"
BK66D1B	Metal	.132 lb. / 4.25" x 1.125" x 1.688"



A11SRB

A40SRB

BK20BB

Steel

Metal

Aluminum

WIRING ACCESSORIES

MOUNTING ACCESSORIES

Miscellaneous Mounting Grommets, **Brackets & Accessories**

- A33GB is PVC grommet for flush mount of 33/35 series lights; grommet provides shock mount to lengthen life of light
- A40SRB secures lens of ST series lights

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	GRON	MET - ST/STL33 SERIES	
A33GB	A33GBP	PVC grommet, flush mount	50
	LOCKI	NG RING - MCL11 SERIES	
A11SRB	A11SRBP	Stainless steel locking ring for MCL11S series	100
	RETEN	TION RING - ST40 SERIES	
A40SRB	A40SRBP	Snap ring for ST40 series lights	100
	BR	ACKETS - UCL SERIES	
BK20BB	BK20BBP	Bracket kit, UCL series	25
P/N A33GB	MATERIALS PVC	WT/DIMS .353 lb. / 6.25" x 4.125" x 1.625"	


.75 lb.

.05 lb. / 1.5" diameter x 0.125"

.066 lb. / 5.125" diameter x 0.125"

BK20BB





HOLE CUT-OUT: 5.453" x 3.578" (1" R)





A11SRB













A13G2B



A17GB



A66GB



A42GB



MOUNTING GASKETS Closed Cell Foam Gaskets

Closed cell foam gaskets provide weather tight seal to mounting surface

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	F	OAM GASKETS	
A13G2B	A13G2BP	MCL/UCL13 series, black	200
A15GB	A15GBP	MCL15 series, black	50
A17GB	A17GBP	MCL17 series, black	100
A32GB	A32GBP	MC32 series, white	500
A42GB	A42GBP	4" flange mount lights, black	100
A43FMBB	A43FMBBP	Gasket for STL43RBHX	50
A44GTB	A44GTBP	Thick, white	1000
A52GB	A52GBP	MCL52 series, black	100
A66GB	A66GB	MCL66 series, black	100
A69GB	A69GBP	MCL70/STL69 series, black	50
A73GB	A73GBP	STL73, non-adhesive, black	100
A76GB	A76GBP	Gasket for MCL76	100
A90GB	A90GBP	STL90, 5mm, black	50

REPLACEMENT LENSES

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	REPL	ACEMENT LENSES	
AL16RB	AL16RBP	Red tail light lens for STL16/17RB/RS and TLL16/160RK	50
AL17RB	AL17RBP	Red side marker lens for STL16/17RB/RS and TLL16/160RK	50
A2RB	A2RBP	Red side marker lens for ST2/3/4/5	25
A8RB	A8RBP	Red, tail light lens for ST/2/3/4/5/6/7/8/9	50
A9RB	A9RBP	Red side marker lens for ST6/7/8/9	50
A10R1B	A10R1BP	Red lens for RVSTL10/11	25
A11AB	A11ABP	Yellow marker lens for MC11	50
A11RB	A11ABP	Red marker lens for MC11	50
A16RB	A16RBP	Set: Red tail light lens, side marker lens for ST16/17	50
A17RB	A17RBP	Red side marker lens for ST16/17	50
A24RB	A24RBP	Red lens for ST24/25	25
A0028AB	A0028ABP	Yellow lens for MCL0028ABB	50
A0028RB	A0028RBP	Red lens for MCL0028ABB	50
A31AB	A31ABP	Yellow lens for MC31	50
A31RB	A31RBP	Red lens for MC31	50
A32AB	A32ABP	Yellow lens for MC/MCL32	10
A32RB	A32RBP	Red lens for MC/MCL32	50
A35AEB	A35AEBP	Yellow lens for MC35AEB	50
A35RB	A35RBP	Red lens for MC35	50
A36AB	A36ABP	Yellow lens for MC36	50
A36RB	A36RBP	Red lens for MC36	50
A37RB	A37RBP	Red side marker lens for ST36/37	50
A38AB	A38AB	Yellow lens for MC38	50
A38RB	A38RB	Red lens for MC38	50
A39RB	A39RBP	Red tail light lens for ST36/37	10
A40RB	A40RBP	Red lens for ST40	25
A41CB	A41CBP	Clear lens for BU41	25
A42AB	A42ABP	Yellow lens for MC42	10
A42RB	A42RBP	Red lens for MC42	10
A43RB	A43RBP	Red lens with reflex for ST42	25
A44AB	A44ABP	Yellow lens for MC/MCL44	10
A44A500B	-	Yellow lens for MC/MCL44, 500-pack	500
A44RB	A44RBP	Red lens for MC/MCL44	10
A44R500B	-	Red lens for MC/MCL44, 500-pack	500
A52AB	A52ABP	Yellow lens for ST52	25
A52RB	A52RBP	Yellow lens for ST52	25
A60RB	A60RBP	Red tail light lens for ST60	25

P/N	WT/DIMS
AL16RB	.010 lb. / 8.063" x 2.875" x .25"
AL17RB	.010 lb. / 2.813" x 2.875" x .25"
A2RB	.020 lb. / 2.75" x 2" x 1.5"
A8RB	.010 lb. / 4.563" x 4.563" x .25"
A9RB	.010 lb. / 2.75" x 2.125" x .25"
A11AB	.010 lb. / 2." x 1" x .875"
A11RB	.010 lb. / 2." x 1" x .875"
A16RB	.020 lb. / 8.063" x 2.875" x .25"
A17RB	.010 lb. / 2.75" x 2.125" x .125"
A24RB	.010 lb. / 4.313" x 4.313" x .5"
A0028AB	.010 lb. / 4" x 2" x .5"
A0028RB	.010 lb. / 4" x 2" x .5"
A31AB	.010 lb. / 4" x 2" x .75"
A31RB	.010 lb. / 4" x 2" x .75"
A32AB	.010 lb. / 4" x 2" x .5"
A32RB	.010 lb. / 4" x 2" x .5"
A35AEB	.010 lb. / 2.75" x 2" x.5"
A36AB	.010 lb. / 2.75" x 2" x .125"
A36RB	.010 lb. / 2.75" x 2" x .125"
A37RB	.010 lb. / 3.25" x 2" x .125"
A38AB	.010 lb. / 4" x 2" x .875"
A38RB	.010 lb. / 4" x 2" x .875"
A39RB	.020 lb. / 7.75" x 3.25" x .5"
A40RB	.010 lb. / 4.25" x 4.25" x .125"
A41CB	.010 lb. / 4.25" x 4.25" x .125"
A42AB	.010 lb. / 4" x 2" x .75"
A42RB	.010 lb. / 4" x 2" x .75"
A43RB	.010 lb. / 4.25" x 4.25" x .125"
A44AB	.010 lb. / 4" x 1.5" x .875"
A44A500B	.010 lb. / 4" x 1.5" x .875"
A44RB	.010 lb. / 4" x 1.5" x .875"
A44R500B	.010 lb. / 4" x 1.5" x .875"
A52AB	.010 lb. / 4.313" x 4.313" x.5"
A52RB	.010 lb. / 4.313" x 4.313" x.5"
A60RB	.020 lb. / 6.5" x 5.5" x.125"

Continued on the next page —>



REPLACEMENT LENSES REPLACEMENT LENSES

P/N	WT/DIMS
A66AB	.010 lb. / 4" x 2" x .875"
A66RB	.010 lb. / 4" x 2" x .875"
A68AB	.010 lb. / 3.5" x 1.125" x .875"
A68RB	.010 lb. / 3.5" x 1.125" x .875"
A90AB	.020 lb. / 7.125" x 7.125" x 2"
A90RB	.020 lb. / 7.125" x 7.125" x 2"
AIL21B	.010 lb. / 5.75" x 4" x 1.75"
APL1AB	.010 lb. / 5.875" x 2.5" x .625"
APL1CB	.010 lb. / 5.875" x 2.5" x .625"
APL5AB	.010 lb. / 5.5" x 2.75" x .75"
APL5CB	.010 lb. / 5.5" x 2.75" x .75"
APL11AB	.010 lb. / 5.5" x 2.75" x .75"
APL11CB	.010 lb. / 5.5" x 2.75" x .75"
ARVIL35B	.010 lb. / 4.5" x 4" x .875"
AST60B	.020 lb. / 8.625" x 3.125" x 1.875"
AST61B	.020 lb. / 8.625" x 3.125" x 1.875"

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	REPL	ACEMENT LENSES	
A66AB	A66ABP	Yellow lens for MC66	50
A66RB	A66RBP	Red lens for MC66	50
A68AB	A68ABP	Yellow lens for MC68	50
A68RB	A68RBP	Red lens for MC68	50
A90AB	A90ABP	Yellow lens for ST90AB	5
A90RB	A90RBP	Red lens for ST90AB	5
AIL21B	AIL21BP	Clear lens for RVILL21/22	10
AL9RB	AL9RBP	Red side marker lens for STL8/9	30
APL1AB	APL1ABP	Yellow lens for RVPL1/3	10
APL1CB	APL1CBP	Clear lens for RVPL1/3	10
APL5AB	APL5ABP	Yellow lens for RVPL5/7	10
APL5CB	APL5CBP	Clear lens for RVPL5/7	10
APLL11AB	APLL11ABP	Yellow lens for RVPLL11AB and RVPLL13AB	200
APLL11CB	APLL11CBP	Clear lens for RVPLL11AB and RVPLL13AB	200
ARVIL35B	ARVIL35BP	Clear lens for RVIL35/36	10
AST60B	AST60BP	Red tail passenger light lens for RVST60/61 and RVSTL0060/61	10
AST61B	AST61BP	Red driver side tail light lens for RVST60/61 and RVSTL0060/61	10
	Retail Ready	RETAIL	
A8RK		Tail and side marker lens set, clam	12
A8R		Tail light lens, clam	12
A9R		Red side marker lens, clam	12
A16R		Lens set: tail light and side marker, clam	12
A20R		Red lens for ST20/21	12
A36R		Lens set: tail light and side marker, clam	12



WIRING ACCESSORIES

SINGLE WIRE PLUG

Wiring/Molded Plug for Marker/Clearance & Utility Lights

- Molded male plug with lead wire
- For use with sealed marker/clearance and utility lights installed in self-grounding base

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	SIN	IGLE WIRE PLUG	
A91LW	A91LWP	Single wire plug, 12", .156 male	100
A91LRW	A91LRWP	Single wire plug, 7", red, .180 male	500
A61EZPG	A61EZPGP	Single wire, 9" .180 male to .156 male	100
WT	0.044 lb.		







SINGLE & TWO-WIRE PLUGS

Wiring/Molded Plug for Thinline Marker/Clearance & Utility Lights

- Standard .156 male bullet on 6" lead wire
- Molded plug fits into surface mount bracket for MC/MCL/ UL/UCL65 and MCL61 series lights
- Single wire plug grounds through mounting hardware
- Two-wire plug includes both lead and ground wire

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	MOLDED PLU	JGS FOR THINLINE LIGHTS	
A65P	A65PP	Single wire plug, 6"	50
A68P	A68PP	Two-wire plug, 6"	50
WT	Plugs weigh appro	ximately 0.044 lb. each	










2-WIRE PIGTAILS

Wiring/Molded Plugs for Single Contact Sealed Lights

- Standard two terminal plug with male pins, bare lead wire and #10 ring terminal on ground wire
- For use with back-up and utility lights



DILLIA DAL	DOLLYDA OLY DAL	PERMIT	071/
BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	TW	O-WIRE PIGTAILS	
A42PMB	A42PMBP	Weathertight pigtail, 10"	100
A45CB	A45CBP	Straight pigtail, 10"	100
A49PB	A49PBP	Right angle pigtail, 10"	100
A49PBB	A49PBBP	Right angle pigtail, 6", no eyelet on ground	100
WT	All weigh approxim	ately 0.044 lb. each	
	-E		
2 =			
0,10			



A49PB

MOUNTING HARDWARE

Mounting Hardware for Vehicle Lighting

Hardware sets for mounting vehicle lights. Components packaged separately.

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		HARDWARE	
A830B	-	(1) each: 1/4" 20 flange lock nut, 1/4" flat washer, 1/4" split lock washer; stainless steel	100
A839B	-	(1) each: 1/4" 20 flange lock nut, 1/4" flat washer, 1/4" split lock washer; zinc plated	100
BK21BB	BK21BBP	Kit: 3-piece set of mounting brackets and hardware for UCL32CDTB	2
LP52HP	LP52HPP	Mounting hardware for license plate lights; includes two each bolts, washers and weld nuts	100



2-WIRE PIGTAILS

Wiring/Molded Plugs for Sealed Marker/Clearance & Utility Lights

- Pigtails feature standard PL-10 plug with male pins; bare lead wires and #8 ring terminal on ground wire unless noted in description
- For use with sealed marker/clearance and utility lights

	(C) (C)	
AL	42PB	

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	TWO-	WIRE PL-10 PLUGS	
A12PB	A12PBP	12" adaptor, .180 male bullets to .180 female barrels	100
AL42PB	AL42PBP	MCL42 weathertight pigtail	100
AL42PG	AL42PGP	MCL42 weathertight pigtail, .180 bullets	100
AL421PG	AL421PGP	MCL42 weathertight pigtail, .180 male bullet on power, eyelet on ground	100
A42PMB	A42PMBP	Weathertight pigtail, 10"	100
A46PB	A46PBP	Straight pigtail, 6"	100
A46PBB	A46PBBP	Straight pigtail, 6", no eyelet on ground	100
A46PPG	A46PPGP	Straight pigtail, 6", male plug on power	100
A46P135B	-	Straight pigtail, 135", no ring terminal on ground wire	100
A46P75B	-	Straight pigtail, 75", no ring terminal on ground wire	100
A46P36B	-	Straight pigtail, 36", no ring terminal on ground wire	100
A86PB	A86PBP	Straight pigtail, 18"	100
		RETAIL	
A46PS	Retail Ready	Straight pigtail, 6", clam	12
WT	All weigh approxim	ately 0.044 lb. each	



ID LIGHT BAR HARNESS

Wiring/Molded Plugs for 3-pc Sealed Identification Light Bars

- Standard two terminal plugs with male pins; 65" bare lead wire and #10 ring terminal on 19" ground wire
- For use with identification light bars featuring sealed lights

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
	ID LIGHT BAR HARNESS				
A93PB	A93PBP	ID light bar harness	100		
WT	0.4 lb.				





3-WIRE PIGTAILS

Wiring/Molded Plugs for **Double Contact Sealed Lights**




- A45PB & A47PB feature standard PL-3 plug with male pins, bare lead wires and #10 ring terminal on ground wire
- For use with stop/turn/tail, parking/turn and warning lights



BU	JLK P/N	POLYPACK P/N	DESCRIPTION	QTY	
		ST	ANDARD PL-3		
A4	15PB	A45PBP	Straight pigtail,10"	100	
A4	17PB	A47PBP	Right angle pigtail, 10"	100	
A4	17PBB	A47PBBP	Straight pigtail, 10", no eyelet on ground	100	
		WE	EATHERPROOF		
A4	15PMB	A45PMBP	Weathertight plug to bare wire, 10"	50	
AL	_45PWTB	AL45PWTBP	Weathertight plug with female PL-3, 10"	50	
AL	_145PWTB	AL145PWTBP	Weathertight plug, right angle PL-3, 10"	50	
	RETAIL				
A4	15PS	Retail Ready	Straight pigtail, 6", clam	50	
A4	17PS	Keldikeddy	Right angle pigtail, 10", clam	50	



WT	All weigh approximately 0.044 lb. each	







WIRING ACCESSORIES

TRUNK & TRAILER CONNECTORS

- A10TH5B tongue extension features 5-way flat plug with one female/four male pins on one end; on other end 5-way flat plug with one male/three female pins, female barrel on blue wire
- A4TC4WB and A6TC4WB trunk connectors feature 4-way flat plug with three female/one male pins
- A18TC replacement trailer connector has one female/ three male pins; A185TC has one female/four male pins
- A48TC replacement trunk connector has one male/three female pins

6	
	A48TC



BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		CONNECTORS	
A10TH5B	A10TH5BP	5-way harness tongue extension, 10-ft	50
A4TC4WB	A4TC4WBP	4-way to bare wire, 4-ft	100
A6TC4WB	A6TC4WBP	4-way to bare wire, 6-ft	50
A6TC5B	A6TC5BP	5-way to bare wire, 6-ft.	50
		RETAIL	
A18TC	Retail Ready	4-way trailer connector, 18", clam	12
A185TC		5-way trailer connector, 18", clam	12
A48TC		4-way trunk connector, 4-ft, clam	12


7-5 WAY ADAPTORS/PLUGS

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
	7-WAY	WIRING HARNESSES	
A7W6FTB	-	7-way molded plug with 6-ft. cable	5
A7W8FTB	-	7-way molded plug with 8-ft. cable	5
	7-5	WAY ADAPTORS	
A57WB	A57WBP	5-flat to 7-round, 16" cable	25
A57CCB	A57CCBP	5-flat to 7-round , coil cord	30
A75TB	A75TBP	5-flat to 7-round, single piece	50
A7WCB	A7WCBP	7-way power plug, round	50
		RETAIL	
A57WH		5-flat to 7-round, 16" cable, clam	6
A75TC	Retail Ready	5-flat to 7-round, single piece, clam	12
A75TC6		5-flat to 7-round, single piece, clam	6





4-WAY WISHBONE STYLE WIRING HARNESSES



Split wishbone four-conductor harnesses


WIRE DESCRIPTIONS:

WHITE - GROUND BROWN - TAIL LAMPS

YELLOW - DRIVER SIDE STOP/TURN GREEN - PASSENGER SIDE STOP/TURN

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		4-WAY HARNESSES	
A20WB	A20WBP	20-ft	50
A25WB	A25WBP	25-ft	50
A25R10WB	A25R10WBP	25-ft, #10 ring terminal on ground	50
A25W42B	A25W42BP	25-ft, 42" ground wire	50
A30WB	A30WBP	30-ft	50
A30W10B	A30W10BP	30-ft, 10-ft ground wire	50
A35WB	A35WBP	35-ft	25
A35R10WB	A35R10WBP	35-ft, #10 ring terminal on ground	25
A35W42B	A35W42BP	35-ft, 42" ground wire	50
A36WRB	A36WRBP	36-ft ribbon wiring harness	25
A40W42B	A40W42BP	40-ft with tubing, 42" ground wire	25
	A	RETAIL	
A25WH	etail Ready	25-ft harness with 4-ft trunk connector, clam	6

5-WAY WISHBONE STYLE WIRING HARNESSES



Split wishbone five-conductor harnesses have fifth wire for lights or brakes

WIRE DESCRIPTIONS:

WHITE - GROUND BROWN - TAIL LAMPS

YELLOW - DRIVER SIDE STOP/TURN GREEN - PASSENGER SIDE STOP/TURN BLUE - AUXILIARY USE

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY	
		5-WAY HARNESSES		
A25W5B	A25W5BP	25-ft, 30" ground, 5-ft blue wire	25	
A30W5B	A30W5BP	30-ft, 30" ground, 5-ft blue wire	25	
A30W5BLB	-	30-ft, 40" ground, 30-ft blue wire	25	
A35W5B	A35W5BP	35-ft, 30" ground, 5-ft blue wire	25	
A40W5B	A40W5BP	40-ft, 30" ground, 5-ft blue wire	25	
	RETAIL			
A255WH	Retail Ready	25-ft harness with 4-ft trunk connector, clam	6	



REPLACEMENT BULBS

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		BULBS	
A1157B	A1157BP	1157, 14V 26.9/8.3W, 1200/5000 hour rating	100
A194B	A194BP	194 wedge base, 14V 4CP, 2500 hour rating	100
		RETAIL	
A400		Set, (1) each: 2057, 1157, 194, 168; clam	12
A700	Kerdinkeddy	12V 55W H3 quartz halogen, clam	12

ALEDRST Series

LED Load Resistor

- Upgrade from incandescent turn signals to LED models for safer, cost-efficient lights
- Makes turn signal flash at proper flash rate
- 50W, 6 ohm in-line resistor

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY		
	LOAD RESISTOR				
ALEDRST1B	ALEDRST1BP	LED load resistor with lead	50		
ALEDRST2B	ALEDRST2BP	LED load resistor with lead and female PL-3 plug	50		
VOLT/AMP	WARRANTY				
12V / 50W	Three Year W	arranty			





UCL90 SERIES CONNECTORS LED Strip Lighting Connectors

- · Connects strips of lights without soldering
- Snap-on design is quick and easy to install
- For use with UCL90/91/92 series

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		BRACKETS	
A90PB	A90PBP	Snap-on connector with leads	20
A90P1B	A90P1BP	Snap-on connector	20
MATERIA VOLT/AMI WT/DIMS WARRAN	P 12.8VD 0.01 lbs	C s. / 1" long ⁄ear Warranty	





A0116AWGBLWSB



A011AWGBRGRSB



A011AWGBRSB



A0118AWGBRYLWSB

BULK WIRE

- Bulk wire on spools
- Select from 16AWG or 18AWG in assorted colors

BULK P/N	DESCRIPTION	QTY
	BULK WIRE	
A0114AWG2BLWHSB	14AWG, White/Black, 2,500-ft. spool	1
A0114AWGBLKWHTB	14AWG, White/Black, 1,640-ft. spool	1
A0116AWGBLWSB	16AWG, Blue/White, 1,640-ft. spool	1
A0118AWGBRGRSB	18AWG Brown/Green, 1,640-ft. spool	1
A0118AWGBRSB	18AWG, Brown 2,985-ft. spool	1
A0118AWGBRYLWSB	18AWG, Brown/Yellow, 1,640-ft. spool	1
A0118AWGWHTSB	18AWG, White, 2,985-ft spool	1
A0118AWGBRYLGRB	18AWG, Brown/Yellow/Green, 1,640-ft. spool	1
A0118AWGWHT5KSB	18AWG, White, 5,000-ft spool	1
A0118AWGBR5KSB	18AWG, Brown 5,000-ft. spool	1
A0118AWGBRGR5KSB	18AWG Brown/Green, 5,000-ft. spool	1
A0118AWGRESB	18AWG, Red 5,000-ft. spool	1
A0118AWGBLSB	18AWG, Black 5,000-ft. spool	1
A0118AWGYESB	18AWG, Yellow 5,000-ft. spool	1
A0118AWGBRRE5KSB	18AWG Brown/Red, 5,000-ft. spool	1
A0118AWGGRSB	18AWG, Green, 5,000-ft. spool	1
A0118AWGRESB	18AWG, Red, 5,000-ft. spool	1



A0118AWGWHTSB



FLASHER

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY
		FLASHER	
ALEDFB	ALEDFBP	LED flasher with connectors	10
		RETAIL	
ALEDFS	Retail Ready	LED flasher with connections, clam	12

DOCUMENT HOLDER

Polycarbonate

- Twist-on cover with gasket protects documents from dirt and moisture while allowing convenient access
- Easy installation

DH55

BULK P/N	POLYPACK P/N	DESCRIPTION	QTY				
	DOCUMENT HOLDER						
DH55	DH55P	Document holder	10				
ADH55B	ADH55BP	Replacement lid	50				
P/N	MATERIALS	WT/DIMS					

0.46 lb. / 5.5" x 5.5" x 2.125"



DH55



FMVSS LIGHTING REQUIREMENTS – TRAILERS

FEDERAL LIGHTING REGULATIONS FOR TRAILERS

IMPORTANT NOTE: Every lamp, reflex reflector, and conspicuity treatment must be permanently attached in the location specified below and must comply with all applicable requirements prescribed for it by FMVSS/CMVSS 108. The face of any device on the front/rear and sides should be, repectively perpendicular and parallel to the vehicle's centerline, unless it is photometrically certified at installation angle. No part of the vehicle shall prevent any device from meeting its prescribed requirements unless an auxiliary device meeting all prescribed requirements is installed. IN CANADA: Manufacturers and importers of vehicles must have the proper certification test records demonstrating compliance of lighting components with all prescribed requirements.



RASIC FOUIPMENT REQUIRED ON ALL TRAILERS

		=====
	Transport	
1	Canada	

	DESCRIPTION SAE Lens Functional			MANDATORY REQUIREMENTS Height mm(in.)				
Area	Equipment	Coding	Purpose	Quantity	Color	Location	from the ground	
0	Tail Lamps	(T)	Indicate vehicle's presence and width	Minimum 2	Red	On the rear - symmetrical as far apart as practicable	380-1830 (15-72)	
	Stop Lamps	(S)	Indicate braking	Minimum 2	Red	On the rear - symmetrical as far apart as practicable	380-1830 (15-72)	
	Rear Turn Signal Lamps	(1)	Indicate direction of turn	Minimum 2	Red or Yellow	On the rear - symmetrical as far apart as practicable	380-2110 (15-83)	
	Rear Reflex Relectors	(A)	Indicate vehicle's presence and width	Minimum 2	Red	On the rear - symmetrical as far apart as practicable facing rearward	380-1530 (15-60)	
2	License Plate Lamp(s)	(L)	Illuminates license plate	Minimum 1	White	On the rear - above or at the sides of license plate	No requirement	
3	Rear Side Marker Lamps *photometrically certified at in	(P2, PC* or P3, PC2*) installation angle		Minimum 2	Red	Each side at rear as far back as practicable	380-1530 (15-60) no max. for veh. under 2032mm (80°) wi	
	Rear Side Reflex Relectors	(A)	Front and rear side marker lamps / side reflex reflectors	Minimum 2	Red	Each side at rear as far back as practicable facing sideward	380-1530 (15-60)	
4	Front Side Marker Lamps *photometrically certified*	(P2, PC* or P3, PC2*) at installation angle	indicate vehicle's presence and length	Minimum 2	Yellow	Each side at front as far forward as practicable	380 (15) minimum	
	Front Side Reflex Reflectors	(A)		Minimum 2	Yellow	Each side at front as far forward as practicable facing sideward	380-1530 (15-60)	

ADDITIONAL EQUIPMENT FOR TRAILERS EXCEEDING THE FOLLOWING PARAMETERS Length 9.1m (30 ft.) or longer

DESCRIPTION					MANDATORY REQUIREMENTS				
Area	Equipment	SAE Lens Coding	Functional Purpose	Quantity	Color	Location	Height mm(in.) from the ground		
6	Intermediate Side Marker Lamps	(P2 or P3)	Indicate presence of a long vehicle	Minimum 2	Yellow	Each side near center facing sideward	380 (15) minimum		
U	Intermediate Side Reflex Reflectors	(A)	Indicate presence of a long vehicle	Minimum 2	Yellow	Each side near center facing sideward	380-1530 (15-60)		


Width 2032mm (80 in.) or wider

	DESCRIPTION		MANDATORY REQUIREMENTS					
Area	Equipment	SAE Lens Coding	Functional Purpose	Quantity	Color	Location	Height	
6	Rear Clearance Lamps *photometrically certified at install	(P2, PC* or P3, PC2*) ation angle	Show vehicle's width MAY NOT be combined with tail lamps	Minimum 2	Red	At widest point - symmetrical on the rear or near the rear facing rearward	As high as practicable may be lower only if ID lamps are at the top	
0	Rear Identification (ID) Lamps	(P2 or P3)	Indicate presence of a wide vehicle	Exactly 3	Red	On the rear - center horizontally spaced 150mm (6 in.) to 300mm (12 in.) apart facing rearward	At the top - may be lower if door header narrower than 25mm	
8	Front Clearance Lamps *photometrically certified at install	(P2, PC* or P3, PC2*) ation angle	Show vehicle's width	Minimum 2	Yellow	At widest point - symmetrical on the front or near the front facing forward	As high as practicable	


Width 2032mm (80 in.) or wider AND GVWR 4536 kg (10.000 lb.) or more


DE	SCRIPTION			MAND	ATORY REQU	IREMENTS	
Area	Conspicuity Treatment	DOT Coding	Quantity	Color	Location	Height	Options
9	Rear Upper Body Markings		Exactly 2 pairs of 300mm long strips	White	On the rear upper corners facing rearward	At the top	Reflex reflectors may not be
0	Bumper Bar Marking		Continuous	Red/White	On the rear bumper bar's horizontal element full width - facing rearward	No requirement	required if they are replaced in their required location with conspicuity treatment.
0	Rear Lower Body Marking	DOT-C DOT-C2 DOT-C3 DOT-C4	Continuous	Red/White (see options)	On the rear full width of the vehicle facing rearward	As horizontal as practicable and as close as practicable to the range of 375 to 1525mm from the ground	Optional in Canad Rear lower body and side conspicuit
12	Side Marking	33, 01	(see location)	Red/White (see options)	Each side - facing sideward continuous, or evenly spaced over minimum of 50% of length starts and ends as close to the nt and rear of the vehicle as practica	As horizontal as practicable and as close as practicable to the range of 375 to 1525mm from the ground ble	treatment may also be solid white solid yellow, or white and yellow.


FMVSS LIGHTING REQUIREMENTS – TRAILERS

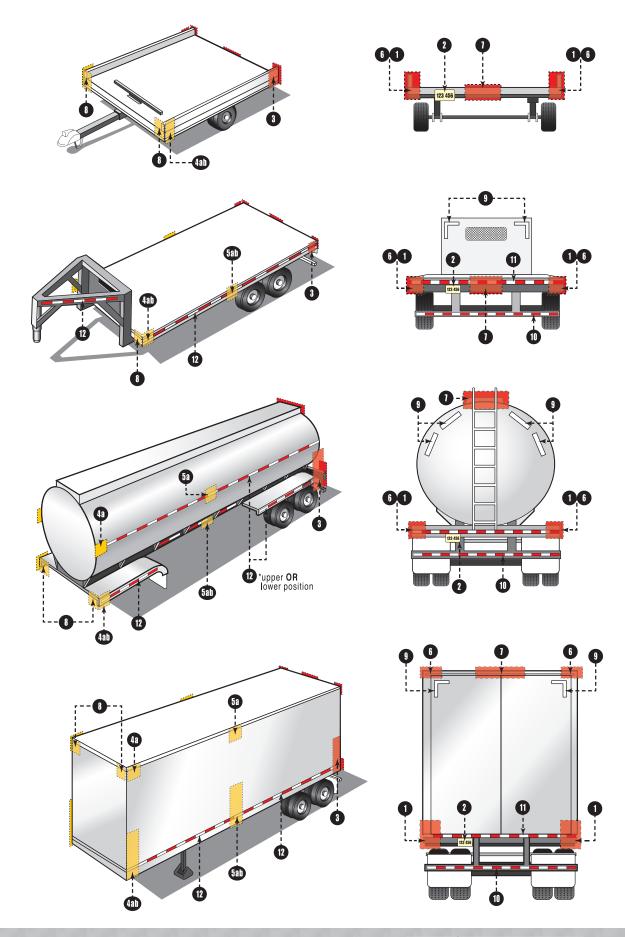



FMVSS LIGHTING REQUIREMENTS – TRAILERS



















FMVSS LIGHTING REQUIREMENTS - TRUCKS/BUSES/MPV'S

FEDERAL LIGHTING REGULATIONS FOR TRUCKS, BUSES & MPVs

IMPORTANT NOTE: Every lamp, reflex reflector, and conspicuity treatment must be permanently attached in the location specified below and must comply with all applicable requirements prescribed for it by FMVSS/CMVSS 108. The face of any device on the front/rear and sides should be, repectively perpendicular and parallel to the vehicle's centerline, unless it is photometrically certified at installation angle. No part of the vehicle shall prevent any device from meeting its prescribed requirements unless an auxiliary device meeting all prescribed requirements is installed. IN CANADA: Manufacturers and importers of vehicles must have the proper certification test records demonstrating compliance of lighting components with all prescribed

BASIC EQUIPMENT REQUIRED ON ALL TRUCKS, BUSES & MPVs

DAG		RIPTI	ON ON BUSES & MPVS	М	ANDA	TORY REQUIRE	MENTS
Area	Equipment	SAE Lens Coding	Functional Purpose	Quantity	Color	Location	Height mm(in.) from the ground
0	Headlamps - Lower Beam US requires "DOT" lettering on lens US & Canada - light source code required on	(H, HR) lens	Forward road illumination	Minimum 2	White	On the front - symmetrical as far apart as practicable If 4 lamp system - outboard or above upper beams	560-1370 (22-54)
	Headlamps - Upper Beam US requires *DOT* lettering on lens US & Canada - light source code required on	(H, HR) lens	Forward road illumination	Minimum 2	White	On the front - symmetrical If 4 lamp system - inboard or below lower beams	560-1370 (22-54)
	Parking Lamps Vehicles less than 2032mm wide	(P)	Indicate parked vehicle	Minimum 2	White or Yellow	On the front - symmetrical as far apart as practicable	380-1830 (15-72)
	Daytime Running Lamps (DRL) Canada - required / US - option US requires "DRL" lettering on lens if not hear	(Y2) dlamp	Indicate in use vehicle	Minimum 2	White or Yellow	On the front - symmetrical as far apart as practicable	380 (15) min. Max. depends on type of DRL
	Front Turn Signal/ Hazard Warning Lamps	(1)	Indicate direction of turn/ identify disabled vehicle	Minimum 2	Yellow	On the front - symmetrical as far apart as practicable	380-2110 (15-83)
2	Front Clearance Lamps Vehicles 2032mm wide or wider "photometrically certified at installat	(P2, PC* or P3, PC2*) ion angle	Show vehicle's width	Minimum 2	Yellow	At widest point - symmetrical on the front or near the front facing forward	As high as practicable
3	Front Identification Lamps (ID) Vehicles 2032mm wide or wider	(P2 or P3)	Indicate presence of a wide vehicle	Exactly 3	Yellow	On the front - center horizontally spaced 150mm (6 in.) to 300mm (12 in.) apart	As high as practicable or on top of the cab
4	Front Side Marker Lamps *photometrically certified at inst	(P2, PC* or P3, PC2*) allation angle	1	Minimum 2	Yellow	Each side at front as far forward as practicable	380 (15) minimum
	Front Side Reflex Reflectors	(A)	Front and rear	Minimum 2	Yellow	Each side at front as far forward as practicable facing sidewa	380-1530 ard (15-60)
6	Rear Side Marker Lamps** *photometrically certified at insti-	(P2, PC* or P3, PC2*) allation angle	side marker lamps / side reflex reflector indicate vehicle's presence and length	Minimum 2	Red	Each side at rear as far back as practicable	380 (15) minimum
	Rear Side Reflex Reflectors** **not required on Truck Tractors	(A)	presence and longar	Minimum 2	Red	Each side at rear as far back as practicable facing sidewar	380-1530 d (15-60)
6	Rear Clearance Lamps Vehicles 2032mm wide or wider Not required on Truck Tractors 'photometrically certified at install	(P2, PC* or P3, PC2*)	Show vehicle's width MAY NOT be combined with tail lamps	Minimum 2	Red	At widest point - symmetrical on the rear or near the rear facing rearward	As high as practicable may be lower only if rear ID lamps are at the top
0	Rear Identification (ID) Lamps Vehicles 2032mm wide or wider Not required on Truck Tractors	(P2 or P3)	Indicate presence of a wide vehicle	Exactly 3	Red	On the rear - center horizontally spaced 150mm (6 in.) to 300mm (12 in.) apart facing rearward	At the top - may be lower if door heade narrower than 25mm
8	Tail Lamps	(T)	Indicate vehicle's presence and width	Minimum 2	Red	On the rear - symmetrical as far apart as practicable	380-1830 (15-72)
	Stop Lamps	(S)	Indicate braking	Minimum 2	Red	On the rear - symmetrical as far apart as practicable	380-1830 (15-72)
	Rear Turn Signal/ Hazard Warning Lamps	(1)	Indicate direction of turn/ identify disabled vehicle	Minimum 2	Red or Yellow	On the rear - symmetrical as far apart as practicable	380-2110 (15-83)
	Rear Reflex Reflectors	(A)	Show vehicle's presence and width	Minimum 2	Red	On the rear - symmetrical as far apart as practicable	380-1530 (15-60)
9	Backup Lamp	(R)	Illuminates ground behind the vehicle and alert road users	Minimum 1	White	Rear	No requirement
Ō	License Plate Lamp(s)	(L)	Illuminates license plate	Minimum 1	White	On the rear - above or at the sides of license plate	No requirement
0	Center High Mounted Stop Lamp Vehicles less than 2032mm wide:	(U3) and 4536kg	Indicates braking	1	Red	On the rear - centerline of the vehicle	860 (34) minimum

ADDITIONAL EQUIPMENT FOR SPECIFIC VEHICLES VEHICLES 9.1m (30 ft.) LONG OR LONGER

	DE	SCRIPTIO	ON	MANDATORY REQUIREMENTS				
Area	Equipment	SAE Lens Coding	Functional Purpose	Quantity	Color	Location	Height mm(in.) from the ground	
12	a Intermediate Side Marker Lamps	(P2 or P3)	Indicate presence of a long vehicle	Minimum 2	Yellow	Each side near center	380 (15) minimum	
	Intermediate Side Reflex Reflectors	(A)	Indicate presence of a long vehicle	Minimum 2	Yellow	Each side near center facing sideward	380-1530 (15-60)	

Truck Tractors


DI	CRIPTION	MANDATORY REQUIREMENTS					
Area	Conspicuity Treatment	DOT Codi	ng Quantity	Color	Location	Height	Options
3	Rear Upper Body Markings	DOT-C	Exactly 2 pairs of 300mm long strips	White	Rear upper corners of cab facing rearward	As high as practicable excluding fairings	
•	Rear Marking	DOT-C2 DOT-C3 DOT-C4	Exactly 2 sections of min. 600mm each	Red/White	Rear - facing rearward - on fenders, on mud flap brackets, or within 300mm below the top of mud flaps	As horizontal as practicable and not higher than 1525mm from the ground	If mud flaps not used on the cab or frame mounted brackets

NOTE: The edge of red conspicuity tape shall not be closer than 75 mm to the edge of any amber lamp and the edge of while conspicuity tape shall not be closer than 75 mm to the edge of any lamp


nare information contact: Transport Canada: Motor Vehicle Safety Enforcement Branch National Highway Traffic Safety Administration: Office of Safety Performance Standards For more information contact:




FMVSS LIGHTING REQUIREMENTS – TRUCKS/BUSES/MPV'S

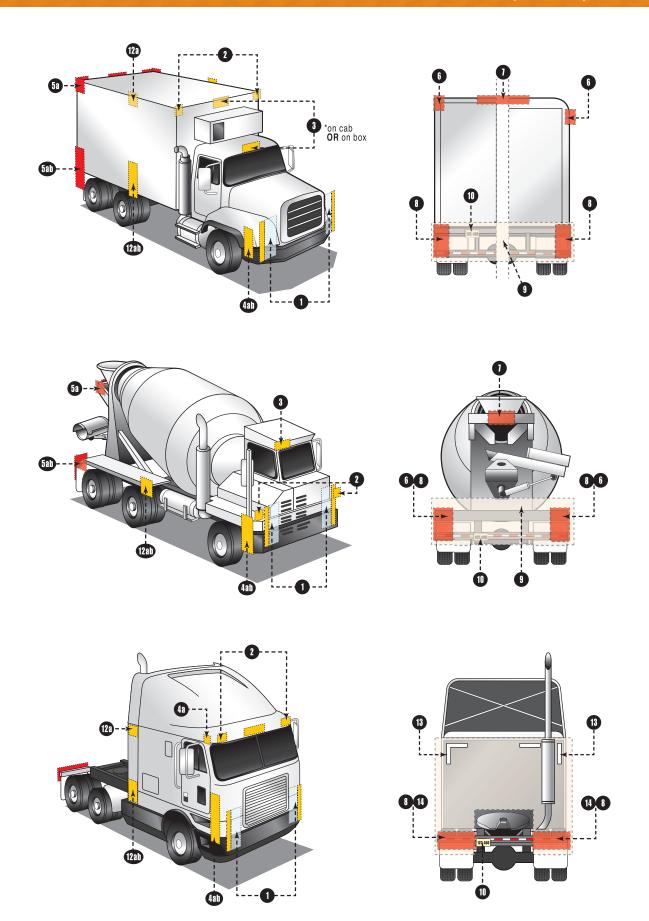

FMVSS LIGHTING REQUIREMENTS – TRUCKS/BUSES/MPV'S

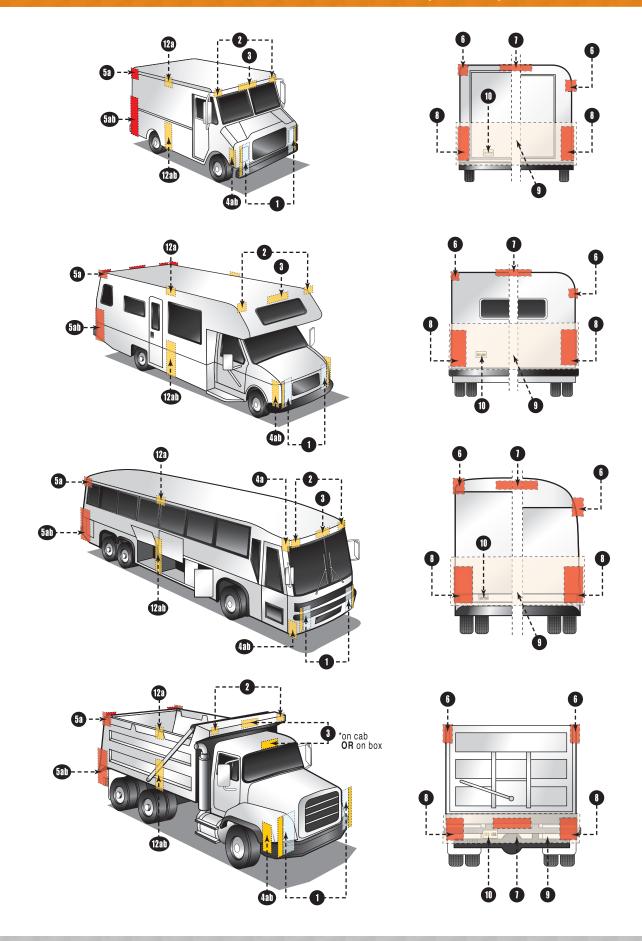

Truck & Trailer Regulation – FMVSS 108 (49CFR 571.108)

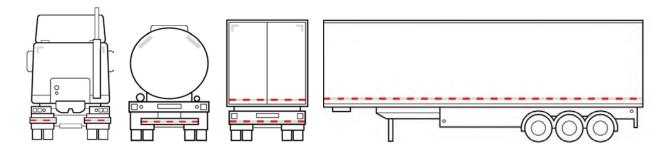



APPLICATION LOCATIONS:

Rear Upper Body

12" WHITE strips placed in the upper rear corners


Rear Lower Body


- 2" wide RED/WHITE tape placed on rear full width of vehicle
- 2" wide RED/WHITE tape minimum 24" length on fender, mudflap brackets or within 12" below the top of mudflaps

Side Marking

2" wide RED/WHITE tape placed on each side of trailer continuous or evenly spaced over 50% of the vehicle

School Bus Regulation - FMVSS 131 & 217



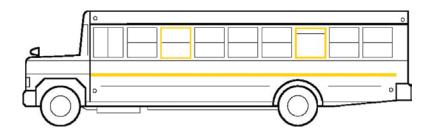



Each opening for a required emergency exit shall be outlined around its outside perimeter with a retroreflective tape with a minimum width of 1 inch and either red, white, or yellow in color, that when tested under the conditions specified in S6.1 of Standard No. 131 (49 CFR 571.131), meets the criteria specified.



APPLICATION LOCATIONS:

- 1" strips used to mark side emergency exit windows
- 1" strips used to mark back emergency exit windows



002121049 107	000102700	104	068WMTE	200	1020	210
00212104B 106 00212117B 341	00212378B 00212386B		068WMTEP		193G 193P	
00212127P 341	00212700B		09017101B		24004002B	
00212135P 106	00212701B		09017101P		240047171B	
00212137P 106	00212702B		105500SP		240047171LB	
00212155P 106	00212703B		105520B		240047171P	
00212157P 106	00212704P		105520BP		24004TR71	
00212207B 105	00212705P		11212207В		24004TR71P	
00212209В 105	00212706P		11212209B		240147171B	
00212213B 105	00212707P		11212235P		240147171LB	
00212217B341	00212708P		11212236P		240147171P	
00212227P 341	00212709P		11212237P		24014TR71	
00212233B 251	00212710P		11212238P		24014TR71P	
00212233P 251	00212711P		11212255P		24074B	
00212235P 105	00212712P		11212256P		24074P	
00212236P 105	00212717B		11212257P		2407764B	
00212237P 105	00212727P		11212258P		2407764P	
00212238P 105	01180071B		11212276B		2407765B	
00212239B251	01180071P		11212278B		2407765P	
00212239P 251	01180089B	321	11212307B	101	2407771C	
00212251B251	01180089P		11212309B	101	2407771CP	
00212251P251	01180090B		11212335P	101	2409171B	322
00212253B251	01180090BP	321	11212336P	101	2409171BP	322
00212253P251	014BCRCW	320	11212337P	101	24113160B	
00212255P 105	014BCRCWP	320	11212338P	101	24113160P	318
00212256P 105	03001175B	311	11212355P	101	2500128B	321
00212257P 105	03001175P	311	11212356P	101	2500128P	321
00212258P 105	04010040B	311	11212357P	101	2500171B	321
00212263P 105	04010040P	311	11212358P	101	2500171P	321
00212276B 105	04440013B	310	11212376B	101	2500189B	321
00212278B 105	04440013P	310	11212378B	101	2500189P	321
00212307B 104	04440016B	310	11212700B	103	30000000B	322
00212309B 104	04440016P	310	11212700BB	103	30031010B	322
00212316B 104	06001001B	316	11212700BBP	103	302B	322
00212317B 341	06001001P	316	11212701B	103	302P	322
00212327P 341	06001013B	314	11212702B	103	30655010B	322
00212331B250	06001013P	314	11212703B	103	3202B	322
00212331P250	06001014B	314	11212704P		3202P	322
00212333B250	06001014P	314	11212705P		357B	318
00212333P250	06001015B		11212706P	103	357P	318
00212335P 104	06001015P		11212707P		3801071BZL	
00212336P 104	06001022B		11212708P		3801071BZLP	
00212337P 104	06001022P		11212709P		3802071BZL	
00212338P 104	06001026B		11212710P		3802071BZLP	
00212342B250	06001026P		11212711P		500302B	
00212342P250	06001037B		13000018B		500302P	
00212345P 104	06001037P		13000018P		510001B	
00212346P 104	06001048B		1502B		510001P	
00212347P 104	06001048P		1502P		530002B	
00212351B250	06001061B		15202B		530002P	
00212351P 250	06001061P		15202P		69000201B	
00212355P 104	06001072B		16802B		69000201P	
00212356P 104	06001072B		16802LB		69000300B	
00212357P 104	060102B		16802P		69000300P	
00212358P 104	060102B		18543910B		725022B	
00212362B 250	060102F		18543916B		725022B	
00212362P 250	0601P		18543916BP		726022B	
00212365P 104	06300004B		19102B		726022B	
00212367P 104	06300004B 06300004P		19102P		7850NFRC	
00212368P 104	068NME		193BSP		7850NFRCP	
00212376B 104	068NMEP		193BSPP		825LED	
00Z1Z3/0D1U4	JOOINIVIEF	307	וטטטו F	317	02JLLD	313

825TR02313	A11DBP329	A20WBP 354	A36RB347
825TR02P313	A11G1B329	A211CB1336	A36RBP
826L313	A11G1BP329	A211NCCB 336	A36WRB354
826LED 313	A11GB329	A211RXB 336	A36WRBP354
826LEDP 313	A11GBP329	A21AB262	A37RB347
826LP313	A11GLPB329	A21CHB 343	A37RBP 347
826TR02313	A11GLPBP329	A21CHBP 343	A38AB347
826TR02P313	A11GSDB329	A21RB262	A38ABP347
826TR12313	A11PB329	A21RBP 262	A38RB347
826TR12P313	A11PBP329	A24RB347	A38RBP 347
826TR90313	A11RB347	A24RBP347	A39RB347
A0028AB347	A11RBP	A255WH354	A39RBP
A0028CRB342	A11RXB 324	A25GB	A3TRSSB 330
A0028RB347	A11RXBP 324	A25GBP	A3TRSSBP 330
A0026RB	A11SRB345	A25R10WB354	
			A400355
A0114AWGBLKWHTB 356	A11SRBP345	A25R10WBP354	A40RB
A0116AWGBLWSB 356	A11SSB329	A25TRSSB 332	A40RBP 347
A0118AWGBLSB 356	A11SSBP329	A25TRSSBP 332	A40SRB345
A0118AWGBR5KSB 356	A12B2LPB329	A25W42B 354	A40SRBP345
A0118AWGBRGR5KSB 356	A12B2LPBP329	A25W42BP 354	A40W42B 354
A0118AWGBRGRSB 356	A12GB329	A25W5B 354	A40W42BP354
A0118AWGBRRE5KSB 356	A12GBP329	A25W5BP 354	A40W5B 354
A0118AWGBRSB 356	A12GLPB329	A25WB 354	A40W5BP 354
A0118AWGBRYLGRB 356	A12GLPBP329	A25WBP354	A41CB347
A0118AWGBRYLWSB 356	A12PB351	A25WH354	A41CBB343
A0118AWGGRESB 356	A12PBP351	A2CBGB	A41CBP
A0118AWGGRSB 356	A13B210B342	A2RB347	A41CRB
A0118AWGRESB	A13B2B	A2RBP 347	A42AB 347
A0118AWGWHT5KSB 356	A13B2BP342	A30W10B 354	A42ABP347
A0118AWGWHTSB 356	A13C210B342	A30W10BP354	A42GB
A0118AWGYESB 356	A13C210BP342	A30W5B 354	A42GBP346
A06TR 342	A13C2B342	A30W5BLB354	A42PMB 350
A06TRP342	A13C2BP342	A30W5BP 354	A42PMBP 350
A09BB342	A13G2B346	A30WB 354	A42RB347
A09BBP342	A13G2BP346	A30WBP 354	A42RBP 347
A09CB342	A13NCC2B 342	A31AB347	A43FMBB346
A09CBP342	A13NCC2BP342	A31ABP347	A43RB347
A09WB 342	A14GB329	A31RB347	A43RBP 347
A09WBP342	A14GBP329	A31RBP 347	A44A500B347
A101TRSSB 334	A15CB342	A32AB 347	A44AB347
A101TRSSBP 334	A15CBP342	A32ABP347	A44ABP347
A10BB329	A15CGB 342	A32GB346	A44GTB346
A10BBP329	A15GB346	A32GBP346	A44GTBP346
A10GB329	A15GBP346	A32RB347	A44R500B347
A10GBP329	A16R348	A32RBP 347	A44RB
A10R1B347	A16RB347	A33GB	A44RBP
A10TH5B353	A16RBP	A33GBP345	A45BB
A10TH5BP353	A178TRSSB	A35AEB 347	A45BBP
A111TRSSB	A178TRSSBP 336	A35AEBP	A45CB350
A111TRSSBP	A17CB343	A35R10WB354	A45CBP350
A1157B	A17GB	A35R10WBP354	A45CGB
A1157BP355	A17GBP346	A35RB347	A45CGBP
A11AB347	A17RB347	A35W42B 354	A45GB 333
A11ABP347	A17RBP347	A35W42BP354	A45GBP333
A11AXB324	A185TC 353	A35W5B354	A45PB352
A11AXBP324	A18TC 353	A35W5BP 354	A45PBP352
A11BLPB329	A194B355	A35WB 354	A45PMB 352
A11BLPBP329	A194BP355	A35WBP 354	A45PMBP 352
A11CRB329	A19CB343	A36AB347	A45PS352
A11CRBP329	A20R348	A36ABP347	A45SB333
A11DB329	A20WB 354	A36R348	A45SBP
		3-10	

A46GB	333	A60GB	335	A70GBDP	335	A91GZB	337
A46GBP		A60GBP		A70GBP		A91GZBP	
A46P135B		A60RB		A71C1BAWN		A91LRW	
A46P36B		A60RBP		A71CBAWN		A91LRWP	
A46P75B		A61EZPG		A71CBAWNP		A91LW	
A46PB		A64BB		A71CCBWAN		A91LWP	
A46PBB		A64BBP		A73GB		A91OB	
A46PBBP		A64CRB		A73GBP		A91OBP	
A46PBP		A65B		A75TB		A91RB	
A46PPG		A65BP		A75TBP		A91RBP	
A46PPGP		A65P		A75TC		A93PB	
A46PS		A65PB		A75TC6		A93PBP	
A47PB		A65PBP				A94VB	
A47PBB		A65PBPG		A76GB		A94VBP	
A47PBBP		A65PBPGP		A77\$1B A77\$1BP			
						A9R	
A47PBP		A65PRXB		A78CB1		A9RB	
A47PS		A65PRXBP		A78CB1P		A9RBP	
A48CB		A65PS		A78NCCB		ACP5B	
A48CBP		A65TB		A78NCCBB		ACP5BP	
A48TC		A65TBP		A78RXB		ACP5S	
A49PB		A66AB		A78RXBP		ACP7B	
A49PBB		A66ABP		A79CB		ACP7BP	
A49PBBP		A66GB		A79CBP		ACP7S	
A49PBP		A66GBP		A7TRSSB		ADH55B	
A4TC4WB		A66PB		A7TRSSBP		AIL21B	
A4TC4WBP		A66PBP		A7W6FTB		AIL21BP	
A52AB		A66RB		A7W8FTB		AL145PWTB	
A52ABP		A66RBP		A7WCB		AL145PWTBP	
A52GB		A67BB	338	A7WCBP		AL16RB	
A52GBP		A67BBP	338	A80GB	335	AL16RBP	347
A52RB	347	A67CB	338	A830B	350	AL17RB	347
A52RBP		A67CBP	338	A839B	350	AL17RBP	
A53GB	330	A67CBPG	338	A86PB		AL421PG	
A53GBP		A67CBPGP		A86PBP	351	AL42PB	351
A54GB	330	A67P10G	338	A8R	348	AL42PBP	351
A54GBP	330	A67P10GP	338	A8RB	347	AL42PG	351
A54GK	330	A68AB	348	A8RBP	347	AL42PGP	351
A54GKP	330	A68ABP	348	A8RK	348	AL45PWTB	352
A55CB	330	A68P	349	A90AB	348	AL45PWTBP	352
A55CBP	330	A68P1B	338	A90ABP	348	AL82AB	131
A55GB	331	A68PB	338	A90CB	337	AL82ABP	131
A55GBP	331	A68PBP	338	A90GB	346	AL82RB	131
A55GK		A68RB		A90P1B	355	AL82RBP	131
A55GKP	331	A68RBP		A90PB		AL90AB	
A56GB		A68SSB	343	A90RB		AL90ABP	132
A56GBP		A68SSBP		A90RBP		AL90AK	
A57CB		A69CB		A91AB		AL90AS	132
A57CBP		A69CBP		A91ABP		AL90RB	
A57CCB		A69GB		A91BB		AL90RBP	
A57CCBP		A69GBP		A91BBP		AL90RCB	
A57GB		A69NCCB		A91BOB		AL90RCBP	
A57GBP		A69RXCB		A91BOBP		AL90RK	
A57GK		A69RXCBP		A91BS		AL90RS	
A57GKP		A6TC4WB		A91CB		AL91A1224B	
A57WB		A6TC4WBP		A91CBP		AL91A1224B	
						AL91AB	
A57WBP		A6TC5B		A91G15B1			
A57WH		A700		A91G15B1P A91GB		AL91CAB AL91CABP	
A58GB			411	4911-K	44/	ALVII AKP	1 3 1
		A70ECBB					
A58GBP	331	A70ECCRB	344	A91GBP	337	AL91RB	131
	331 334		344 335		337 337		131

AL9RBP	348	BU33CRXLB 249	BUL12CB1FPG 86	BUL90CB 88
ALEDFB		BU33CRXLBP249	BUL12CB1FPGP 86	BUL90CBP 88
ALEDFBP		BU41CB248	BUL12CBP 86	CB11AB273
ALEDFS		BU41CBP248	BUL12CFB86	CB11AS273
ALEDRST1B		BU44CB249	BUL12CFBP 86	CB11AS6273
ALEDRST1BP		BU44CBP249	BUL12CKB 86	CB11WAB 273
ALEDRST2B		BU45CB 249	BUL12CKBP86	CB11WABP273
ALEDRST2BP		BU45CBP249	BUL12CSB	CB15AK273
APL1AB		BU49CB249	BUL12CSBP 86	CB20AB274
APL1ABP		BU49CBP249	BUL13CB 179	CB20ABP274
APL1CB		BU64CB 249	BUL13CBP 179	CB20AS
APL1CBP		BU64CBP249	BUL22CB 85	CB22AB274
APL5AB		BU70CB 249	BUL22CBP 85	CB22ABP274
APL5ABP		BU70CBP249	BUL23C24B 82	CB22AS 274
APL5CB		BU74CB 249	BUL23C24BP 82	CB22RB
APL5CBP		BU74CBP249	BUL23CB 82	CB22RBP 274
APLL11AB		BUL002CB 87	BUL23CBP 82	CBL22AB 160
APLL11CB		BUL002CBP 87	BUL24CB 88	CBL22ABP160
ARVIL35B		BUL002CM3B 87	BUL24CBP 88	CBL22AS 160
ARVIL35BP		BUL002CM3BP87	BUL28CLPB181	CBL22CAB 160
AST60B			BUL28CLPBP 181	CBL22CAB 160
		BUL003C1224B 81		
AST60BP		BUL003C1224BP 81	BUL35CB 88	CBL22RB
AST61B		BUL003CB 81	BUL35CBP 88	CBL22RBP 160
AST61BP		BUL003CBP 81	BUL43CB 179	DH55
BA44FNL		BUL003CKB 81	BUL43CBK 179	DH55P
BA44FNLP		BUL003CKBP 81	BUL43CBKP 179	DL16CC 293
BA44FNR		BUL06C1224B 80		DL16WC293
BA44FNRP		BUL06C1224BP 80		DL55CS 293
BA65ARLB		BUL06CB 80		DLL50CB 222
BA65ARLBP		BUL06CBP 80		DLL50CBP 222
BA65ARRB		BUL06CFB80		DLL50CC222
BA65ARRBP		BUL06CFBP80		FTL42A1224B14
BK20BB		BUL06CFMB 80		FTL42A1224BP14
BK20BBP		BUL06CFMBP80	BUL602CRB 83	FTL53ALCPG14
BK21BB		BUL06CK1MB80	BUL602CRBP 83	FTL53ALCPGP14
BK31BB		BUL06CK1MBP80		HLL70HLB2
BK31BBP		BUL06CKB 80	BUL603CBP 77	HLL70HLBP2
BK42CB		BUL06CKBP 80		HLL70HLS2
BK42CBP		BUL06CMB 80		HLL78LB4
BK45BB	333	BUL06CMBP80		HLL78LBP4
BK45BBP	333	BUL101CB 78	BUL69CBMCV2B180	HLL78LS 4
BK53BB	330	BUL101CBP 78	BUL69CBMCV2BP 180	HLL79HB 4
BK53BBP	330	BUL101CKB 78	BUL69CBP 180	HLL79HBP4
BK5557GB	330	BUL101CKBP78	BUL69CPG 180	HLL79HS 4
BK5557GBP	330	BUL10CB 85	BUL69CPGP 180	HLL88LB5
BK55BB	332	BUL10CBP 85	BUL72CB 180	HLL88LBP5
BK55BBP	332	BUL111CB 84	BUL72CBGK 180	HLL89HB5
BK57BB	332	BUL111CBP 84	BUL72CBGKP180	HLL89HBP5
BK57BBP	332	BUL11CB 79	BUL72CBP 180	HLL90HLB5
BK66D1B	344	BUL11CBP 79	BUL73CB181	HLL90HLBP5
BK66D1BP		BUL11CBX 79	BUL73CBP181	HLL93HLB3
BK66DB		BUL11CBXP79	BUL74CBK180	HLL93HLBP3
BK66DBP		BUL11CKB 79	BUL74CBKP 180	HLL93HLS3
BK70B		BUL11CKBP79	BUL78C3MB181	IL21CB289
BK70BB		BUL11CM24B79	BUL78C3MBP181	IL21CBP289
BK70BBP		BUL11CM24BP79	BUL78CB 181	IL21CPG289
BU11CS		BUL11CMB79	BUL78CBP 181	IL21CS 289
BU33CB		BUL11CMBP79	BUL78CEZB181	IL21CS6
BU33CBP		BUL12C1224B 86	BUL78CEZBP 181	IL31CS
BU33CRX24LB		BUL12C1224BP 86	BUL90C24B 88	IL61CB290
BU33CRX24LBP		BUL12CB 86	BUL90C24BP 88	IL61CBP290
2000CI(\\Z\file\)	47/	552126500	551750275100	1201001270



IL91CB290	ILL45CB	LP20SB340	LPL12CB171
IL91CBP290	ILL45CBP	LP20SBP340	LPL12CBP171
ILL01RB 182	ILL46CB	LP21CB278	LPL12CKF2B 171
ILL01RBP182	ILL46CBP 192	LP21CBP278	LPL12CKF2BP171
ILL06COB 182	ILL48CB 192	LP21CS278	LPL12CKM2B171
ILL06COBP 182	ILL70ABBAWN194	LP21CS6278	LPL12CKM2BP 171
ILL07COB 182	ILL70ABBAWNP194	LP25SB339	LPL12CKMB171
ILL07COBP 182	ILL70C24B 193	LP25SBP339	LPL12CKMBP 171
ILL08COB 183	ILL70C24BP 193	LP25SGGB 339	LPL12CPGB171
ILL08COBP183	ILL70CB 193	LP26SKB285	LPL12CPGBP171
ILL08COPG183	ILL70CBAWN 194	LP26SKBP285	LPL21CB172
ILL08COPGP183	ILL70CBAWNFS194	LP31CB279	LPL21CBP172
ILL10CCB 183	ILL70CBAWNP 194	LP31CBP279	LPL26SKB178
ILL10CCBP 183	ILL70CBBAWN 194	LP31CPG279	LPL26SKBP178
ILL11CCB 184	ILL70CBBAWNP 194	LP31CPGP279	LPL31C1PG172
ILL11CCBP 184	ILL70CBP 193	LP31CS279	LPL31CB172
ILL124CPG 186	ILL70CBSBAWN 194	LP31SB340	LPL31CBP172
ILL124CPGP 186	ILL70CBSBAWNP 194	LP31SBP340	LPL31CEZB 172
ILL21CB 185	ILL70CCSBAWN194	LP35BB340	LPL31CEZBP 172
ILL21CBP 185	ILL70CCSBAWNP 194	LP35BBP 340	LPL31CPG172
ILL21CTPB 185	ILL70CSB 193	LP41CB280	LPL31CPGP172
ILL22C1224B 185	ILL70CSBP 193	LP41CBP280	LPL31CS 172
ILL22C1224BP 185	ILL71C1BAWN 194	LP41CS280	LPL31CSB 172
ILL22CB 185	ILL71CB 193	LP41CS6280	LPL31CSBP172
ILL22CBB 185	ILL71CBAWN 194	LP51CB280	LPL41CB173
ILL22CBBP185	ILL71CBAWNFS 194	LP51CBP280	LPL41CBP173
ILL22CBP 185	ILL71CBAWNP 194	LP52CB281	LPL42CBF173
ILL22CFS	ILL71CBP193	LP52CBP281	LPL42CBFP 173
ILL22CHB185	ILL71CPG193	LP52HP350	LPL43CB173
ILL22CHBP185	ILL71CPGP193	LP52HPP350	LPL43CBP173
ILL24CB 186	ILL71CSB193	LP54CB	LPL43CGBF
ILL24CBP 186	ILL71CSBP 193	LP54CBP281	LPL43CGBFP173
ILL24CPG 186	ILL72CB 193	LP55CB281	LPL55CB173
ILL28CMB 183	ILL72CBP 193	LP55CBP281	LPL55CBP173
ILL28CMBP183	ILL85CB	LP56CB	LPL55CKB173
ILL28CMPG 183	ILL85CBP	LP56CBP282	LPL55CKBP173
ILL28CMPGP 183	ILL86BCB 195	LP5SB340	LPL55CPG173
ILL29CB 187	ILL86BCBP 195	LP5SBP	LPL55CPGP173
ILL29CB 187	ILL86CB 195	LP65CB	
		LP65CBP	LPL56CB
ILL29CFB	ILL86CBP		LPL56CBP173
ILL29CFBP 187	ILL87CB	LP65CS282	LPL57CB
ILL30CBB	ILL87CBP	LP71CB283	LPL57CBP174
ILL30CBBP188	ILL91CB	LP71CBP283	LPL57CKB174
ILL31CB	ILL91CBP 196	LP71CS283	LPL57CKBP174
ILL31CBP 188	ILL91CPG 196	LP81BB283	LPL58CB 175
ILL32CB	ILL91CPGP196	LP81BBP 283	LPL58CBP175
ILL32CBP	LM315BB	LP81BPG 283	LPL59CB
ILL32CPG 188	LM315BBP 197	LP81BPGP 283	LPL59CBP175
ILL33CB 189	LM835CB197	LP81GB	LPL61C24B
ILL33CBP 189	LM835CBP 197	LP91CB285	LPL61C24BP176
ILL35CB 188	LP10S340	LP91CBP285	LPL61C24PG 176
ILL35CBP 188	LP10SB340	LP91CS285	LPL65CB 176
ILL36CB 189	LP10SBP340	LP95CBF 284	LPL65CBB176
ILL36CBP 189	LP11CB278	LP97CB284	LPL65CBBP176
ILL36CPG 189	LP11CBP278	LP97CBP 284	LPL65CBP176
ILL36CPGP189	LP11CPG 278	LPB31CPG 279	LPL81CB177
ILL38CMB190	LP11CPGP 278	LPB31CPGP279	LPL81CBP177
ILL38CMBP190	LP11CS278	LPL11CB170	LPL82CB177
ILL39CB191	LP15S340	LPL11CBP170	LPL82CBB177
ILL39CBP 191	LP15SB340	LPL11CPG170	LPL91CAB 178
ILL39RCB191	LP15SBP340	LPL11CPGP170	LPL91CABP 178

170	11007100	1105/15	1,000,100
LPL91CB	MC37ABP 265	MC56AB256	MC82ABP 271
LPL91CBP178	MC38AB265	MC56ABP 256	MC82RB271
LPL91CKALPB 178	MC38ABP 265	MC56RB256	MC82RBP271
LPL91CKALPBP 178	MC38RB265	MC56RBP256	MC90AS260
LPL91CPG178	MC38RBP265	MC57AB255	MC90RS 260
LPL91CPGP178	MC42AB 266	MC57ABP 255	MC91AB260
LPL91CS 178	MC42ABP 266	MC57AS255	MC91ABP 260
LPLB31CPG172	MC42AS 266	MC57RB255	MC91AS260
MC11AB261	MC42RB266	MC57RBP255	MC91RS 260
MC11ABP 261	MC42RBP266	MC57RS 255	MC92AB260
MC11AK 261	MC42RS 266	MC58AS268	MC92ABP260
MC11AS261	MC441WB267	MC58RS 268	MC92AS260
MC11RB261	MC442WB267	MC61ABKB 257	MC92RB
MC11RBP261	MC44AB267	MC61ABKBP257	MC92RBP260
MC11RS 261	MC44AB1267	MC65AB259	MC92RS 260
MC21AS262	MC44AB1P	MC65ABP259	MC93AB275
MC21RS 262	MC44ABP 267	MC65ARB258	MC93ABP 275
MC22AB 262	MC44AS267	MC65ARBP 258	MC93R2PG275
MC22ABP 262	MC44RB267	MC65AS259	MC93R2PGP275
MC22RB262	MC44RB1 267	MC65RB259	MC93RB275
MC22RBP262	MC44RB1P267	MC65RBP259	MC93RBP275
MC25AB252	MC44RBP267	MC65RS259	MC93RK275
MC25ABP 252	MC44RS 267	MC66AB 268	MC93RPG275
MC27AB252	MC48AB266	MC66ABP 268	MC93RPGP275
MC27ABP 252	MC48ABP 266	MC66AS268	MC94RB276
MC30AB261	MC48APG 266	MC66HAB268	MC94RBP276
MC30ABP 261	MC48APGP 266	MC66HABP268	MC95AB272
MC31A15B2263	MC48RB	MC66RB	MC95ABP 272
MC31AB	MC48RBP266	MC66RBP268	MC95APG 272
MC31ABP 263	MC48RPG266	MC66RS 268	MC95AS272
MC31AS263	MC48RPGP266	MC67AB259	MC95RB272
		MC67ABP 259	
MC31R15B2263	MC505ABSB254		MC95RBP272
MC31RB263	MC505ABSBP254	MC67AK 259	MC95RS 272
MC31RBP263	MC52AB253	MC67ARB258	MC97R70PG276
MC31RS 263	MC52ABP 253	MC67ARBP258	MC97RB276
MC32AB263	MC52AXB 253	MC67RB259	MC97RBP276
MC32ABB 263	MC52AXBP 253	MC67RBP259	MC97RK276
MC32ABBP 263	MC52RB253	MC67RK259	MC99AB277
MC32ABP 263	MC52RBP253	MC68AB269	MC99ABP277
MC32ABS 263	MC52RXB253	MC68ABP 269	MC99AK 277
MC32AS263	MC52RXBP253	MC68AS269	MC99RB277
MC32RB263	MC53AB254	MC68RB269	MC99RBP277
MC32RBB263	MC53ABP 254	MC68RBP269	MC99RK277
MC32RBBP263	MC53ABSB254	MC68RS 269	MCL002AXB130
MC32RBP263	MC53ABSBP254	MC70AB269	MCL002RXB 130
MC32RBS 263	MC53AKB 254	MC70ABP 269	MCL0030ABB144
MC32RS 263	MC53AKBP 254	MC70AS269	MCL0030RBB 144
MC35AB264	MC53AS254	MC70RB269	MCL0030RBB148
MC35ABP 264	MC53RB254		
	MC53RBP254	MC70RBP269 MC70RS269	MCL0032ABBP148
MC35AEB			MCL0032ABS148
MC35AEBP	MC53RKB254	MC71AS270	MCL0032RBB 148
MC35AS264	MC53RKBP254	MC71RS 270	MCL0032RBBP148
MC36AB264	MC53RS 254	MC76AB270	MCL0032RBS148
MC36ABP 264	MC54AB254	MC76ABP270	MCL0039ABB145
MC36AS264	MC54ABP 254	MC77RB275	MCL0039ABBP145
MC36AS6264	MC54RB254	MC77RBP275	MCL0039RBB 145
MC36RB264	MC54RBP254	MC81AB271	MCL0039RBBP145
MC36RBP264	MC55AB255	MC81ABP271	MCL10AB112
MC36RS 264	MC55ABP255	MC81RB271	MCL10ABP112
MC36RS6 264	MC55RB255	MC81RBP271	MCL10ACK12JPG 112
MC37AB265	MC55RBP255	MC82AB271	MCL10ACK3L12B 163
200			

MCL10ACKA12B112	MCL111AKPGP110	MCL11RPGP114	MCL13CA2B139
MCL10ACKA12PG 112	MCL111RB 110	MCL11SAB108	MCL13CA2BP139
MCL10ACKB112	MCL111RBP 110	MCL11SABP108	MCL13CA3B139
MCL10ACKPG 112	MCL111RKB 110	MCL11SACKB108	MCL13CA3BP139
MCL10ACKPGP 112	MCL111RKBP110	MCL11SACKBP108	MCL13CR2B 139
MCL10AK1224B 112	MCL111RKPG110	MCL11SAK1B108	MCL13CR2BP 139
MCL10AK1224BP112	MCL111RKPGP110	MCL11SAK1BP108	MCL13R21PG 139
MCL10AK12JPG112	MCL112AKB111	MCL11SAKB108	MCL13R2B139
MCL10AK1FPG112	MCL112AKBP111	MCL11SAKBP 108	MCL13R2BP139
MCL10AKA10PG112	MCL112RB111	MCL11SRB108	MCL13R2MB
MCL10AKA12B112	MCL112RBP111	MCL11SRBP 108	MCL13R2MBP139
MCL10AKB112	MCL112RKB111	MCL11SRCKB 108	MCL13RS
MCL10AKBP112	MCL112RKBP111	MCL11SRCKBP 108	MCL13RTRS139
MCL10AKL12B112	MCL11A24KB114	MCL11SRK1B 108	MCL14A12GB140
MCL10AKL12PG112	MCL11AB114	MCL11SRK1BP 108	MCL14A12GBP140
MCL10AKL12PGN 112	MCL11ABP114	MCL11SRKB 108	MCL14AB140
MCL10AKL18JPG 112	MCL11AHPG114	MCL11SRKBP 108	MCL14ABF140
MCL10CAK14B112	MCL11AHPGP114	MCL121AK9PVG110	MCL14ABFP140
MCL10CAK14BP112	MCL11AK12B114	MCL121AK9PVGP 110	MCL14ABP140
MCL10CRK14B 113	MCL11AK12PG114	MCL121RK9PVG110	MCL14AGB140
MCL10CRK14BP113	MCL11AKAB114	MCL121RK9PVGP 110	MCL14AGBP140
MCL10RB 113	MCL11AKABP114	MCL12AB115	MCL14AGPB140
MCL10RBP 113	MCL11AKB114	MCL12ABP115	MCL14AGPBP 140
MCL10RCK12JPG 113	MCL11AKBF114	MCL12AK115	MCL14CABF140
MCL10RCK3L12B 163	MCL11AKBFP114	MCL12AKB115	MCL14CABFP 140
	MCL11AKBP114		
MCL10RCKA12B113		MCL12AKBP115	MCL14CAGB140
MCL10RCKA12PG 113	MCL11AKPRB 114	MCL12AKPG115	MCL14CRBF140
MCL10RCKB 113	MCL11AKPVG114	MCL12ARLB116	MCL14CRBFP140
MCL10RCKPG 113	MCL11AKPVGP114	MCL12ARLBP116	MCL14CRGB 140
MCL10RCKPGP113	MCL11APG114	MCL12ARRB 116	MCL14R2B 140
MCL10RK1224B 113	MCL11APGP114	MCL12ARRBP 116	MCL14R2BP 140
MCL10RK1224BP113	MCL11CAB114	MCL12CA2RLB 116	MCL14RB140
MCL10RK12JPG 113	MCL11CABP114	MCL12CA2RRB116	MCL14RBF140
MCL10RK1FPG113	MCL11CAKB114	MCL12RB115	MCL14RBFP140
MCL10RKA10PG113	MCL11CAKBF114	MCL12RBP115	MCL14RBP140
MCL10RKA12B113	MCL11CAKBP114	MCL12RK 115	MCL14RGB140
MCL10RKB113	MCL11CAKPG114	MCL12RK3B 164	MCL14RGBP140
MCL10RKBP113	MCL11CAKPGP 114	MCL12RK3BP164	MCL14RPG140
MCL10RKDTPG113	MCL11CRB114	MCL12RK3RMB 164	MCL14RPGP140
MCL10RKDTPGP113	MCL11CRBP 114	MCL12RKB115	MCL155AB118
MCL10RKL12B113	MCL11CRKB 114	MCL12RKBP 115	MCL155ABP118
MCL10RKL12PG	MCL11CRKBF114	MCL12RKPG115	MCL155RB 118
MCL10RKL12PGN 113	MCL11CRKBP114	MCL131A210B139	MCL155RBP 118
MCL10RKL18JPG113	MCL11CRKPG114	MCL131A2B139	MCL157AB125
MCL110AB109	MCL11CRKPGP114	MCL131A2BP139	MCL157ABP125
MCL110ABP109	MCL11R24KB 114	MCL131AC210B139	MCL157RB 125
MCL110AKB109	MCL11RB 114	MCL131CA3B139	MCL157RBP 125
MCL110AKBF109	MCL11RBP 114	MCL131CR3B139	MCL15AKPG141
MCL110AKBFP109	MCL11RHPG114	MCL131R210B 139	MCL15AKPGP 141
MCL110AKBP109	MCL11RHPGP114	MCL131R2B 139	MCL15APG141
MCL110RB109	MCL11RK12B114	MCL131R2BP 139	MCL15APGP141
MCL110RBP109	MCL11RK12PG114	MCL131RC210B 139	MCL15RKPG141
MCL110RKB109	MCL11RKAB114	MCL13A21PG 139	MCL15RKPGP141
MCL110RKBF109	MCL11RKB114	MCL13A2B139	MCL15RPG141
MCL110RKBFP 109	MCL11RKBF 114	MCL13A2BP	MCL15RPGP141
MCL110RKBP 109	MCL11RKBFP 114	MCL13A2MB139	MCL165AB133
		MCL13A2MBP 139	MCL165ABP133
MCL111AB110	MCL11RKBP114		
MCL111ABP110	MCL11RKPV4G114	MCL13APG139	MCL165RB
MCL111AKB110	MCL11RKPVG114	MCL13APGP139	MCL165RBP 133
MCL111AKBP110	MCL11RKPVGP114	MCL13AS 139	MCL17AB143
MCL111AKPG110	MCL11RPG114	MCL13ATRS 139	MCL17ABB143

MCI 17ADD 142	MCI 20DS 1.47	AACU 507 AAAD 107	10/
MCL17ABP143	MCL32RS147	MCL527AMB127	MCL57ACB126
MCL17CAB143	MCL35A32G149	MCL527AS 127	MCL57ACBP126
MCL17CABP143	MCL35A32GP149	MCL527RB 127	MCL57AK126
MCL17CRB 143	MCL35AEB149	MCL527RBP 127	MCL57R1224B 126
MCL17CRBP 143	MCL35AEBP149	MCL527RFB 127	MCL57R1224BP 126
MCL17RB 143	MCL36AB150	MCL527RFBP 127	MCL57RB 126
MCL17RBB 143	MCL36ABP150	MCL527RK 127	MCL57RBP 126
MCL17RBP 143	MCL36AS 150	MCL527RK6 127	MCL57RCB 126
MCL180ARB161	MCL36AS6 150	MCL527RMB 127	MCL57RCBP 126
MCL180ARBP161	MCL36RB 150	MCL527RS127	MCL57RK 126
MCL180ARFK161	MCL36RBP 150	MCL52AB124	MCL57RKB 126
MCL181ARCRB 162	MCL40AB151	MCL52ABP124	MCL57RKBP 126
MCL181ARCRGB 162	MCL40ABP151	MCL52AHXB 122	MCL58AB128
MCL181ARCRL12B 162	MCL40APB151	MCL52AHXBP122	MCL58ABP128
MCL19AB143	MCL40APBP151	MCL52AMB124	MCL58ACB128
MCL19ABP143	MCL40AS 151	MCL52AMBP 124	MCL58ACBP128
MCL19CAB143	MCL40RB 151	MCL52RB 124	MCL58AMFB128
MCL19CABP143	MCL40RBP 151	MCL52RBP 124	MCL58AMFBP128
MCL19CRB143	MCL40RS151	MCL52RMB124	MCL58APMB 128
MCL19CRBP143	MCL44AB151	MCL52RMBP124	MCL58RB 128
MCL19RB143	MCL44AB1151	MCL54AB124	MCL58RBP 128
MCL19RBP143	MCL44AB1P151	MCL54ABP124	MCL58RMFB 128
MCL21AB117	MCL44ABP151	MCL54RB 124	MCL58RMFBP 128
MCL21ABP117	MCL44RB 151	MCL54RBP124	MCL58RPMB128
MCL21AKRGVB114	MCL44RB1151	MCL55A1224B119	MCL59A1224B129
MCL21AKRYVB114	MCL44RB1P151	MCL55A1224BP119	MCL59A1224BP129
MCL21RB 117	MCL44RBP151	MCL55AB119	MCL59AB129
MCL21RBP 117	MCL45AB152	MCL55ABP119	MCL59ABP129
MCL21RKPV4G 114	MCL45ABP152	MCL55ACB119	MCL59R1224B 129
MCL21RKPVG 114	MCL45AS 152	MCL55ACBP119	MCL59R1224BP 129
MCL22RK3B 164	MCL45RB 152	MCL55AK119	MCL59RB 129
MCL22RK4B 164	MCL45RBP 152	MCL55FRB119	MCL59RBP 129
MCL22RK5B 164	MCL45RS152	MCL55FRBP 119	MCL61AB135
MCL23AB117	MCL46AB152	MCL55R1224B 119	MCL61ABP135
MCL23ABP117	MCL46ABP152	MCL55R1224BP119	MCL61AK135
MCL23RB 117	MCL46RB 152	MCL55RB 119	MCL61AR26BK
MCL23RBP 117	MCL46RBP 152	MCL55RBP 119	MCL61AR26BKP 137
MCL290APG 142	MCL48AB154	MCL55RCB 119	MCL61ARB
MCL290RPG 142	MCL48ABP154	MCL55RCBP 119	MCL61ARBP
MCL299AB142	MCL48AKB154	MCL55RK 119	MCL61AS 135
MCL299ABP142	MCL48AKBP 154		
MCL299RB 142	MCL48CAB154	MCL56AB121 MCL56ABP121	MCL61RB 135 MCL61RBP 135
MCL299RBP 142	MCL48CABP154	MCL56AFB 121	MCL61RK 135
MCL31AB142	MCL49AB153	MCL56AFBP121	MCL61RS135
MCL31ABP146			
	MCL49ABP153	MCL56AFMB121	MCL63AB
MCL31RB146	MCL49RB	MCL56AK121	MCL63ABP136
MCL31RBP146	MCL49RBP 153	MCL56AK6121	MCL63CAB
MCL31RPG 146	MCL505ABSB	MCL56AS 121	MCL63CABP
MCL32AB147	MCL505ABSBP120	MCL56RB 121	MCL63CRB 136
MCL32ABB147	MCL505GABSB120	MCL56RBP121	MCL63CRBP 136
MCL32ABBP147	MCL505GABSBP 120	MCL56RFB121	MCL63RB 136
MCL32ABP147	MCL50AB	MCL56RFBP 121	MCL63RBP 136
MCL32ABS 147	MCL50ABP123	MCL56RFMB 121	MCL65A24B134
MCL32AS 147	MCL50RB 123	MCL56RK 121	MCL65A24BP
MCL32ATB 147	MCL50RBP 123	MCL56RK6 121	MCL65AB134
MCL32ATBP 147	MCL527AB127	MCL56RMB 121	MCL65ABP134
MCL32RB 147	MCL527ABP127	MCL56RS 121	MCL65AKB134
MCL32RBB 147	MCL527AFB 127	MCL57A24B126	MCL65ARB137
MCL32RBBP 147	MCL527AFBP 127	MCL57A24BP126	MCL65ARBP137
MCL32RBP 147	MCL527AK127	MCL57AB126	MCL65CAB134
MCL32RBS147	MCL527AK6127	MCL57ABP126	MCL65CABP134

1401.450.455	14017000	1/5	550150
MCL65CARB	MCL78RB 166	MCL98RBTKPG 165	RE31RS 324
MCL65CARBP	MCL78RBP 166 MCL81AB	MCL98RK 165 MCL98RL601B 165	RE35AB
MCL65CRB			
MCL65CRBP 134	MCL81ABP158	MCL98RL60B	RE35RB 324 RE35RBP 324
MCL65R24B	MCL81RB	MCL99AB	
MCL65R24BP 134	MCL81RBP 158	MCL99ABP138	RE37ABB
MCL65RB 134	MCL82AB	MCL99AC1B138	RE37ABP324
MCL65RBP 134	MCL82RB 157	MCL99AC1BP138	RE37RB 324
MCL65RKB 134	MCL83RB 167	MCL99RB	RE37RBP324
MCL66A24B	MCL83RBP 167	MCL99RBP 138	RE418T326
MCL66A24BP155	MCL83RK 167	MCL99RC1B 138	RE52AB323
MCL66AB155	MCL84RB 169	MCL99RC1BP 138	RE52ARK 323
MCL66ABP155	MCL84RBP 169	QH16CTS291	RE52RB 323
MCL66APG155	MCL85AB158	QH16CTSP291	RT10A1B
MCL66APGP155	MCL85ABP158	QH36CTS291	RT10AB 325
MCL66AS 155	MCL85AS 158	QH36CTSP291	RT10R1B
MCL66CAB155	MCL85RS158	RB10A292	RT10RB
MCL66CABP155	MCL86AB159	RBL10AS 93	RT150W12B 326
MCL66CRB 155	MCL86ABP159	RBL10CA92	RT150W12BP326
MCL66CRBP 155	MCL86RB 159	RBL10CC92	RT150WBD 326
MCL66R24B 155	MCL86RBP 159	RBL13AB94	RT150WBDP 326
MCL66R24BP 155	MCL88RCB 166	RBL14AB94	RT150Y1B 327
MCL66RB 155	MCL88RCBP 166	RC 320	RT150Y1BP 327
MCL66RBP 155	MCL90AS 131	RCP 320	RT150Y1DB327
MCL66RPG 155	MCL90RS131	RE10018T 326	RT150Y1DBP327
MCL66RPGP 155	MCL914R1PG 168	RE10AB 323	RT150Y2B327
MCL66RS155	MCL91AB131	RE10ABP323	RT150Y2BP 327
MCL67AB134	MCL91ABP131	RE10AK 323	RT150Y2DB327
MCL67ABP134	MCL91AK131	RE10ARFK 323	RT150Y2DBP327
MCL67ARB 137	MCL91RB 131	RE10RB 323	RT21AB325
MCL67ARBP137	MCL91RBP 131	RE10RBP323	RT21RB325
MCL67RB 134	MCL91RK 131	RE10RK 323	RTR0315066CB326
MCL67RBP 134	MCL922RB 164	RE11AB323	RTR03150711CB326
MCL70RB 166	MCL922RBP 164	RE11ABP323	RTR03150711CBP 326
MCL70RBF2166	MCL93RB 168	RE11RB 323	RTR1015066CB326
MCL70RBF2P 166	MCL93RBP 168	RE11RBP323	RTR10150711CB326
MCL70RBP 166	MCL93RK 168	RE12AK323	RTR10150WB326
MCL70RCB 166	MCL93RPG168	RE12ARK 323	RTR10150WBP326
MCL70RCBP 166	MCL93RPGP168	RE12RK 323	RTR15066B326
MCL70RCGB 166	MCL95AB159	RE13AB324	RTR15066BP326
MCL70RS166	MCL95ABF159	RE13ABP324	RTR15066PB326
MCL71RB 156	MCL95ABFP159	RE13RB 324	RTR15066PBP 326
MCL71RBP 156	MCL95ABP159	RE13RBP324	RTR150711B326
MCL73AB154	MCL95AS 159	RE15AB323	RTR150711BP 326
MCL73ABP154	MCL95RB 159	RE15ABP323	RTR150711PB 326
MCL73RB 154	MCL95RBF159	RE15AK323	RTR150711PBP 326
MCL73RBP 154	MCL95RBFP 159	RE15ARK 323	RTRE150GB 327
MCL75AB134	MCL95RBP159	RE15RB 323	RTRE150GBP 327
MCL75ABP134	MCL95RS159	RE15RBP323	RTRE150OB 327
MCL75RB 134	MCL964RB 167	RE15RK 323	RTRE150OBP 327
MCL75RBP 134	MCL96AB131	RE18T326	RTRE150RB 327
MCL76AB156	MCL96ABP131	RE2018T326	RTRE150RBP 327
MCL76ABP156	MCL96RB131	RE21 AB 324	RV60BBK320
MCL76AS 156	MCL96RBP 131	RE21ABP324	RV60BBKP 320
MCL76RB 156	MCL97RB 169	RE21ARK 324	RV60BK320
MCL76RBP 156	MCL97RBP 169	RE21AS324	RV60BKP 320
MCL76RS 156	MCL97RK 169	RE21RB 324	RVCST90BL299
MCL77AB134	MCL97RPG 169	RE21RBP324	RVCST90BR 299
MCL77ABP134	MCL97RPGP169	RE21RS 324	RVIL21 308
MCL77RB 134	MCL98RB 165	RE21T326	RVIL21P308
MCL77RBP 134	MCL98RBP165	RE31AS324	RVIL21S

RVIL22	308	RVST61S	298	SLL72AB2	90	ST45RBP	230
RVIL22P	308	RVSTB60	298	SLL72AB2P	90	ST45RGB	230
RVIL22S		RVSTB60P		SLL72AKB1	90	ST45RGBP	230
RVIL35		RVSTB61		SLL72AKB1P	90	ST45RK	230
RVIL35P		RVSTB61P		SLL72AKB2		ST45RS	
RVILL33		RVSTL0060		SLL72AKB2P		ST46RB	
RVILL33FS		RVSTL0060P		SLL81ACB1		ST46RBP	
RVILL33P		RVSTL0060RFK		SLL81ACBP1		ST47RB	
RVILL33PB		RVSTL0061		SLL81CB 1		ST47RBP	
RVILL34		RVSTL0061P		SLL81CBP 1		ST47RKB	
RVILL34FS		RVSTL10		SLL93AB		ST47RKBP	
RVILL34P		RVSTL10K		SLL93ABP		ST4RB	
RVILL34F		RVSTL10P		SLL93RB		ST4RBP	
RVILL39P		RVSTL11		SLL93RBP		ST4RS	
RVILL40		RVSTL11P		ST16RB2		ST51RB	
RVILL40FS		RVSTL20		ST16RBP2		ST51RBP	
RVILL40P		RVSTL20K		ST16RS 2		ST51RS	
RVPL1A		RVSTL20P		ST17RB2		ST52AA	
RVPL1AP		RVSTL21		ST17RBP2	43	ST52AAP	
RVPL1C		RVSTL21P		ST17RS 2		ST52RA	
RVPL1CP		RVSTL60	296	ST20RS 2	38	ST52RB	
RVPL3A		RVSTL60P	296	ST21RS 2	38	ST52RBP	237
RVPL3AP	301	RVSTL60S	296	ST24RB2	38	ST53AAB	237
RVPL3C	301	RVSTL61	296	ST24RBP2	38	ST53AABP	237
RVPL3CFS	301	RVSTL61P	296	ST25RB2	38	ST56RS	245
RVPL3CP	301	RVSTL61S	296	ST25RBP2	38	ST57RS	245
RVPL5A	302	RVSTLB0060	297	ST26RPG 2	43	ST5RB	242
RVPL5AB	302	RVSTLB0060P	297	ST26RPGP 2	43	ST5RBP	242
RVPL5ABP	302	RVSTLB0061	297	ST27RPG 2	43	ST5RS	242
RVPL5AFS	302	RVSTLB0061P	297	ST27RPGP 2	43	ST60RB	
RVPL5AP		RVSTLB60	296	ST2RB2	41	ST60RBP	246
RVPL5CB	302	RVSTLB60FS	296	ST2RBP2	41	ST60RS	
RVPL5CBP		RVSTLB60P		ST2RHB 2		ST64RB	
RVPL7A		RVSTLB61		ST31RS 2		ST64RBP	
RVPL7AB		RVSTLB61FS		ST33AB 2		ST65RB	
RVPL7ABP		RVSTLB61P		ST33ABP 2		ST65RBP	
RVPL7AP		SLL15AC1B		ST33RB		ST6RB	
RVPL7C		SLL15ACC2B		ST33RBP		ST6RBP	
RVPL7CB		SLL15ARC3B		ST34RB		ST6RPG	
RVPL7CBFS		SLL15C1B		ST34RBP		ST6RPGP	
RVPL7CBP		SLL16C1B		ST36RPG		ST6RS	
RVPL7CFS		SLL17AC1B		ST36RPGP2		ST70AB	
RVPL7CP		SLL17ACTB SLL17ACC2B		ST36RS 2		ST70AB	
						ST70AS	
RVPLL11AB		SLL17ARC3B		ST37RPG			
RVPLL11ABP		SLL17C1B		ST37RPGP2		ST70RB	
RVPLL11AFS		SLL22ACB		ST37RS 2		ST70RBP	
RVPLL11CB		SLL22ACBP		ST3RB2		ST70RBTK	
RVPLL11CFS		SLL43AB1		ST3RBP2		ST70RBTKP	
RVPLL13AB		SLL43AB1P		ST3RHB 2		ST70RK	
RVPLL13CB		SLL43AB2		ST40RB2		ST70RS	
RVPLL13CBP		SLL43AB2P		ST40RBP2		ST74AB	
RVPLL13CWB	300	SLL43AKB1		ST40RS 2	:34	ST74ABP	
RVSL21	303	SLL43AKB1P	89	ST42RB2	34	ST74RB	232
RVSL21P	303	SLL43AKB2	89	ST42RBP2	34	ST74RBP	
RVSL31	303	SLL43AKB2P	89	ST44AB 2	30	ST75AB	232
RVSL31P		SLL51ACB	99	ST44ABP 2	30	ST75ABP	232
RVST60	298	SLL51ACBP	99	ST44RB2	30	ST75AS	232
RVST60P	298	SLL51CB	99	ST44RBP2	30	ST77AB	232
RVST60S		SLL51CBP	99	ST45AB2		ST77ABP	
RVST61	298	SLL72AB1	90	ST45ABP2	30	ST7RB	240
RVST61P	298	SLL72AB1P	90	ST45RB2		ST7RBP	240

STRPEC 240 SILLOGREGE 65 SILLIVRB 70 STRECP 240 SILLOGREGE 65 SILLIVRB 67 SILLARBER 70 STRES 240 SILLOGREGE 65 SILLIVRB 67 SILLISARDBB 54 STRES 239 SILLOGREG 65 SILLIZIRCHEGE 9 SILLISARDBB 54 STRES 239 SILLOGREG 65 SILLIZIRCHEGE 9 SILLISARDBB 54 STRES 239 SILLOGREG 65 SILLIZIRCHEGE 9 SILLISARDBB 54 STRES 239 SILLOJACB 16 SILLIZARB 35 SILLISARDBB 70 STORAB 235 SILLOLACB 16 SILLIZARB 35 SILLISRB 70 STORAB 235 SILLOLACB 16 SILLIZACB 35 SILLIFRB 70 STORAB 236 SILLOLACB 16 SILLIZACB 35 SILLIFRB 58 STORAB <th>0.770.0</th> <th>0.40</th> <th>071,000,000</th> <th>071114000</th> <th>071.1.400</th>	0.770.0	0.40	071,000,000	071114000	071.1.400
STREBB 239 STILOPARB 65 STIL17RBP 67 STILSAARDBB 54					
STRERB					
SIRBER 239 STILOPREP 65 STILIZINCHECE 9 SILISAARPBB 54 SIRBES 239 SILOOPREPCE 65 STILIZAR 35 SILISAARPBB 54 SIPOAB 235 SILOPRE 65 STILIZAR 35 SILISAIRB 70 STPOARP 235 SILIOIAGA 65 STILIZEIZ24BP 35 SILISAIRP 70 STPOARP 235 SILIOIAGA 16 STILZERE 35 SILISRIBP 70 STPOARP 235 SILIOIAGA 16 SILIZERE 35 SILIGREP 70 STPOARP 236 SILIOIRIZABP 16 SILIZECEB 35 SILIGREB 58 STPZARP 236 SILIOIRICAB 16 SILIZECEB 35 SILIGREB 58 STPZARP 236 SILIORICAB 16 SILIZECEB 35 SILIGREB 58 STPZARP 236 SILIORICAB 16 SILIZECEB 35 SILIARREB					
SIBBEH 239 STILOSAPPEG 65 STIL 2AB 35 STILSARPBEP 57 STPOAB 235 STLOOPPEG 65 STIL 2ABP 35 STLISRIB 70 STPOABP 235 STLOOPPEG 65 STIL 2RI 224B 35 STLISRIBE 70 STPOAB 235 STLIOLAGE 16 STLIZERE 35 STLISRIBE 70 STPOAB 235 STLIOLAGE 16 STLIZERE 35 STLISRIBE 70 STPOAB 236 STLOIR AC 16 STLIZERE 35 STLIGRE 58 STP2AB 236 STLOIR CB 16 STLIZERCE 35 STLIGRE 58 STP2RB 236 STLOIR CB 16 STLIZERCE 35 STLIGRE 58 STPSRB 239 STLOIR CB 16 STLIZERCE 35 STLIGRE 69 STPSRB 239 STLOIR CB 16 STLIZERCE 35 STLIGRE 69					
SIBBS. .239 SILOOPREP. .65 STIL/2R/PB. .35 SILISRIB. .70 STPOABP .235 SILOIAB. .16 SIL/2PL/24BP. .35 SILISRIB. .70 STPORBP. .235 SILIOIACB. .16 SIL/2PL/24BP. .35 SILISRIB. .70 STPORBP. .235 SILIOIACCB. .16 SIL/2PR/B. .35 SILIORIBE. .58 STPZAB. .236 SILIORIZ/2BP. .16 SIL/2PKCB. .35 SILIORIBE. .58 STPZRB. .236 SILIORIR SILORER. .16 SIL/2PKCB. .35 SILIORIBE. .58 STPZRB. .236 SILIORER. .16 SIL/2PKCB. .35 SILIARIBE. .58 STPZRB. .239 SILIORER. .16 SIL/2PKCB. .35 SILIARIBR. .69 STPRB. .239 SILIORER. .17 SILIARIBR. .35 SILIARIBR. .69 STPRB. .239 SILIORER. .17 SI					
STOOAB 235 STLOPRE 35 STLISRIBE 70 STOOAB 235 STLIDIABR 16 STLI2RIZABE 35 STLISRE 70 STOORB 235 STLIOIACB 16 STLI2RE 35 STLISRE 70 STOZAB 236 STLIOIACB 16 STLI2RE 35 STLI6RE 88 STYZAB 236 STLIOIACB 16 STLI2RCB 35 STLI6RE 58 STYZAB 236 STLIOIRE 16 STLI2RCB 35 STLI6RE 58 STYZERB 236 STLIOIRE 16 STLIZECKB 35 STLI6REB 58 STYPERB 239 STLIOIRE 16 STLIZEKZB 35 STLI6REB 69 STRWB 239 STLIOIRECB 17 STLIQUECKB 35 STLIARE 69 SIPKB 239 STLIOIREB 17 STLIQUECKB 35 STLIARE 69 SIPKB 239 <t< td=""><td></td><td></td><td></td><td></td><td></td></t<>					
SPORAR 235 STLIOLAR 16 STLI224BR 35 STLISBR 70 STOORB 235 STLIOLACB 16 STLI2RB 35 STLI5RBR 70 STOZAB 236 STLIOLACB 16 STLI2RCB 35 STLI6IRB 58 STYZAB 236 STLIOLACBF 16 STLI2RCB 35 STLI6IRB 58 STYZAB 236 STLIOLACBF 16 STLI2RCBB 35 STLI6IRB 58 STYZRB 236 STLIOLIRCBB 16 STLI2RCKB 35 STLI6IRB 58 STYPER 239 STLIOLIRCBB 16 STLI2RK 35 STLIARBB 69 STYPER 239 STLIOLIRCBB 17 STLI2RKAB 35 STLIARBB 69 STYPER 239 STLIOLORCBB 17 STLI2RKAB 35 STLIARBB 69 STYPER 239 STLIOLORCBB 17 STLI2RKZBB 35 STLIARBBB 69 <td></td> <td></td> <td></td> <td></td> <td></td>					
STOPORB .235 STILIO IA AR 16 STIL 2RB .35 STIL 18RB .75 STOPAB .236 STILIO IA CBP .16 STIL 2RCB .35 STIL 16RB .58 STP2AB .236 STILIO IRI 124B .16 STIL 2RCB .35 STIL 16RB .58 STP2RB .236 STILIO IRI 1224B .16 STIL 2RCB .35 STIL 16RB .58 STP2RB .239 STILIO IRICB .16 STIL 2RCB .35 STIL 16RB .69 STPRBH .239 STILIO IRCB .16 STIL 2RCB .35 STIL 16RB .69 STPRBH .239 STILIO IRCFB .17 STIL 2RCB .35 STIL 16RB .69 STPRS .239 STILIO IRCFB .17 STIL 2RCBB .35 STIL 16RB .69 STILOO IRCBE .17 STIL 2RCBB .35 STIL 16RB .69 STILOO IRCBE .17 STIL 2RCBB .35 STIL 16RB .69					
STOPOREP 235 STILIOI ACB 16 STIL2REP 35 STIL6IRER 58 ST92ABP 236 STIL0IRICZBE 16 STIL2RCEP 35 STIL6IRER 58 ST92ABP 236 STIL0IRIZZBE 16 STIL2RCER 35 STIL6IRER 58 ST9ZRB 236 STIL0IRIZZBEP 16 STIL2RCER 35 STIL6IRER 58 ST9ZRB 239 STIL0IRCER 16 STIL2RKSB 35 STIL6IRER 69 ST9RBB 239 STIL0IRCEP 16 STIL2RK3B 35 STIL6RB 69 ST9RS 239 STIL0IRCEB 17 STIL2RK3B 35 STIL6RB 69 STRN 239 STIL0IRCEB 17 STIL2RK3B 35 STIL6RB 69 STPRS 239 STIL0IRCEB 17 STIL2RK3B 35 STIL6RB 69 STROLOIRER 71 STL0IRCEB 17 STL12RK3B 35 STL17ARCEB					
SIPZAB 236 SILIOI ACEP 16 STLIZECB 35 SILIOIRED 58 STPZABP 236 STLIOIRIZ24B 16 STLIZECBP 35 STLIOIREB 58 STPZRBP 236 STLIOIRED 16 STLIZECKBP 35 STLIOIREB 58 STYRBB 239 STLIOIRED 16 STLIZEKCBP 35 STLIAMIRB 69 STYRBB 239 STLIOIREDB 16 STLIZEKZBP 35 STLIAMIRB 69 STPRBB 239 STLIOIRECB 16 STLIZEKZBP 35 STLIAMIRB 69 STPRS 239 STLIOIRECPB 17 STLIZEKZBP 35 STLIAMIRB 69 STROIOIAGE 71 STLIORECPB 17 STLIZEKZBP 35 STLIAMIRB 69 STROIOIAGE 71 STLIORECPB 17 STLIZEKZBP 35 STLIAMIRB 69 STROIOIAGE 71 STLIORECPB 17 STLIZEKZBP 35 STLIAMIRB<					
STP2RB				**	
STYPERB 236 STILIOIREZ/ABP 16 STILIZECKB 35 STILIOIRED 58 STYRBP 236 STILIOIRED 16 STILIZECKB 35 STILIOHRED 69 STYRBB 239 STILIOIRED 16 STILIZECKB 35 STILIARED 69 STYRBB 239 STILIOIREDB 16 STILIZECKB 35 STILIAREB 69 STYRS 239 STILIOIRECB 17 STILIZEKCBP 35 STILIAREB 69 STROIOI 6RBP 71 STILIOIRECPB 17 STILIZEKCBP 35 STILITSAMFB 41 STILOOI 6RP2G 71 STILIOIRECMBP 17 STILIZEKKB 35 STILTSAMFB 41 STILOOI 6RP2G 71 STILIOIREMB 17 STILIZEKKB 35 STILTSAMFB 31 STILOOI 7RBP 71 STILIOIREMB 16 STILZEKKB 35 STILTSAMFB 31 STILOOIRES 71 STILIOIREMB 17 STILIZEKBB					
STYPER 236 STLIOIRB 16 STLIZECKEP 35 STLIGHTER 69 STYRBP 239 STLIOIRCB 16 STLIZECKEP 35 STLIGHTER 69 STYRRBP 239 STLIOIRCB 16 STLIZECKEP 35 STLIGHTER 69 STYRRB 239 STLIOIRCB 16 STLIZEKZBP 35 STLIGHTER 69 STOLOIABR 71 STLIOIRCFB 17 STLIZEKZBP 35 STLIFARAFE 41 STLOOIABR 71 STLIOIRCFBP 17 STLIZEKZBP 35 STLITARAFE 41 STLOOIABP2G 71 STLIOIRCFMBP 17 STLIZEKZBP 35 STLITARAFE 41 STLOOIARP2G 71 STLIOIRCMBP 16 STLIZEKBP 35 STLITARREP 31 STLOOIARP2G 71 STLIOIREB 17 STLIZEKBP 35 STLIZERPP 31 STLOOIARP2G 71 STLIOIREB 17 STLIZERWB 35					
SIPRB .239 STLI OIRBE 16 STLI ZRKZB .35 STLI ANTREP 69 ST9RBP .239 STLI OIRCB 16 STLI ZRKZB .35 STLI ARBB .69 STPRB .239 STLI OIRCB 17 STLI ZRKZBP .35 STLI ARBB .69 STROIG RES .71 STLI OIRCFBP 17 STLI ZRKZBP .35 STLI ARBB .69 STROIG REPZG .71 STLI OIRCFMB 17 STLI ZRKZBP .35 STLI 75AMFB .41 STLOOI 6RP2G .71 STLI OIRCFMBP .17 STLI ZRKZBP .35 STLI 75AMFB .41 STLOOI 6RP2G .71 STLI OIRCMBP .16 STLI 2RKZBP .35 STLI 75AMFB .41 STLOOI 78P2G .71 STLI OIRCMBP .16 STLI 2RKZBP .35 STLI 75RRBP .31 STLOOI 78P2G .71 STLI OIRCMBP .17 STLI COIRCMBP .17 STLI COIRCMBP .35 STLI 75RRFB .31 STLOOI 78P2G					
STYREP					
STYPKIB .239 STLIORCSP 16 STLIZEKZBP .35 STLIARRB .69 STRO .239 STLIOIRCFB .17 STLIZEKASBP .35 STLIARRS .69 STLOOI 6RB .71 STLIOIRCFBB .17 STLIZEKASBP .35 STLIARAMB .41 STLOOI 6RPSCO .71 STLIOIRCFMB .17 STLIZEKASBP .35 STLIARAMB .41 STLOOI 6RPSCO .71 STLIOIRCFMB .16 STLIZEKAS .35 STLIARRBB .31 STLOOI 6RPSCO .71 STLIOIRCMB .16 STLIZEKUSP .35 STLIARREBB .31 STLOOITRES .71 STLIOIREBB .17 STLIZELVB .35 STLIARRCFPBP .31 STLOOITRESCO .71 STLIOIREMB .17 STLIZELVBP .35 STLIARRCFPBP .31 STLOOITRESCO .71 STLIOIREMB .17 STLIZELVBP .35 STLIARREGEPB .31 STLOOITRESCO .71 STLIOIREMB .1					
STUDO STUD					
STLOOLARB			STL101RCBP 16	STL12RK2BP35	
STL0016RBP	ST9RS	. 239			
STLOO16RP2G			STL101RCFBP 17	STL12RK3BP35	STL175AMFB41
STL0016RP2GP 71 STL101RCMB 16 STL12RKB 35 STL178RPC 31 STL0017RB 71 STL101RFB 16 STL12RKBP 35 STL178RCCFPB 31 STL0017RB 71 STL101RFB 17 STL12RLVBP 35 STL178RFPB 31 STL0017RP2G 71 STL101RFMB 17 STL12RLVBB 35 STL178RFPB 31 STL0017RP2G 71 STL101RFMB 17 STL12RMB 35 STL178RFPB 31 STL0017RP2G 71 STL101RFMB 17 STL12RMB 35 STL178RFPB 31 STL0017RS 71 STL101RKB 16 STL12RS 35 STL178RK1BP 31 STL002AB 38 STL101RKB 16 STL13AB 21 STL179RB 48 STL002RB 38 STL101RMB 16 STL13AB 21 STL179RB 48 STL002RB 38 STL102RBB 16 STL13R1224B 21 STL17NT			STL101RCFMB 17		STL175AMFBP 41
STL0016RS 71 STL101RCMBP 16 STL12RKPB 35 STL178RCCFPB 31 STL0017RB 71 STL101RFB 17 STL12RLVB 35 STL178RCCFPBP 31 STL0017RP2G 71 STL101RFMB 17 STL12RMB 35 STL178RFPBP 31 STL0017RP2G 71 STL101RFMBP 17 STL12RMB 35 STL178RF1BP 31 STL0017RP2G 71 STL101RFMBP 17 STL12RMBP 35 STL178RF1BP 31 STL0017RS 71 STL101RFMBP 16 STL12RMBP 35 STL178RF1BP 31 STL002AB 38 STL101RKBP 16 STL13ABP 21 STL179RBP 48 STL002ABP 38 STL101RMBP 16 STL13R1224BP 21 STL17NTRBP 49 STL002REB 38 STL100RMBP 61 STL13R1224BP 21 STL17NTRBP 69 STL002REB 38 STL109RBP 61 STL13RBP 21<	STL0016RP2G	71	STL101RCFMBP17	STL12RK4BP35	STL178RB31
STL0017RB	STL0016RP2GP	71	STL101RCMB16	STL12RKB35	STL178RBP31
STLOOTREPS	STL0016RS	71	STL101RCMBP16	STL12RKBP35	STL178RCCFPB31
STL0017RP2G	STL0017RB	71	STL101RFB17	STL12RLVB35	STL178RCCFPBP31
STL0017RP2GP	STL0017RBP	71	STL101RFBP17	STL12RLVBP35	STL178RFPB31
STL0017RS. 71 STL101RKB. 16 STL12RS. 35 STL178RK1BP. 31 STL002AB. 38 STL101RKBP. 16 STL13AB. 21 STL179RB. 48 STL002ABP. 38 STL101RMBP. 16 STL13ABP. 21 STL179RBP. 48 STL002RB. 38 STL101RMBP. 16 STL13R1224B. 21 STL177RBP. 69 STL002RFB. 38 STL108RB. 61 STL13RB. 21 STL17RB. 69 STL002RFB. 38 STL109RB. 61 STL13RB. 21 STL17RB. 69 STL002RK. 38 STL109RB. 61 STL13RFB. 22 STL17RS. 69 STL002RK. 38 STL111AB. 29 STL13RFB. 22 STL17RS. 69 STL002RK2BP. 38 STL111ACB. 29 STL13RFB. 22 STL190AB. 56 STL002RMB. 38 STL111ACB. 29 STL3RFB. 22 STL	STL0017RP2G	71	STL101RFMB 17	STL12RMB35	STL178RFPBP31
STL002AB 38 STL101RKBP 16 STL13AB 21 STL17PRB 48 STL002ABP 38 STL101RMB 16 STL13ABP 21 STL17PRBP 48 STL002RB 38 STL101RMBP 16 STL13R1224B 21 STL17NTRBP 69 STL002RBP 38 STL108RBP 61 STL13R1224BP 21 STL17NTRBP 69 STL002RFB 38 STL109RB 61 STL13RB 21 STL17RBP 69 STL002RFB 38 STL109RB 61 STL13RFB 21 STL17RBP 69 STL002RK2B 38 STL110AB 29 STL13RFB 22 STL19OAB 56 STL002RX2BP 38 STL111ACB 29 STL13RFB 22 STL19OAB 56 STL002RXBB 38 STL111ACB 29 STL13RFB 22 STL19OAB 56 STL002RMB 38 STL111RCB 29 STL13RFBB 22 STL19OAB	STL0017RP2GP	71	STL101RFMBP17	STL12RMBP35	STL178RK1B31
STL002AB 38 STL101RKBP 16 STL13AB 21 STL17PRB 48 STL002ABP 38 STL101RMB 16 STL13ABP 21 STL17PRBP 48 STL002RB 38 STL10BRB 16 STL13R1224B 21 STL17NTRB 69 STL002RBP 38 STL10BRB 61 STL13R1224BP 21 STL17NTRBP 69 STL002RFB 38 STL109RB 61 STL13RB 21 STL17RB 69 STL002RFB 38 STL109RB 61 STL13RFB 21 STL17RBP 69 STL002RK2B 38 STL110ABB 29 STL13RFB 22 STL17RS 69 STL002RK2B 38 STL111ABB 29 STL13RFB 22 STL190AB 56 STL002RK2B 38 STL111ACB 29 STL13RFB 22 STL190AB 56 STL002RMB 38 STL111RCB 29 STL13RFBB 22 STL190AB 56 <td>STL0017RS</td> <td> 71</td> <td>STL101RKB16</td> <td>STL12RS35</td> <td></td>	STL0017RS	71	STL101RKB16	STL12RS35	
STL002ABP 38 STL101RMB 16 STL13ABP 21 STL17PRBP 48 STL002RB 38 STL101RMBP 16 STL13R1224B 21 STL17NTRB 69 STL002RPB 38 STL108RBP 61 STL13R1224BP 21 STL17NTRB 69 STL002RFB 38 STL109RBP 61 STL13RBB 21 STL17RBP 69 STL002RK 38 STL109RBP 61 STL13RFB 22 STL17RBP 69 STL002RK 38 STL109RBP 61 STL13RFB 22 STL17RBP 69 STL002RK2B 38 STL111ABP 29 STL13RFBP 22 STL190ABP 56 STL002RK2BP 38 STL111ACB 29 STL13RFBB 22 STL190ABP 56 STL002RMB 38 STL111ACB 29 STL13RFBB 22 STL190RBP 56 STL002RMB 38 STL111RCB 29 STL13RFBB 22 STL190RBP			STL101RKBP16	STL13AB21	STL179RB 48
STL002RB 38 STL101RMBP 16 STL13R1224B 21 STL17NTRB 69 STL002RBP 38 STL108RB 61 STL13R1224BP 21 STL17NTRB 69 STL002RFB 38 STL109RB 61 STL13RB 21 STL17RB 69 STL002RFBP 38 STL109RB 61 STL13RFB 21 STL17RB 69 STL002RK2B 38 STL111AB 29 STL13RFB 22 STL190AB 56 STL002RK2B 38 STL111AB 29 STL13RFBB 22 STL190AB 56 STL002RMB 38 STL111ABB 29 STL13RFMB 22 STL190AB 56 STL002RMB 38 STL111ACBB 29 STL13RFMB 22 STL190AB 56 STL002RMB 38 STL111RCBB 29 STL13RFMB 22 STL190RBP 56 STL003A1224B 24 STL111RCBB 29 STL13RCB 21 STL201RFMB					
STL002RBP 38 STL108RB 61 STL13R1224BP 21 STL17RBP 69 STL002RFB 38 STL109RBP 61 STL13RB 21 STL17RB 69 STL002RFB 38 STL109RBP 61 STL13RFB 21 STL17RBP 69 STL002RK 38 STL109RBP 61 STL13RFB 22 STL17RS 69 STL002RK2B 38 STL111AB 29 STL13RFBP 22 STL190AB 56 STL002RMB 38 STL111ACB 29 STL13RFHXB 22 STL190AB 56 STL002RMB 38 STL111ACB 29 STL13RFHXB 22 STL190RB 56 STL002RMB 38 STL111ACB 29 STL13RFMB 22 STL190RB 56 STL003L2AB 38 STL111R224B 29 STL13RFB 22 STL190RB 56 STL003A1224B 24 STL111RB 29 STL13RHB 21 STL201RFMB					
STL002RFB. 38 STL108RBP 61 STL13RB 21 STL17RB 69 STL002RFBP 38 STL109RB 61 STL13RBP 21 STL17RBP 69 STL002RK 38 STL109RBP 61 STL13RFB 22 STL17RS 69 STL002RK2B 38 STL111AB 29 STL13RFBP 22 STL190AB 56 STL002RMB 38 STL111ACB 29 STL13RFMB 22 STL190ABP 56 STL002RMB 38 STL111ACB 29 STL13RFMB 22 STL190RBP 56 STL002RMB 38 STL111ACB 29 STL13RFB 22 STL190RBP 56 STL002RMB 38 STL111ACBP 29 STL13RFB 22 STL190RBP 56 STL002RS 38 STL111RCBP 29 STL13RFB 22 STL190RPG 56 STL003A1224B 24 STL111RCBP 29 STL13RGB 21 STL201RFMB					
STL002RFBP 38 STL109RB 61 STL13RBP 21 STL17RBP 69 STL002RK 38 STL109RBP 61 STL13RFB 22 STL17RS 69 STL002RK2B 38 STL111AB 29 STL13RFBP 22 STL19OAB 56 STL002RK2BP 38 STL111ABP 29 STL13RFMB 22 STL19OABP 56 STL002RMB 38 STL111ACB 29 STL13RFMB 22 STL19OABP 56 STL002RMBP 38 STL111ACBP 29 STL13RFMBP 22 STL19ORPG 56 STL002RS 38 STL111R1224BP 29 STL13RFB 22 STL19ORPG 56 STL003A1224B 24 STL111R1224BP 29 STL13RGB 21 STL201RPMBP 56 STL003A1224BP 24 STL111RCB 29 STL13RHBB 21 STL201RPMBP 6 STL003AB 24 STL111RCB 29 STL13RHBB 21 STL201X					
STL002RK 38 STL109RBP 61 STL13RFB 22 STL17RS 69 STL002RK2B 38 STL111AB 29 STL13RFBP 22 STL190AB 56 STL002RK2BP 38 STL111ABP 29 STL13RFMB 22 STL190AB 56 STL002RMB 38 STL111ACB 29 STL13RFMB 22 STL190RB 56 STL002RMBP 38 STL111ACBP 29 STL13RFMBP 22 STL190RBP 56 STL002RS 38 STL111R1224B 29 STL13RFBB 22 STL190RPG 56 STL003A1224B 24 STL111R1224B 29 STL13RGB 21 STL190RPG 56 STL003A1224BP 24 STL111RB 29 STL13RHBB 21 STL201RFMB 6 STL003AB 24 STL111RCB 29 STL13RHBB 21 STL201RFMBP 6 STL003R1224B 24 STL111RCBB 29 STL13RHBB 21 STL201X					
STL002RK2B 38 STL111AB 29 STL13RFBP 22 STL19OAB 56 STL002RK2BP 38 STL111ABP 29 STL13RFHXB 22 STL19OABP 56 STL002RMB 38 STL111ACB 29 STL13RFMB 22 STL19ORB 56 STL002RMBP 38 STL111R1224B 29 STL13RFMBP 22 STL19ORBP 56 STL002RMS 38 STL111R1224B 29 STL13RFMBP 22 STL19ORPG 56 STL003A1224B 24 STL111R1224BP 29 STL13RGB 21 STL19ORPGP 56 STL003A1224B 24 STL111RB 29 STL13RGBP 21 STL201RFMB 6 STL003AB 24 STL111RCB 29 STL13RH1B 21 STL201RFMBP 6 STL003R1224B 24 STL111RCB 29 STL13RH1BP 21 STL201XRFMBP 7 STL003R1224BP 24 STL111RCBP 30 STL13RH3BP 21				STI 13RFB 22	
STL002RK2BP 38 STL111ABP 29 STL13RFHXB 22 STL190ABP 56 STL002RMB 38 STL111ACB 29 STL13RFMB 22 STL190RB 56 STL002RMBP 38 STL111ACBP 29 STL13RFMBP 22 STL190RBP 56 STL002RS 38 STL111R1224B 29 STL13RFS 22 STL190RPG 56 STL003A1224B 24 STL111R1224BP 29 STL13RGB 21 STL190RPGP 56 STL003A1224BP 24 STL111RB 29 STL13RGBP 21 STL201RFMB 6 STL003AB 24 STL111RCB 29 STL13RHB 21 STL201RFMBP 6 STL003ABP 24 STL111RCB 29 STL13RHBP 21 STL201XR1224B 7 STL003R1224B 24 STL111RCFB 30 STL13RH3B 21 STL201XR1224BP 7 STL003R1224BP 24 STL111RCFB 30 STL13RH3B 21					
STL002RMB 38 STL111ACB 29 STL13RFMB 22 STL190RB 56 STL002RMBP 38 STL111ACBP 29 STL13RFMBP 22 STL190RBP 56 STL002RS 38 STL111R1224B 29 STL13RFS 22 STL190RPG 56 STL003A1224B 24 STL111RBP 29 STL13RGB 21 STL190RPGP 56 STL003A1224BP 24 STL111RBP 29 STL13RGBP 21 STL201RFMB 6 STL003AB 24 STL111RCB 29 STL13RHBP 21 STL201RFMB 6 STL003ABP 24 STL111RCB 29 STL13RHBP 21 STL201XR1224B 7 STL003R1224B 24 STL111RCBP 29 STL13RH3B 21 STL201XR1224BP 7 STL003R1224BP 24 STL111RCFB 30 STL13RH3B 21 STL201XRB 7 STL003R1224BP 24 STL111RCFB 30 STL13RHBB 21 STL201XRB 7 STL003RB 24 STL111RCFB 30					
STL002RMBP 38 STL111ACBP 29 STL13RFMBP 22 STL190RBP 56 STL002RS 38 STL111R1224B 29 STL13RFS 22 STL190RPG 56 STL003A1224B 24 STL111R1224BP 29 STL13RGB 21 STL190RPGP 56 STL003A1224BP 24 STL111RB 29 STL13RGBP 21 STL201RFMB 6 STL003AB 24 STL111RCB 29 STL13RH1B 21 STL201RFMBP 6 STL003ABP 24 STL111RCB 29 STL13RH1BP 21 STL201XR1224B 7 STL003R1224B 24 STL111RCBP 29 STL13RH3B 21 STL201XR1224BP 7 STL003R1224BP 24 STL111RCFB 30 STL13RH3BP 21 STL201XR1224BP 7 STL003R1224BP 24 STL111RCFB 30 STL13RH3BP 21 STL201XR1224BP 7 STL003R1224BP 24 STL111RCFB 30 STL13RH3BP					
STL002RS 38 STL111R1224B 29 STL13RFS 22 STL190RPG 56 STL003A1224B 24 STL111R1224BP 29 STL13RGB 21 STL190RPGP 56 STL003A1224BP 24 STL111RB 29 STL13RGBP 21 STL201RFMB 6 STL003AB 24 STL111RCB 29 STL13RH1B 21 STL201RFMBP 6 STL003RP 24 STL111RCB 29 STL13RH1BP 21 STL201XR1224B 7 STL003R1224B 24 STL111RCBP 29 STL13RH3BP 21 STL201XR1224BP 7 STL003R1224BP 24 STL111RCFB 30 STL13RH3BP 21 STL201XRBP 7 STL003RP 24 STL111RCFB 30 STL13RH3BP 21 STL201XRBP 7 STL003RB 24 STL111RCFB 30 STL13RHBB 21 STL201XRBP 7 STL003RFB 24 STL111RCFMB 30 STL13RKB 21 STL201XRFHXBP 8 STL003RFBP 24 STL111RCMB 2					
STL003A1224B 24 STL111R1224BP 29 STL13RGB 21 STL190RPGP 56 STL003A1224BP 24 STL111RB 29 STL13RGBP 21 STL201RFMB 6 STL003AB 24 STL111RBP 29 STL13RH1B 21 STL201RFMBP 6 STL003ABP 24 STL111RCB 29 STL13RH1BP 21 STL201XR1224B 7 STL003R1224B 24 STL111RCBP 29 STL13RH3B 21 STL201XR1224BP 7 STL003R1224BP 24 STL111RCFB 30 STL13RH3BP 21 STL201XR1224BP 7 STL003RB 24 STL111RCFBP 30 STL13RH3BP 21 STL201XRBP 7 STL003RBP 24 STL111RCFMB 30 STL13RHBBP 21 STL201XRFHXB 8 STL003RFB 24 STL111RCFMB 30 STL13RKBP 21 STL201XRFHXB 8 STL003RFBP 24 STL111RCMB 29 STL13RKB 21 STL211XRB 10 STL003RFMB 24 STL111RFB					
STL003A1224BP 24 STL111RB 29 STL13RGBP 21 STL201RFMB 6 STL003AB 24 STL111RBP 29 STL13RH1B 21 STL201RFMBP 6 STL003ABP 24 STL111RCB 29 STL13RH1BP 21 STL201XR1224B 7 STL003R1224B 24 STL111RCBP 29 STL13RH3B 21 STL201XR1224BP 7 STL003R1224BP 24 STL111RCFB 30 STL13RH3BP 21 STL201XRB 7 STL003RB 24 STL111RCFBP 30 STL13RHBB 21 STL201XRBP 7 STL003RFB 24 STL111RCFMB 30 STL13RHBBP 21 STL201XRFHXBP 8 STL003RFBP 24 STL111RCMB 29 STL13RKB 21 STL201XRFHXBP 8 STL003RFLB 24 STL111RCMB 29 STL13RKB 21 STL211XRB 10 STL003RFLBP 24 STL111RCMBP 29 STL13RKBP 21 STL211XRCBP 10 STL003RFMBP 24 STL111RFMB					
STL003AB 24 STL111RBP 29 STL13RH1B 21 STL201RFMBP 6 STL003ABP 24 STL111RCB 29 STL13RH1BP 21 STL201XR1224B 7 STL003R1224B 24 STL111RCBP 29 STL13RH3B 21 STL201XR1224BP 7 STL003R1224BP 24 STL111RCFB 30 STL13RH3BP 21 STL201XRB 7 STL003RB 24 STL111RCFBP 30 STL13RHBB 21 STL201XRBP 7 STL003RBP 24 STL111RCFMB 30 STL13RHBBP 21 STL201XRFHXB 8 STL003RFB 24 STL111RCFMBP 30 STL13RK 21 STL201XRFHXB 8 STL003RFBP 24 STL111RCFMBP 30 STL13RKB 21 STL211XRB 10 STL003RFLB 24 STL111RCMB 29 STL13RKB 21 STL211XRB 10 STL003RFMB 24 STL111RFB 30 STL13RLVB 21 STL211XRCB 10 STL003RFMBP 24 STL111RFMB 30					
STL003ABP 24 STL111RCB 29 STL13RH1BP 21 STL201XR1224B 7 STL003R1224B 24 STL111RCBP 29 STL13RH3B 21 STL201XR1224BP 7 STL003R1224BP 24 STL111RCFB 30 STL13RH3BP 21 STL201XRB 7 STL003RB 24 STL111RCFBP 30 STL13RHBB 21 STL201XRBP 7 STL003RBP 24 STL111RCFMB 30 STL13RHBBP 21 STL201XRFHXB 8 STL003RFB 24 STL111RCFMBP 30 STL13RK 21 STL201XRFHXBP 8 STL003RFBP 24 STL111RCMB 29 STL13RKB 21 STL211XRB 10 STL003RFLB 24 STL111RCMB 29 STL13RKB 21 STL211XRB 10 STL003RFLB 24 STL111RCMB 29 STL13RKBP 21 STL211XRCB 10 STL003RFMB 24 STL111RFB 30 STL13RLVB 21 STL211XRCB 10 STL003RFMBP 24 STL111RFMB					
STL003R1224B 24 STL111RCBP 29 STL13RH3B 21 STL201XR1224BP 7 STL003R1224BP 24 STL111RCFB 30 STL13RH3BP 21 STL201XRB 7 STL003RB 24 STL111RCFBP 30 STL13RHBB 21 STL201XRBP 7 STL003RBP 24 STL111RCFMB 30 STL13RHBBP 21 STL201XRFHXB 8 STL003RFB 24 STL111RCFMBP 30 STL13RKB 21 STL201XRFHXB 8 STL003RFBP 24 STL111RCFMBP 30 STL13RKB 21 STL201XRFHXBP 8 STL003RFLBP 24 STL111RCMB 29 STL13RKB 21 STL211XRB 10 STL003RFLBP 24 STL111RCMBP 29 STL13RKBP 21 STL211XRCB 10 STL003RFMB 24 STL111RFB 30 STL13RLVB 21 STL211XRCB 10 STL003RFMBP 24 STL111RFMB 30 STL13RMB10GK 21 STL211XRFHB 11 STL003RMB 24 STL111RHB					
STL003R1224BP 24 STL111RCFB 30 STL13RH3BP 21 STL201XRB 7 STL003RB 24 STL111RCFBP 30 STL13RHBB 21 STL201XRBP 7 STL003RBP 24 STL111RCFMB 30 STL13RHBBP 21 STL201XRFHXB 8 STL003RFB 24 STL111RCFMBP 30 STL13RK 21 STL201XRFHXBP 8 STL003RFBP 24 STL111RCMB 29 STL13RKB 21 STL211XRB 10 STL003RFLB 24 STL111RCMBP 29 STL13RKBP 21 STL211XRB 10 STL003RFLBP 24 STL111RFB 30 STL13RLVB 21 STL211XRCB 10 STL003RFMBP 24 STL111RFB 30 STL13RLVBP 21 STL211XRCBP 10 STL003RFMBP 24 STL111RFMB 30 STL13RMB 21 STL211XRCBP 10 STL003RFMBP 24 STL111RFMB 30 STL13RMB 21 STL211XRFHB 11 STL003RMB 24 STL111RFMB 2					
STL003RB 24 STL111RCFBP 30 STL13RHBB 21 STL201XRBP 7 STL003RBP 24 STL111RCFMB 30 STL13RHBBP 21 STL201XRFHXB 8 STL003RFB 24 STL111RCFMBP 30 STL13RK 21 STL201XRFHXBP 8 STL003RFBP 24 STL111RCMB 29 STL13RKB 21 STL211XRB 10 STL003RFLB 24 STL111RCMBP 29 STL13RKBP 21 STL211XRBP 10 STL003RFLBP 24 STL111RFB 30 STL13RLVB 21 STL211XRCB 10 STL003RFMB 24 STL111RFBP 30 STL13RLVBP 21 STL211XRCBP 10 STL003RFMBP 24 STL111RFMB 30 STL13RMB 21 STL211XRFHB 11 STL003RK 24 STL111RFMB 30 STL13RMB10GK 21 STL211XRFHBP 11 STL003RMB 24 STL111RHB 29 STL13RMB10GKP 21 STL211XRFHPG 11 STL003RS 24 STL111RMB <t< td=""><td></td><td></td><td></td><td></td><td></td></t<>					
STL003RBP 24 STL111RCFMB 30 STL13RHBBP 21 STL201XRFHXB 8 STL003RFB 24 STL111RCFMBP 30 STL13RK 21 STL201XRFHXBP 8 STL003RFBP 24 STL111RCMB 29 STL13RKB 21 STL211XRB 10 STL003RFLB 24 STL111RCMBP 29 STL13RKBP 21 STL211XRBP 10 STL003RFLBP 24 STL111RFB 30 STL13RLVB 21 STL211XRCB 10 STL003RFMB 24 STL111RFBP 30 STL13RLVBP 21 STL211XRCBP 10 STL003RFMBP 24 STL111RFMB 30 STL13RMB 21 STL211XRCBP 10 STL003RFMBP 24 STL111RFMBP 30 STL13RMB10GK 21 STL211XRFHB 11 STL003RMB 24 STL111RHB 29 STL13RMB10GKP 21 STL211XRFHPG 11 STL003RS 24 STL111RMB 29 STL13RS 21 STL21XRFHPGP 11 STL008RB 65 STL111RMB					
STL003RFB. 24 STL111RCFMBP 30 STL13RK 21 STL201XRFHXBP 8 STL003RFBP 24 STL111RCMB 29 STL13RKB 21 STL211XRB 10 STL003RFLB 24 STL111RCMBP 29 STL13RKBP 21 STL211XRBP 10 STL003RFLBP 24 STL111RFB 30 STL13RLVB 21 STL211XRCB 10 STL003RFMB 24 STL111RFBP 30 STL13RLVBP 21 STL211XRCBP 10 STL003RFMBP 24 STL111RFMB 30 STL13RMB 21 STL211XRFHB 11 STL003RK 24 STL111RFMBP 30 STL13RMB10GK 21 STL211XRFHBP 11 STL003RMB 24 STL111RHB 29 STL13RMB10GKP 21 STL211XRFHPG 11 STL003RS 24 STL111RMB 29 STL13RMBP 21 STL211XRFHPGP 11 STL003RS 24 STL111RMB 29 STL13RS 21 STL22AB 39 STL008RB 65 STL111RMBP 29<					
STL003RFBP 24 STL111RCMB 29 STL13RKB 21 STL211XRB 10 STL003RFLB 24 STL111RCMBP 29 STL13RKBP 21 STL211XRBP 10 STL003RFLBP 24 STL111RFB 30 STL13RLVB 21 STL211XRCB 10 STL003RFMB 24 STL111RFBP 30 STL13RLVBP 21 STL211XRCBP 10 STL003RFMBP 24 STL111RFMB 30 STL13RMB 21 STL211XRFHB 11 STL003RK 24 STL111RFMBP 30 STL13RMB10GK 21 STL211XRFHBP 11 STL003RMB 24 STL111RHB 29 STL13RMB10GKP 21 STL211XRFHPG 11 STL003RS 24 STL111RHB 29 STL13RMBP 21 STL21XRFHPGP 11 STL003RS 24 STL111RMB 29 STL13RS 21 STL22AB 39 STL008RB 65 STL111RMBP 29 STL14R1B 70 STL22ABP 39					
STL003RFLB 24 STL111RCMBP 29 STL13RKBP 21 STL211XRBP 10 STL003RFLBP 24 STL111RFB 30 STL13RLVB 21 STL211XRCB 10 STL003RFMB 24 STL111RFBP 30 STL13RLVBP 21 STL211XRCBP 10 STL003RFMBP 24 STL111RFMB 30 STL13RMB 21 STL211XRFHB 11 STL003RK 24 STL111RFMBP 30 STL13RMB10GK 21 STL211XRFHBP 11 STL003RMB 24 STL111RHB 29 STL13RMB10GKP 21 STL211XRFHPG 11 STL003RMBP 24 STL111RHBP 29 STL13RMBP 21 STL211XRFHPGP 11 STL003RS 24 STL111RMB 29 STL13RS 21 STL22AB 39 STL008RB 65 STL111RMBP 29 STL14R1B 70 STL22ABP 39					
STL003RFLBP 24 STL111RFB 30 STL13RLVB 21 STL211XRCB 10 STL003RFMB 24 STL111RFBP 30 STL13RLVBP 21 STL211XRCBP 10 STL003RFMBP 24 STL111RFMB 30 STL13RMB 21 STL211XRFHB 11 STL003RK 24 STL111RFMBP 30 STL13RMB10GK 21 STL211XRFHBP 11 STL003RMB 24 STL111RHB 29 STL13RMB10GKP 21 STL211XRFHPG 11 STL003RMBP 24 STL111RHBP 29 STL13RMBP 21 STL211XRFHPGP 11 STL003RS 24 STL111RMB 29 STL13RS 21 STL22AB 39 STL008RB 65 STL111RMBP 29 STL14R1B 70 STL22ABP 39					
STL003RFMB 24 STL111RFBP 30 STL13RLVBP 21 STL211XRCBP 10 STL003RFMBP 24 STL111RFMB 30 STL13RMB 21 STL211XRFHB 11 STL003RK 24 STL111RFMBP 30 STL13RMB10GK 21 STL211XRFHBP 11 STL003RMB 24 STL111RHB 29 STL13RMB10GKP 21 STL211XRFHPG 11 STL003RMBP 24 STL111RHBP 29 STL13RMBP 21 STL211XRFHPGP 11 STL003RS 24 STL111RMB 29 STL13RS 21 STL22AB 39 STL008RB 65 STL111RMBP 29 STL14R1B 70 STL22ABP 39					
STL003RFMBP 24 STL111RFMB 30 STL13RMB 21 STL211XRFHB 11 STL003RK 24 STL111RFMBP 30 STL13RMB10GK 21 STL211XRFHBP 11 STL003RMB 24 STL111RHB 29 STL13RMB10GKP 21 STL211XRFHPG 11 STL003RMBP 24 STL111RHBP 29 STL13RMBP 21 STL211XRFHPGP 11 STL003RS 24 STL111RMB 29 STL13RS 21 STL22AB 39 STL008RB 65 STL111RMBP 29 STL14R1B 70 STL22ABP 39					
STL003RK 24 STL111RFMBP 30 STL13RMB10GK 21 STL211XRFHBP 11 STL003RMB 24 STL111RHB 29 STL13RMB10GKP 21 STL211XRFHPG 11 STL003RMBP 24 STL111RHBP 29 STL13RMBP 21 STL211XRFHPGP 11 STL003RS 24 STL111RMB 29 STL13RS 21 STL22AB 39 STL008RB 65 STL111RMBP 29 STL14R1B 70 STL22ABP 39					
STL003RMB 24 STL111RHB 29 STL13RMB10GKP 21 STL211XRFHPG 11 STL003RMBP 24 STL111RHBP 29 STL13RMBP 21 STL211XRFHPGP 11 STL003RS 24 STL111RMB 29 STL13RS 21 STL2AB 39 STL008RB 65 STL111RMBP 29 STL14R1B 70 STL2ABP 39					
STL003RMBP 24 STL111RHBP 29 STL13RMBP 21 STL211XRFHPGP 11 STL003RS 24 STL111RMB 29 STL13RS 21 STL22AB 39 STL008RB 65 STL111RMBP 29 STL14R1B 70 STL22ABP 39					
STL003RS					
STL008RB					
CHANDER / CTILIAND / CTILIAND 70 CTINOCOAD 20					
51LUU8KBP	STLOO8RBP	65	STL116RB 67	STL14R1BP70	STL22CCAB39

STL22CCABP	30	STL38RB	62	STL543RB	26	STL69RRXB	17
STL22CCRB		STL38RBP		STL543RBP		STL69RRXBP	
STL22CCRBP		STL39RB		STL55AB		STL69RRXBPG	
STL22CCRBF		STL39RBP		STL55ABP		STL69RRXBPGP	
STL22RBH		STL3RB		STL55RB		STL69RRXCS	
STL22RBHP		STL3RBP		STL55RBP		STL69RRXPG	
STL22RBP		STL3RGB		STL55RFMB		STL69RRXPGP	
STL22RGP		STL3RGBP		STL55RFMBP		STL69RS	
STL22RCB							
		STL412RB		STL55RMB		STL 70 A D	
STL23A24B		STL412RBP		STL55RMBP		STL70AB	
STL23A24BP		STL413RB		STL56RB		STL70ABP	
STL23AB		STL413RBP		STL56RBP		STL70RB	
STL23ABP		STL413RFHXB		STL572AB		STL70RBP	
STL23CCRB		STL413RFHXBP		STL572ABP		STL71AKMB	
STL23CCRBP		STL413RMB		STL572RB		STL71AKMBP	
STL23R24B		STL413RMBP		STL572RBP		STL71AMB	
STL23R24BP		STL42AB		STL57RB		STL71AMBP	
STL23RB		STL42ABP		STL57RBP		STL72AB	
STL23RBP		STL42AMB		STL59RB		STL72ABP	
STL24AB		STL42AMBP		STL59RBP		STL72AMB	
STL24ABP		STL42RB		STL59RCB		STL72AMBP	
STL24RB		STL42RBP		STL59RCBP		STL72CAB	
STL24RBP		STL42RMB		STL602RB		STL72CABP	
STL264RB		STL42RMBP		STL602RBP	28	STL72R1224B	
STL264RBP		STL42RS	19	STL603RB		STL72R1224BP	33
STL264RCB	13	STL43A24B	18	STL603RBP	15	STL72RB	
STL264RCBP	13	STL43A24BP	18	STL60RB	59	STL72RBP	33
STL26RB	72	STL43AB	18	STL60RBP	59	STL72RK	33
STL26RBP	72	STL43ABP	18	STL60RLB	59	STL72RKB	33
STL27RB	72	STL43ABX	20	STL60RLBP	59	STL72RKBP	33
STL27RBP	72	STL43ABXP	20	STL616NTRB	68	STL72RMB	33
STL28RB		STL43ABXS	20	STL616NTRBP	68	STL72RMBP	
STL28RBP		STL43AKB	18	STL617NTRB		STL72RS	33
STL29RB		STL43AKBP		STL617NTRBP	68	STL73RB	36
STL29RBP		STL43R24B		STL61RB		STL73RBP	
STL2RB		STL43R24BP		STL61RBP		STL73RCB	
STL2RBP		STL43RB		STL61RLB		STL73RCBP	
STL2RGB		STL43RBHX		STL61RLBP		STL73REZB	
STL2RGBP		STL43RBHXP		STL63CRB		STL73REZBP	
STL33RB		STL43RBP		STL63CRBP		STL73RK	
STL33RBP		STL43RBX		STL63RB		STL73RKB	
STL34RB		STL43RBXP		STL63RBP		STL73RKBP	
STL34RBP		STL43RBXS		STL64RB		STL74RBK	
STL35AB		STL43RK		STL64RBP		STL74RBKP	
		STL43RKB				STL74RKB	
STL35ABP		STL43RKBP		STL64RCB		STL74RKBP	
STL35ACB				STL64RCBP			
STL35ACBP		STL43RMB		STL68RB		STL75AB	
STL35CCRB		STL43RMBP		STL68RBP		STL75ABP	
STL35CCRBP		STL512RB		STL68RPB		STL75AMB	
STL35RB		STL512RBP		STL68RPBP		STL75AMBP	
STL35RBP		STL512RCB		STL69CRPG		STL75AMFB	
STL36RB		STL512RCBP		STL69CRPGP		STL75AMFBP	
STL36RBP		STL52ARB		STL69R2PG		STL75AS	
STL36RPG		STL52ARBP		STL69R2PGP		STL76RB	
STL36RPGP		STL52ARS		STL69RB		STL76RBP	
STL36RS		STL53ARDB		STL69RBP		STL78AB	
STL37RB		STL53ARDBP		STL69RCB		STL78ABP	
STL37RBP		STL53ARPB		STL69RCBP		STL78RB	
STL37RPG		STL53ARPBP	55	STL69RK		STL78RBP	
STL37RPGP		STL53RCB		STL69RPG		STL78REZB	
STL37RS	73	STL53RCBP	18	STL69RPGP	47	STL78REZBP	34

STL78RK	34	TL12CS	291	TLL54TBP	217	UCL299CPG	209
STL78RLPB	34	TL14RK	240	TLL55FB	217	UCL299CPGP	209
STL78RLPBP		TL15RK		TLL55FBP		UCL32CDTB	229
STL78RPG		TL16RK		TLL56FB		UCL41CB	
STL78RPGP		TL21RK		TLL56FBP		UCL41CBP	
STL79RB		TL22RK		TLL56RK		UCL50CB	
STL79RBP		TL27BK		TLL57FB		UCL50CBP	
STL79RPG		TL29BK		TLL57FBP		UCL55CB	
STL79RPGP		TL35FS		TLL60FB		UCL55CBP	
STL79RS		TL35TB		TLL60FBP		UCL59CB	
STL7RS		TL35TS		TLL64FB		UCL60CB	
STL80RB		TL36RK		TLL64FBP		UCL60CBP	
STL80RBP		TL46FS		TLL70FB		UCL60CBPG	
STL82RB		TL46TS		TLL70FBP	219	UCL60CSBB	
STL82RBP	60	TL5RK		TLL71FB	220	UCL60CSBBP	
STL82RCB	33	TL60RK	242	TLL71FBP	220	UCL60CSNB	204
STL82RCBP	33	TL8RK	239	TLL72FB	220	UCL60CSNBP	204
STL83RB	60	TL9RK	240	TLL72FBP	220	UCL60CSWNB	204
STL83RBP	60	TLL0016RK	71	TLL73FB	221	UCL60CSWNBP	204
STL87RCB	53	TLL002RK	38	TLL73FBP		UCL65CB	205
STL87RCBP	53	TLL008RK		TLL80FB	222	UCL65CBP	205
STL87RCPG		TLL112RK		TLL80FBP		UCL66GB	
STL87RCPGP		TLL12RK		TLL90RK		UCL90BCB	
STL88RC1PG		TLL144FSL		TLL9RK		UCL90CB	
STL88RC1PGP		TLL149FB		UCL07CB		UCL91BCB	
STL88RCB		TLL149FBP		UCL07CB		UCL91BCKB	
STL88RCBP		TLL150FSL		UCL09CB		UCL91CB	
STL88RCBPG		TLL152FSL		UCL09CBB		UCL91CKB	
STL88RCBPGP		TLL160RK		UCL09CBBP		UCL92BCB	
STL88RCPG		TLL16RK		UCL09CBP		UCL92BCKB	
STL88RCPGP	34	TLL170RK		UCL09RCB		UCL92CB	
STL89RCB		TLL190RK		UCL09RCBP		UCL92CKB	207
STL89RCBP	49	TLL211XRTMK	10	UCL10BCKB	199	UL11BS	261
STL8R3B	63	TLL21RK	75	UCL10CK1B	199	UL53CB	287
STL8R3BP	63	TLL25FS	222	UCL10CKB	199	UL53CBP	287
STL8RB	63	TLL26RK	72	UCL10CKBP	199	UL56CB	287
STL8RBP	63	TLL28RK	66	UCL11CB	200	UL56CBP	287
STL8RGB	63	TLL29RK	66	UCL11CBP	200	UL94CB	286
STL8RGBP	63	TLL30FB	212	UCL11CKB	200	UL94CBP	286
STL90A24B		TLL30FBP		UCL11CKBP		UL97CPG	
STL90A24BP		TLL31RK		UCL11CKPG		UL97CPGP	
STL90AB		TLL36RK		UCL11CKPGP		ULL25CTB	
STL90ABP		TLL44FB		UCL13C2PG		ULL25CTB	
STL90R24B		TLL44FBP		UCL13C2PGP		ULL25CTVRB	
STL90R24B						ULL25CTVRBP	
		TLL45FB		UCL13CB2B			
STL90RB		TLL45FBP		UCL13CB2BP		ULL69APG	210
STL90RBP		TLL46CFB		UCL13CPG			
STL9R3B		TLL46CFBP		UCL13CPGP			
STL9R3BP		TLL46TB		UCL160CB			
STL9RB		TLL46TBP		UCL160CBP			
STL9RBP		TLL48FB	215	UCL178RFP2B	208		
STL9RGB		TLL48FBP	215	UCL178RFP2BP	208		
STL9RGBP	63	TLL50FB	215	UCL19CB	201		
TL106CS	291	TLL50FBP	215	UCL19CBP	201		
TL10CB	291	TLL51FB	216	UCL20CB	223		
TL10CBP		TLL51FBP	216	UCL21CB	224		
TL10CS		TLL51FRPG		UCL22CB			
TL10SS		TLL52FB		UCL23CB			
TL11CPG		TLL52FBP		UCL24CB			
TL11CPGP		TLL52FWB		UCL24CFB			
TL11RK		TLL54TB		UCL25CB			
IET HXX	20/	1220710	∠1/	OCLZOOD	∠∠∪		

4-INCH STOP, TURN, TAIL LAMPS













Base P/N	STL003RB	STL413RB	STL13RB	STL43RB	STL603RB	STL543RB
Also Available	00			Clear lens, red LEDs		
Brand	ONE LED LAMPS	FLEET COUNT	FLEET COUNT	CONCORD D	LIGHTGUIDE	HYPER
LED Qty	1	4	7	10	12	12
Mounting	Recess Grommet Recess Flange	Recess Grommet Surface Mount Reflex Flange	Recess Grommet Recess Flange Surface Mount Reflex Flange	Recess Grommet Recess Flange Reflex Flange	Recess Grommet	Recess Grommet
Connections	Locking PL3		Round male pin			
FMVSS	Red: S T I Yellow: I P White: (2) R	S2 T2 I6	Red: S T I Yellow: I6 P White: (2)R	Red: S T I P2 Yellow: I6 P White: (2)R	\$2 T2 I6	\$11
Amp draw 12/24VDC	12.8VDC .007A Tail, .25A Stop	12.8VDC .008A Tail, .160A Stop	12.8VDC .033A Tail, .214A Stop	12.8VDC .027A Tail, .208A Stop 24VDC .014A Tail, .104A Stop	12.8VDC .114A Tail, .421A Stop	12.8VDC .043A Tail, .174A Stop
Tech Drawing	1 11/16	\$ 45/16"	4 5/16	4 5/16" 1 15/16"	4 5/16°	4 5/16" 1 15/16"
Hole Cut-out	4.5"	4.5"	4.5"	4.5"	4.5"	4.5"
Retail	RetailReady		Retail Ready	Retail Ready		

LED LIFETIME













				Ale last		
STL55RB	STL23RB	STL101RB	STL201 XRB	STL201 XRFHXB	STL201RFMB	
Cotronics [L] D	MIRO-FLEX	Glo Light	(JUSTON)	(JSON)	(JUSTON)	
21	12/16	21	20	20	24	
Recess Grommet Recess Flange	Recess Grommet	Recess Grommet Recess Flange	Recess Grommet	Surfance Mount Reflex Flange	Recess Flange	
				8		
Red: S T I Yellow: Ió P	Red: S T I Yellow: I P	Red: \$2 T2 I6 Yellow: I6 P White: (2)R	S2 T2 I6 (2)R	S2 T2 I6 (2)R A	S2 T2 I6 (2)R	
12.8VDC .010A Tail, .280A Stop	12.8VDC .023A Tail, .181A Stop 24VDC .012A Tail, .091A Stop	12.8VDC .161A Tail, .361A Stop	12.8VDC / .240A Tail .265A Stop, .30A Back-Up	12.8VDC / .145A Tail .375A Stop, .30A Back-Up	12.8VDC / .139A Tail .324A Stop, .297A Back-Up	
4 5/16"	45/16" 23/8"	4 5/16"	4 5/16* 7/8	5.44	Ø 5 1/2* 5/16*	
4.5"	4.5"	4.5"	4.5"	4.5"	4.5"	






- Surface Mount Device
- Fewer connection points, fewer corrosion points
- Automated manufacturing increases production efficiency
- Thinner, more compact designs fit more applications








6-INCH STOP, TURN, TAIL LAMPS

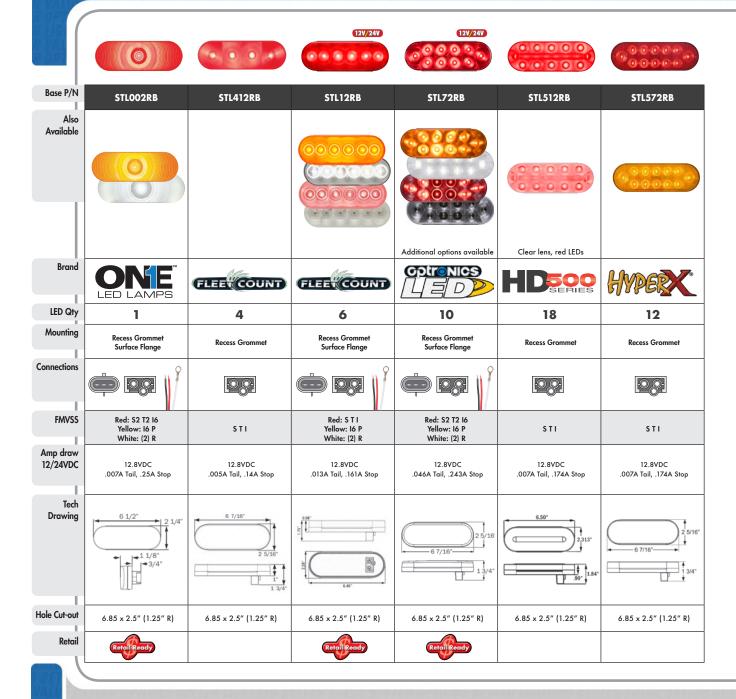

Accessories

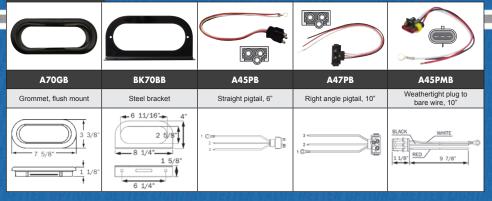

LED LIFETIME













STL22RB	STL602RB	STL111RB	STL70RB	STL1211RCFHPG	STL211XRB
Clear lens, red LEDs					Clear lens, red LEDs
MIRO-FLEX	LIGHTGUIDE	Glo Light		GloLight*	(JUSION)
12/16	22	22	48/56	22	16
Recess Grommet	Recess Grommet	Recess Grommet Recess Flange Surface Flange	Recess Grommet	Surface Flange	Recess Grommet Surface Flange
P					
STI	Red: S2 T2 I6 White: (2) R	Red: S2 T2 I6 Yellow: I6 P White: (2)R	Red: STIP2 Yellow: IP2P	S2 T2 I6 (2)R	S T I (2)R
12.8VDC .007A Tail, .187A Stop	12.8VDC .007A Tail, .187A Stop	12.8VDC / .268A Tail, .582A Stop, .386A Back-up	12.8VDC .054A Tail, .362A Stop	12.8VDC / .02A Tail, .375A Stop, .242A Back-Up	12.8VDC / .020A Tail, .375A Stop, .242A Back-up
15/16	5/16° 25/16° 115/16° 13	5/16	6 1/2*	7.52° 6.99°	0 7/16" 2 5/16" 1 3/16" 1 15/16"
6.85 × 2.5" (1.25" R)	6.85 × 2.5" (1.25" R)	6.85 x 2.5" (1.25" R)	6.85 × 2.5" (1.25" R)	7.52 x 3.25" (1.25" R)	6.85 x 2.5" (1.25" R)
		RetailReady			RetailReady





- Surface Mount Device
- Fewer connection points, fewer corrosion points
- Automated manufacturing increases production efficiency
- Thinner, more compact designs fit more applications



Better heat distribution







LED WORK LIGHTS

SMD LED TECHNOLOGY FOR LONG TERM RELIABILITY

						Q			
Raw Lumen	4800	4000	3200	2400	2160	2160	2160	2160	2160
Effective Lumen	3360	2800	2240	1680	1510	1492	1490	1490	1490
Bulk P/N	TLL70FB	TLL56FB	TLL64FB	TLL149FB	TLL55FB	TLL- 46CFB	TLL71FB	TLL72FB	TLL73FB
LEDS	6 SMD	8 SMD	4 SMD	10 SMD	9 SMD	9 SMD	9 SMD	9 SMD	9 SMD
Beam	Flood	Flood	Flood	Flood	Flood	Flood	Flood	Flood	Flood
Lens	Poly- carbonate	Poly- carbonate	Poly- carbonate	Poly- carbonate	Poly- carbonate	Poly- carbonate	Poly- carbonate	Poly- carbonate	Poly- carbonate
Housing	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Hardware	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Weight	1.41 lbs.	3.53 lbs.	1.41 lbs.	.95 lbs.	1.35 lbs.	1.50 lbs.	1.41 lbs.	1.5 lbs.	1.61 lbs.
Dims	4.375"W 5.375"H 2.625"D	7.161"W 6.093"H 4.313"D	4.187"W 5.375"H 3.0"D	6.625"W 3.5"H 2.665"D	4.875"W 6.5"H 2.0"D	5.0"W 5.75"H 2.375"D	4.0"W 5.0"H 2.25"D	5.0"W 5.375"H 2.25"D	5.0"W 7.5"H 3.25"D
IP Rating	IP69K	IP69K	IP69K	IP69K	IP69K	IP69K	IP69K	IP69K	IP69K
Amp Draw 12.8VDC	2.8A	3.7A	2.9A	2.05A	1.5A	1.65A	1.43A	1.43A	1.43A
Amp Draw 24VDC	1.43A	2A	1.5A	.97A	.73A	1.0A	.66A	.66A	.66A



- Wide Angle Beam



Flood Beam Pattern





IP69K RATING

Highest designation available for water ingress testing, offering increased reliability and service life when subjected to severe environmental conditions or cleaning methods.

